

**Final datasheet**

**CoolSiC™ 1200 V SiC Trench MOSFET**

**Features**

- $V_{DS} = 1200\text{ V}$  at  $T_{vj} = -55...175^{\circ}\text{C}$
- $I_{DC} = 38\text{ A}$  at  $T_C = 25^{\circ}\text{C}$
- $R_{DS(on)} = 60\text{ m}\Omega$  at  $V_{GS} = 20\text{ V}$ ,  $T_{vj} = 25^{\circ}\text{C}$
- New performance-optimized chip technology (Gen1p) with improved  $R_{DS(on)}$  \* A FOM
- Increased recommended turn-on voltage ( $V_{GS(on)} = 20\text{ V}$ ) for lower  $R_{DS(on)}$
- Best in class switching energy for lower switching losses and reduced cooling efforts
- Lowest device capacitances for higher switching speeds and higher power density
- A combination of low  $C_{rSS}/C_{iSS}$  ratio and high  $V_{GS(th)}$  to avoid parasitic turn-on and enable unipolar gate driving
- Reduced total gate charge  $Q_{Gtot}$  for lower driving power and losses
- .XT die attach technology for best in class thermal performance
- Sense pin for optimized switching performance
- Suitable for HV creepage requirements

**Potential applications**

- On-board charger
- DC/DC converter
- Auxiliary drives


**Product validation**

- Qualified for Automotive Applications. Product Validation according to AEC-Q100/101


**Description**

Pin definition:

- 1 – drain
- 2 – source
- 3 – Kelvin sense contact
- 4 – gate



- Halogen-free
- Green
- Lead-free
- RoHS
- AEC-Q100 Qualified

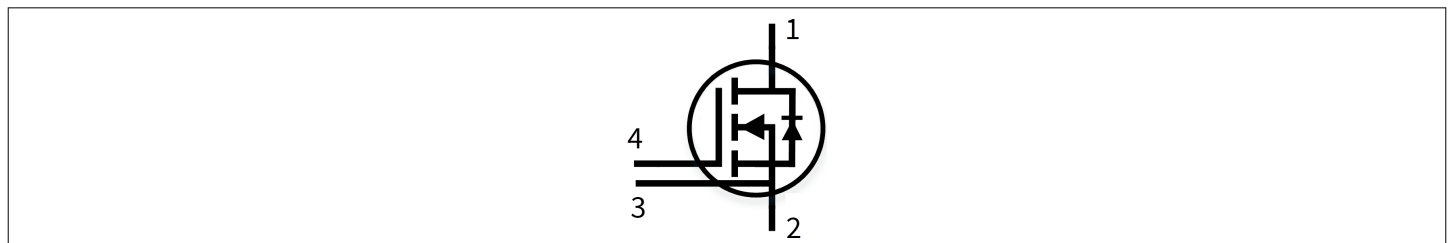

Type	Package	Marking
AIMZHN120R060M1T	PG-TO247-4-STD-NN6.7	A12M1N060

## Table of contents

	<b>Description</b> .....	1
	<b>Features</b> .....	1
	<b>Potential applications</b> .....	1
	<b>Product validation</b> .....	1
	<b>Table of contents</b> .....	2
<b>1</b>	<b>Package</b> .....	3
<b>2</b>	<b>MOSFET</b> .....	3
<b>3</b>	<b>Body diode (MOSFET)</b> .....	5
<b>4</b>	<b>Characteristics diagrams</b> .....	7
<b>5</b>	<b>Package outlines</b> .....	12
<b>6</b>	<b>Testing conditions</b> .....	13
	<b>Revision history</b> .....	14
	<b>Disclaimer</b> .....	15

1 Package

## 1 Package

**Table 1** Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Storage temperature	$T_{stg}$		-55		150	°C
Soldering temperature	$T_{sold}$				260	°C
MOSFET/body diode thermal resistance, junction-case	$R_{th(j-c)}$			0.58	0.76	K/W

**Note:** Not subject to production test. Parameter verified by design/characterization.

## 2 MOSFET

**Table 2** Maximum rated values

Parameter	Symbol	Note or test condition	Values	Unit	
Drain-source voltage	$V_{DSS}$	$T_{vj} = -55...175\text{ °C}$	1200	V	
Continuous DC drain current for $R_{th(j-c,max)}$ , limited by $T_{vj(max)}$	$I_{DDC}$	$V_{GS} = 20\text{ V}$	$T_c = 25\text{ °C}$	38	A
			$T_c = 100\text{ °C}$	27	
Peak drain current, $t_p$ limited by $T_{vj(max)}$	$I_{DM}$	$V_{GS} = 20\text{ V}$	97	A	
Gate-source voltage, max. transient voltage <sup>1)</sup>	$V_{GS}$	$t_p \leq 0.5\text{ }\mu\text{s}$ , $D < 0.01$	-10...25	V	
Gate-source voltage, max. static voltage	$V_{GS}$		-5...23	V	
Avalanche energy, single pulse	$E_{AS}$	$I_D = 10\text{ A}$ , $V_{DD} = 50\text{ V}$ , $L = 3.6\text{ mH}$	180	mJ	
Power dissipation, limited by $T_{vj(max)}$	$P_{tot}$		$T_c = 25\text{ °C}$	197	W
			$T_c = 100\text{ °C}$	99	

1) **Important note:** The selection of positive and negative gate-source voltages impacts the long-term behavior of the device. The design guidelines described in Application Note AN2018-09 must be considered to ensure sound operation of the device over the planned lifetime.

**Table 3** Recommended values

Parameter	Symbol	Note or test condition	Values	Unit
Recommended turn-on gate voltage	$V_{GS(on)}$		20	V
Recommended turn-off gate voltage	$V_{GS(off)}$		0	V

**Table 4 Characteristic values**

Parameter	Symbol	Note or test condition	Values			Unit	
			Min.	Typ.	Max.		
Drain-source on-state resistance	$R_{DS(on)}$	$I_D = 13\text{ A}$	$T_{vj} = 25\text{ °C}$ , $V_{GS(on)} = 20\text{ V}$		60	75	mΩ
			$T_{vj} = 100\text{ °C}$ , $V_{GS(on)} = 20\text{ V}$		84		
			$T_{vj} = 175\text{ °C}$ , $V_{GS(on)} = 20\text{ V}$		120		
			$T_{vj} = 25\text{ °C}$ , $V_{GS(on)} = 18\text{ V}$		65		
Gate-source threshold voltage	$V_{GS(th)}$	$I_D = 4.3\text{ mA}$ , $V_{DS} = V_{GS}$ (tested after 1 ms pulse at $V_{GS} = 20\text{ V}$ )	$T_{vj} = 25\text{ °C}$	3.5	4.3	5.1	V
			$T_{vj} = 175\text{ °C}$		3.8		
Zero gate-voltage drain current	$I_{DSS}$	$V_{DS} = 1200\text{ V}$ , $V_{GS} = 0\text{ V}$	$T_{vj} = 25\text{ °C}$		0.3	13	μA
			$T_{vj} = 175\text{ °C}$		50		
Gate leakage current	$I_{GSS}$	$V_{DS} = 0\text{ V}$	$V_{GS} = 25\text{ V}$			100	nA
			$V_{GS} = -10\text{ V}$			-100	
Forward transconductance	$g_{fs}$	$I_D = 13\text{ A}$ , $V_{DS} = 20\text{ V}$		8.5		S	
Short-circuit withstand time <sup>1)</sup>	$t_{SC}$	$V_{DD} \leq 800\text{ V}$ , $V_{DS,peak} < 1200\text{ V}$ , $T_{vj(start)} = 25\text{ °C}$ , $R_{G,ext} = 2\text{ }\Omega$	$V_{GS(on)} = 20\text{ V}$		1.5		μs
			$V_{GS(on)} = 18\text{ V}$		2		
			$V_{GS(on)} = 15\text{ V}$		2.5		
Internal gate resistance	$R_{G,int}$	$f = 1\text{ MHz}$ , $V_{AC} = 25\text{ mV}$		3.7		Ω	
Input capacitance	$C_{iss}$	$V_{DD} = 800\text{ V}$ , $V_{GS} = 0\text{ V}$ , $f = 100\text{ kHz}$ , $V_{AC} = 25\text{ mV}$		880		pF	
Output capacitance	$C_{oss}$	$V_{DD} = 800\text{ V}$ , $V_{GS} = 0\text{ V}$ , $f = 100\text{ kHz}$ , $V_{AC} = 25\text{ mV}$		43		pF	
Reverse transfer capacitance	$C_{rss}$	$V_{DD} = 800\text{ V}$ , $V_{GS} = 0\text{ V}$ , $f = 100\text{ kHz}$ , $V_{AC} = 25\text{ mV}$		2		pF	
$C_{oss}$ stored energy	$E_{oss}$	$V_{DD} = 800\text{ V}$ , $V_{GS} = 0\text{ V}$ , $f = 100\text{ kHz}$ , $V_{AC} = 25\text{ mV}$		18		μJ	
Total gate charge	$Q_G$	$V_{DD} = 800\text{ V}$ , $I_D = 13\text{ A}$ , $V_{GS} = 0/20\text{ V}$ , turn-on pulse		32		nC	
Plateau gate charge	$Q_{GS(pl)}$	$V_{DD} = 800\text{ V}$ , $I_D = 13\text{ A}$ , $V_{GS} = 0/20\text{ V}$ , turn-on pulse		8		nC	
Gate-to-drain charge	$Q_{GD}$	$V_{DD} = 800\text{ V}$ , $I_D = 13\text{ A}$ , $V_{GS} = 0/20\text{ V}$ , turn-on pulse		5		nC	
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 800\text{ V}$ , $I_D = 13\text{ A}$ , $V_{GS} = 0/20\text{ V}$ , $R_{GS(on)} = 2\text{ }\Omega$ , $R_{GS(off)} = 2\text{ }\Omega$ , $L_\sigma = 15\text{ nH}$	$T_{vj} = 25\text{ °C}$		9		ns
			$T_{vj} = 175\text{ °C}$		9		

(table continues...)

**Table 4** (continued) **Characteristic values**

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Rise time	$t_r$	$V_{DD} = 800\text{ V}, I_D = 13\text{ A},$ $V_{GS} = 0/20\text{ V},$ $R_{GS(on)} = 2\ \Omega,$ $R_{GS(off)} = 2\ \Omega, L_\sigma = 15\text{ nH}$	$T_{vj} = 25\text{ }^\circ\text{C}$	6		ns
			$T_{vj} = 175\text{ }^\circ\text{C}$	8		
Turn-off delay time	$t_{d(off)}$	$V_{DD} = 800\text{ V}, I_D = 13\text{ A},$ $V_{GS} = 0/20\text{ V},$ $R_{GS(on)} = 2\ \Omega,$ $R_{GS(off)} = 2\ \Omega, L_\sigma = 15\text{ nH}$	$T_{vj} = 25\text{ }^\circ\text{C}$	17		ns
			$T_{vj} = 175\text{ }^\circ\text{C}$	18		
Fall time	$t_f$	$V_{DD} = 800\text{ V}, I_D = 13\text{ A},$ $V_{GS} = 0/20\text{ V},$ $R_{GS(on)} = 2\ \Omega,$ $R_{GS(off)} = 2\ \Omega, L_\sigma = 15\text{ nH}$	$T_{vj} = 25\text{ }^\circ\text{C}$	9		ns
			$T_{vj} = 175\text{ }^\circ\text{C}$	10		
Turn-on energy	$E_{on}$	$V_{DD} = 800\text{ V}, I_D = 13\text{ A},$ $V_{GS} = 0/20\text{ V},$ $R_{GS(on)} = 2\ \Omega,$ $R_{GS(off)} = 2\ \Omega, L_\sigma = 15\text{ nH}$	$T_{vj} = 25\text{ }^\circ\text{C}$	77		$\mu\text{J}$
			$T_{vj} = 175\text{ }^\circ\text{C}$	128		
Turn-off energy	$E_{off}$	$V_{DD} = 800\text{ V}, I_D = 13\text{ A},$ $V_{GS} = 0/20\text{ V},$ $R_{GS(on)} = 2\ \Omega,$ $R_{GS(off)} = 2\ \Omega, L_\sigma = 15\text{ nH}$	$T_{vj} = 25\text{ }^\circ\text{C}$	50		$\mu\text{J}$
			$T_{vj} = 175\text{ }^\circ\text{C}$	51		
Total switching energy	$E_{tot}$	$V_{DD} = 800\text{ V}, I_D = 13\text{ A},$ $V_{GS} = 0/20\text{ V},$ $R_{GS(on)} = 2\ \Omega,$ $R_{GS(off)} = 2\ \Omega, L_\sigma = 15\text{ nH}$	$T_{vj} = 25\text{ }^\circ\text{C}$	127		$\mu\text{J}$
			$T_{vj} = 175\text{ }^\circ\text{C}$	179		
Virtual junction temperature	$T_{vj}$		-55		175	$^\circ\text{C}$

1) verified by the design/characterization

**Note:** Dynamic test circuit see Fig. F.

### 3 Body diode (MOSFET)

**Table 5** Maximum rated values

Parameter	Symbol	Note or test condition	Values	Unit	
Drain-source voltage	$V_{DSS}$	$T_{vj} = -55\dots175\text{ }^\circ\text{C}$	1200	V	
Continuous reverse drain current for $R_{th(j-c,max)}$ , limited by $T_{vj(max)}$	$I_{SDC}$	$V_{GS} = 0\text{ V}$	$T_c = 25\text{ }^\circ\text{C}$	30	A
			$T_c = 100\text{ }^\circ\text{C}$	21	
Peak reverse drain current, $t_p$ limited by $T_{vj(max)}$	$I_{SM}$	$V_{GS} = 0\text{ V}$	30	A	

**Table 6** Characteristic values


Parameter	Symbol	Note or test condition	Values			Unit	
			Min.	Typ.	Max.		
Drain-source reverse voltage	$V_{SD}$	$I_{SD} = 13 \text{ A}, V_{GS} = 0 \text{ V}$	$T_{vj} = 25 \text{ }^\circ\text{C}$		3.9	5	V
			$T_{vj} = 100 \text{ }^\circ\text{C}$		3.8		
			$T_{vj} = 175 \text{ }^\circ\text{C}$		3.7		
MOSFET forward recovery charge	$Q_{fr}$	$V_{DD} = 800 \text{ V},$ $I_{SD} = 13 \text{ A}, V_{GS} = 0 \text{ V},$ $di_{SD}/dt = 3000 \text{ A}/\mu\text{s}, Q_{fr}$ includes also $Q_C$	$T_{vj} = 25 \text{ }^\circ\text{C}$		120		nC
			$T_{vj} = 175 \text{ }^\circ\text{C}$		203		
MOSFET peak forward recovery current	$I_{frm}$	$V_{DD} = 800 \text{ V},$ $I_{SD} = 13 \text{ A}, V_{GS} = 0 \text{ V},$ $di_{SD}/dt = 3000 \text{ A}/\mu\text{s}, Q_{fr}$ includes also $Q_C$	$T_{vj} = 25 \text{ }^\circ\text{C}$		8.5		A
			$T_{vj} = 175 \text{ }^\circ\text{C}$		17		
Virtual junction temperature	$T_{vj}$			-55		175	$^\circ\text{C}$

## 4 Characteristics diagrams

### Reverse bias safe operating area (RBSOA)


$$I_{DS} = f(V_{DS})$$

$$T_{vj} \leq 175\text{ °C}, V_{GS} = 0/20\text{ V}, T_c = 25\text{ °C}$$

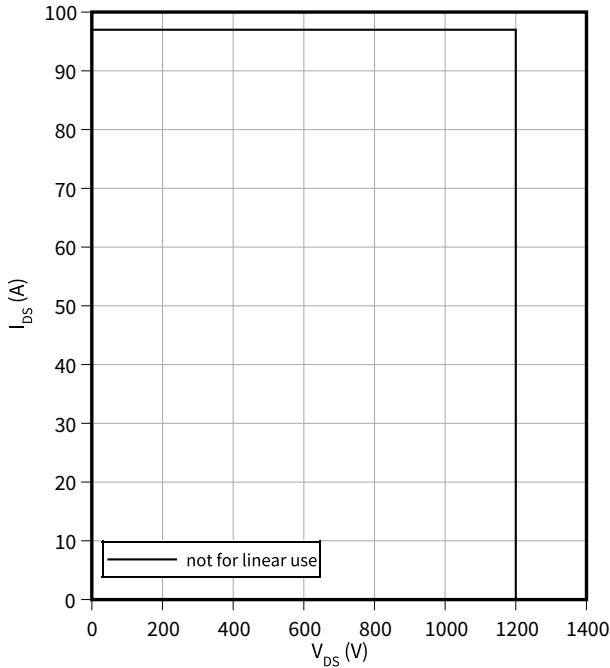


### Power dissipation as a function of case temperature

$$P_{tot} = f(T_c)$$

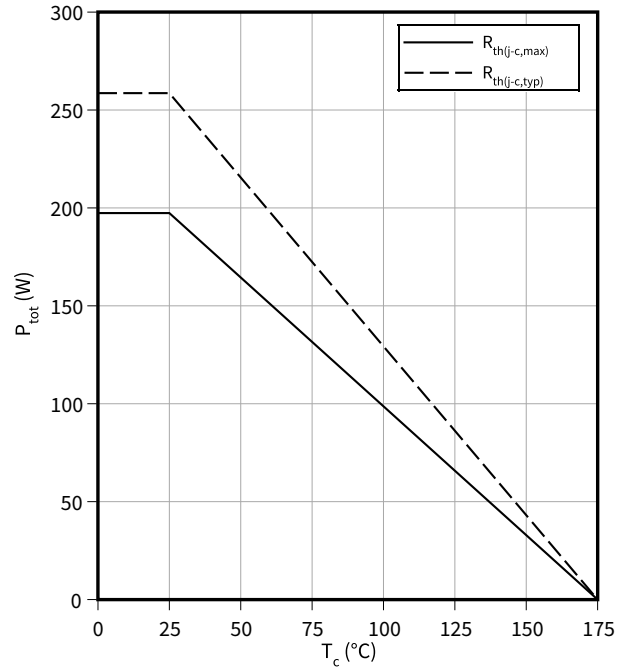

### Maximum DC drain to source current as a function of case temperature


$$I_{DS} = f(T_c)$$

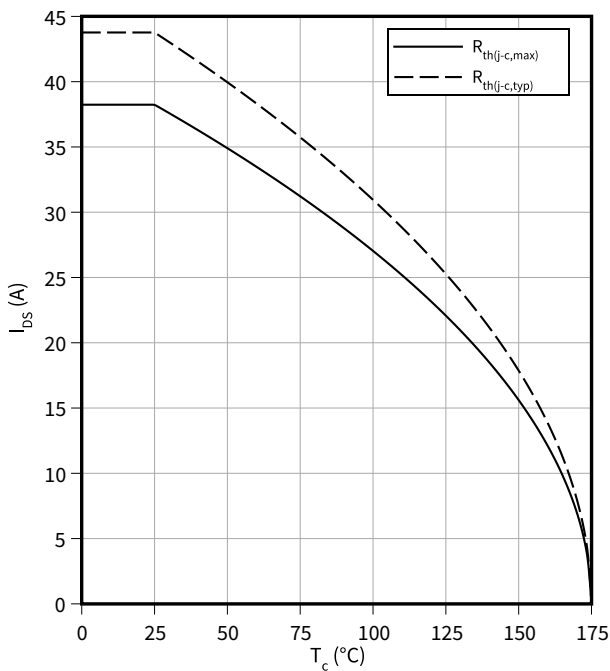

### Maximum source to drain current as a function of case temperature

$$I_{SD} = f(T_c)$$


$$V_{GS} = 0\text{ V}$$

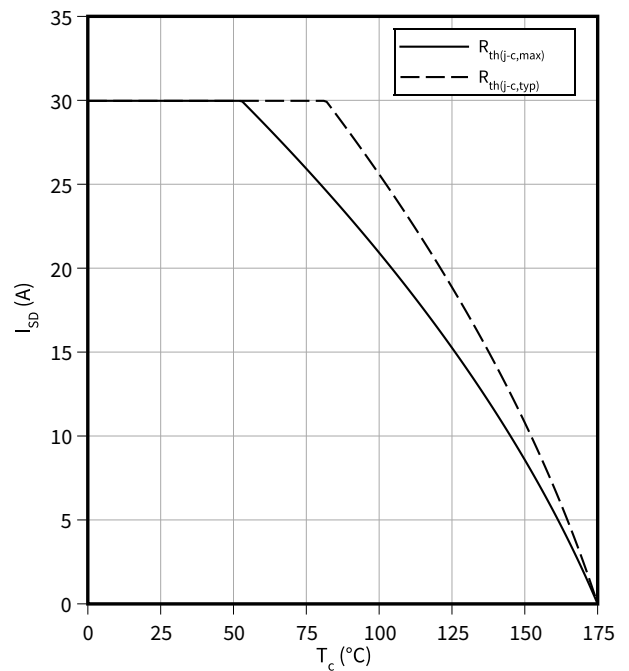

**4 Characteristics diagrams**


**Typical transfer characteristic**

$I_{DS} = f(V_{GS})$   
 $V_{DS} = 20\text{ V}$

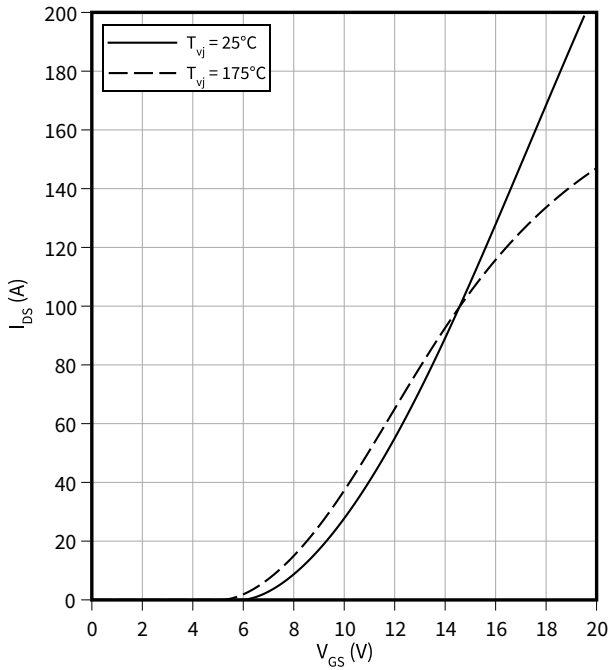


**Typical gate-source threshold voltage as a function of junction temperature**

$V_{GS(th)} = f(T_{vj})$   
 $I_D = 4.3\text{ mA}$

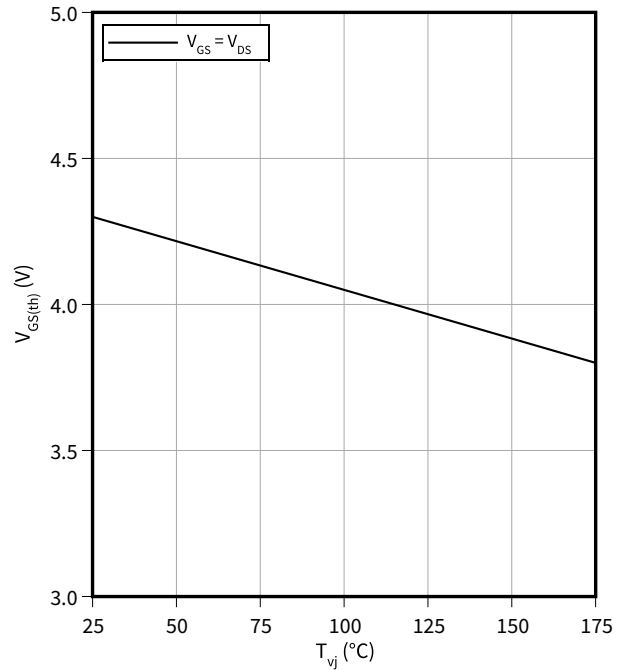


**Typical output characteristic,  $V_{GS}$  as parameter**

$I_{DS} = f(V_{DS})$   
 $T_{vj} = 25\text{ °C}$

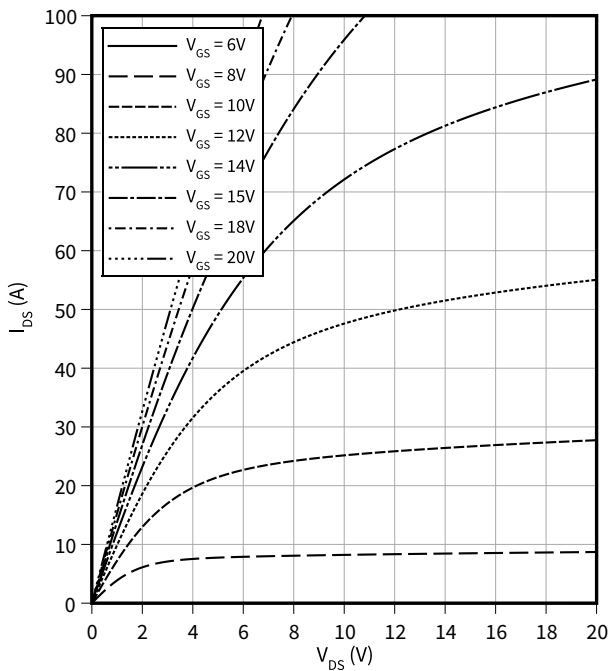

**Typical output characteristic,  $V_{GS}$  as parameter**

$I_{DS} = f(V_{DS})$   
 $T_{vj} = 175\text{ °C}$

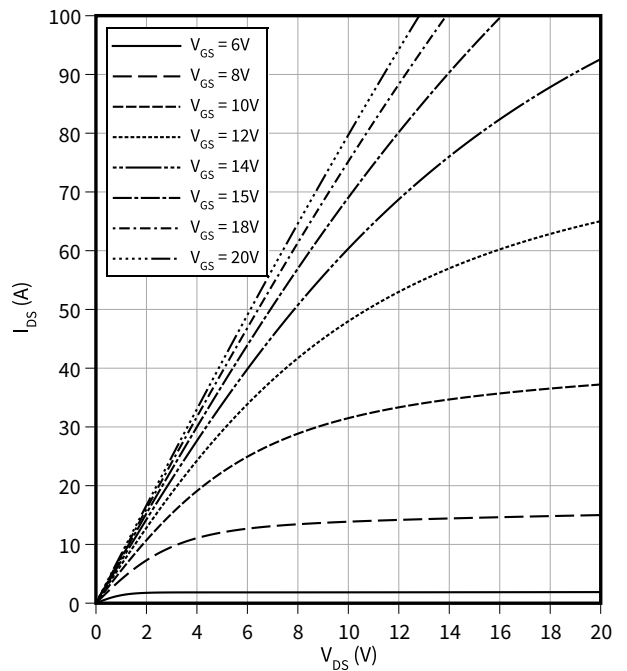




4 Characteristics diagrams


**Typical on-state resistance as a function of junction temperature**

$R_{DS(on)} = f(T_{vj})$   
 $I_D = 13 \text{ A}$

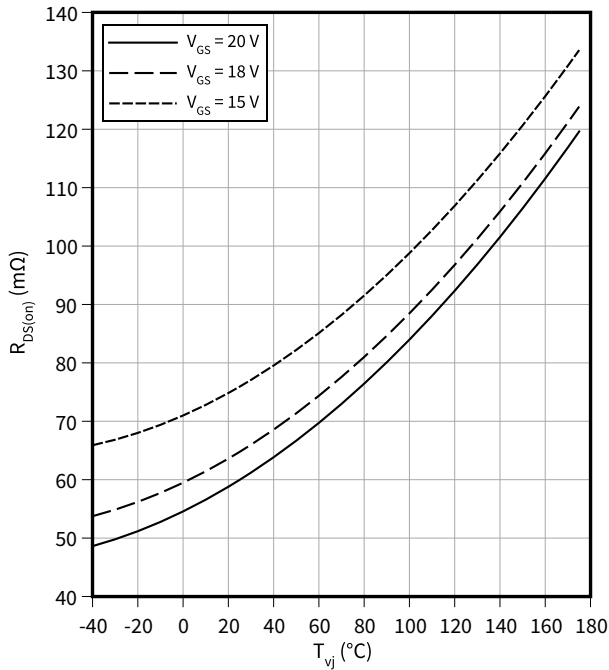


**Typical gate charge**

$V_{GS} = f(Q_G)$   
 $I_D = 13 \text{ A}, V_{DS} = 800 \text{ V}$

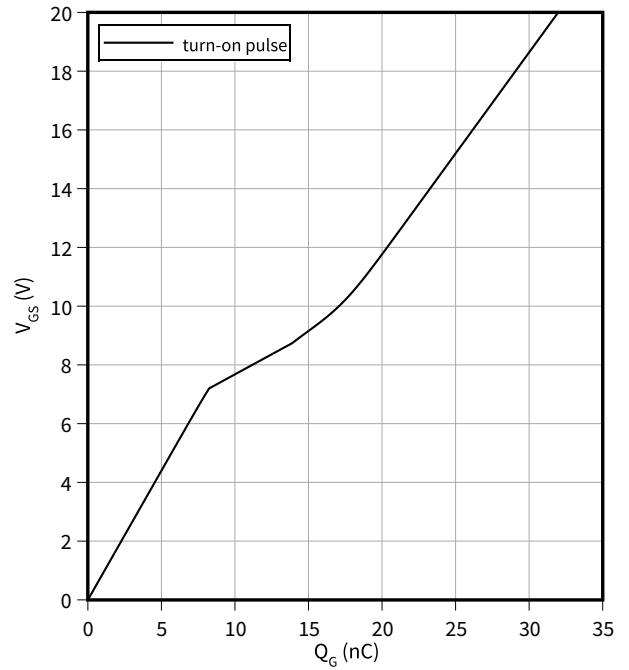


**Typical capacitance as a function of drain-source voltage**

$C = f(V_{DS})$   
 $f = 100 \text{ kHz}, V_{GS} = 0 \text{ V}$

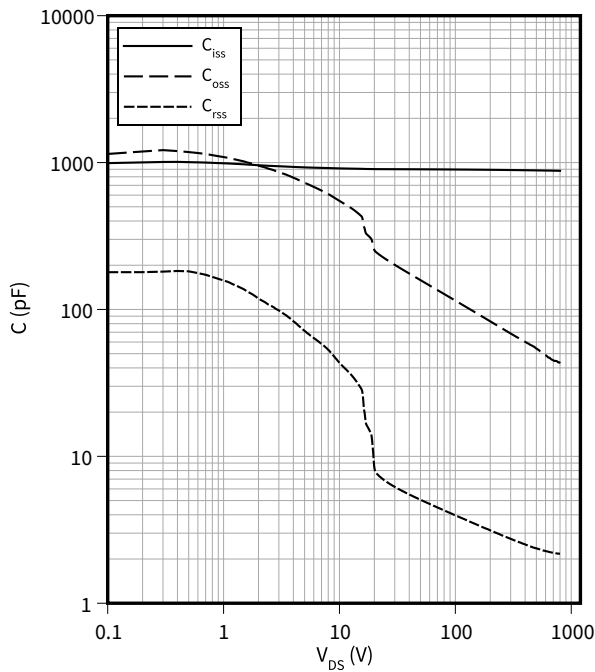

**Typical reverse drain voltage as function of junction temperature**


$V_{SD} = f(T_{vj})$   
 $I_{SD} = 13 \text{ A}, V_{GS} = 0 \text{ V}$

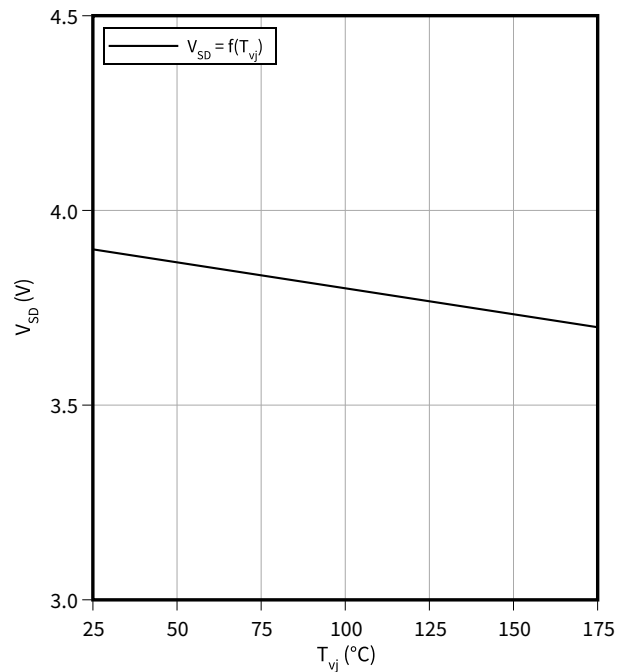

4 Characteristics diagrams


**Typical reverse drain current as function of reverse drain voltage,  $V_{GS}$  as parameter**

$I_{SD} = f(V_{SD})$   
 $T_{vj} = 25\text{ °C}$

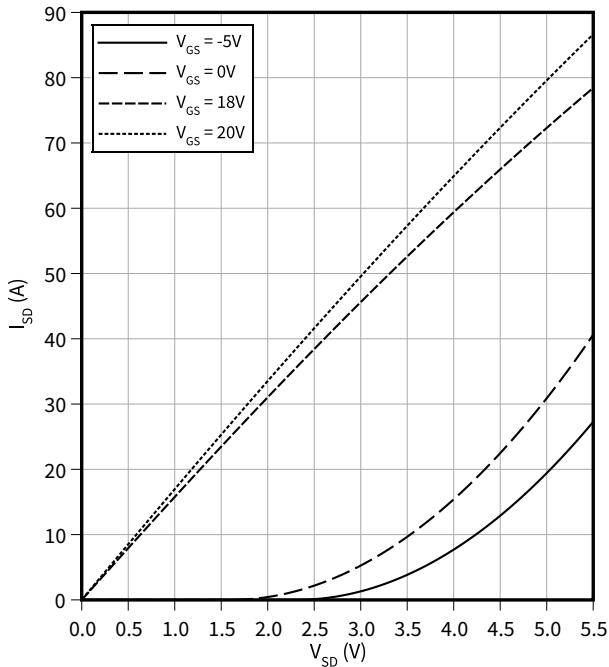


**Typical reverse drain current as function of reverse drain voltage,  $V_{GS}$  as parameter**

$I_{SD} = f(V_{SD})$   
 $T_{vj} = 175\text{ °C}$

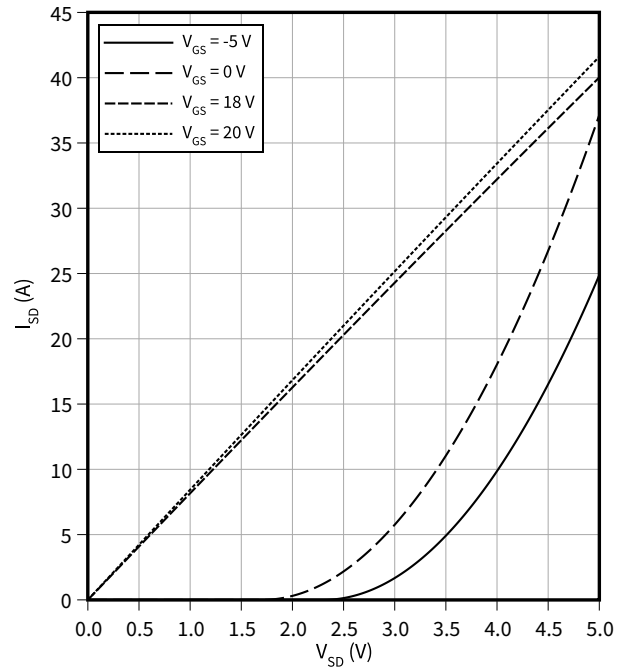


**Typical switching energy as a function of junction temperature, test circuit in Fig. F, 2nd device own body diode:  $V_{GS} = 0\text{ V}$**

$E = f(T_{vj})$   
 $I_D = 13\text{ A}$ ,  $R_{G,ext} = 2\ \Omega$ ,  $V_{DD} = 800\text{ V}$ ,  $V_{GS} = 0/20\text{ V}$

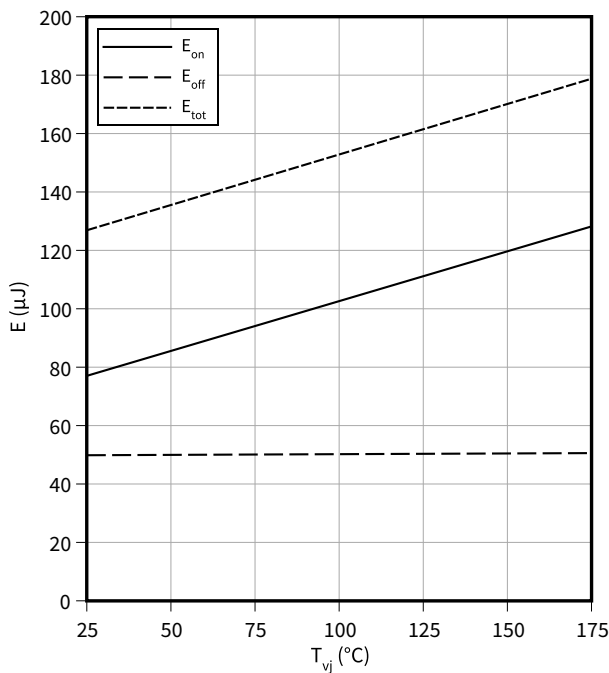

**Typical switching energy as a function of drain current, test circuit in Fig. F, 2nd device own body diode:  $V_{GS} = 0\text{ V}$**

$E = f(I_D)$   
 $V_{GS} = 0/20\text{ V}$ ,  $T_{vj} = 175\text{ °C}$ ,  $R_{G,ext} = 2\ \Omega$ ,  $V_{DD} = 800\text{ V}$

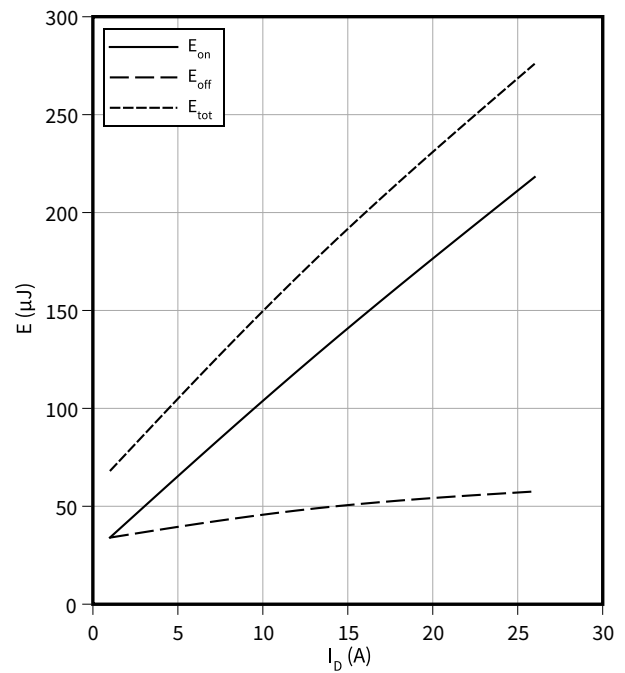


4 Characteristics diagrams

**Typical switching energy as a function of gate resistance, test circuit in Fig. F, 2nd device own body diode:  $V_{GS} = 0\text{ V}$**

$E = f(R_{G,ext})$


$V_{GS} = 0/20\text{ V}$ ,  $I_D = 13\text{ A}$ ,  $T_{vj} = 175\text{ °C}$ ,  $V_{DD} = 800\text{ V}$

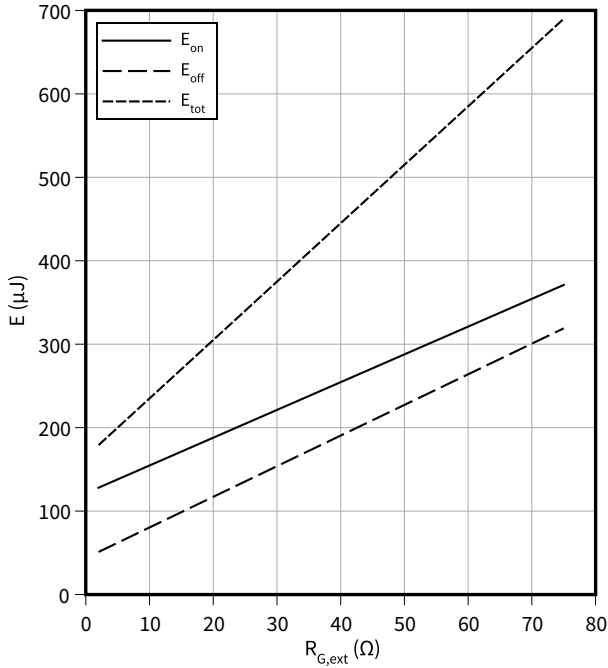

**Typical switching times as a function of gate resistance, test circuit in Fig. F, 2nd device own body diode:  $V_{GS} = 0\text{ V}$**

$t = f(R_{G,ext})$


$V_{GS} = 0/20\text{ V}$ ,  $I_D = 13\text{ A}$ ,  $T_{vj} = 175\text{ °C}$ ,  $V_{DD} = 800\text{ V}$

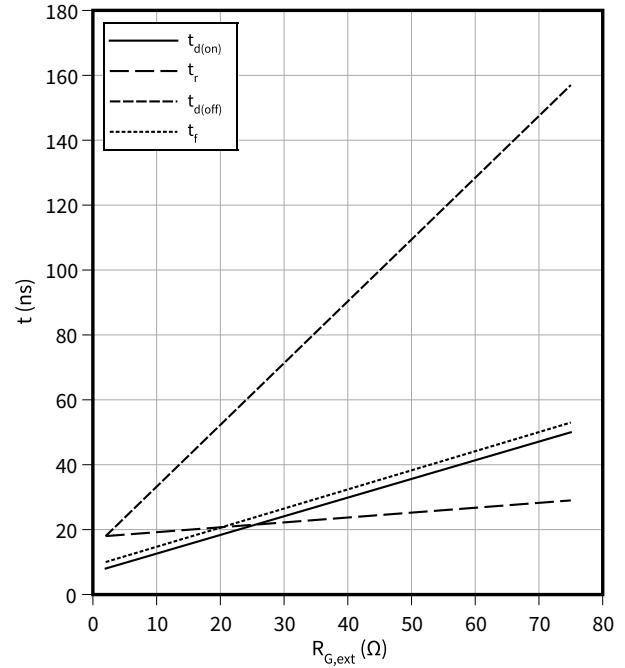

**Max. transient thermal impedance (MOSFET/diode)**

$Z_{th(j-c),max} = f(t_p)$

$D = t_p/T$

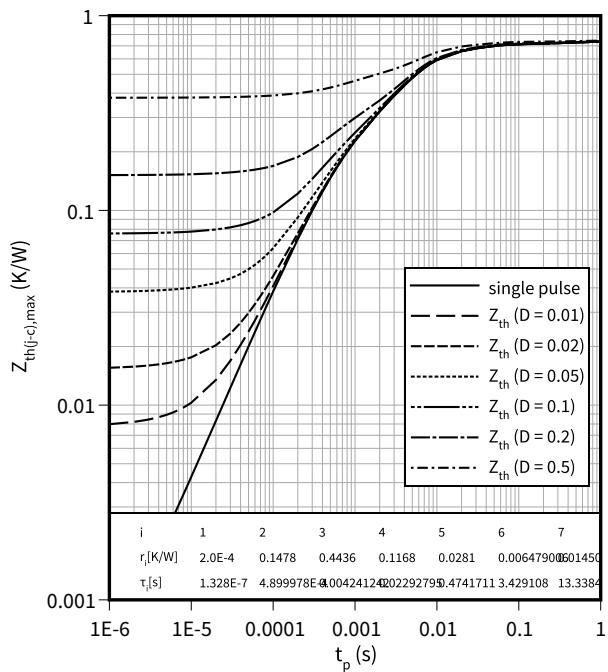

## 5 Package outlines

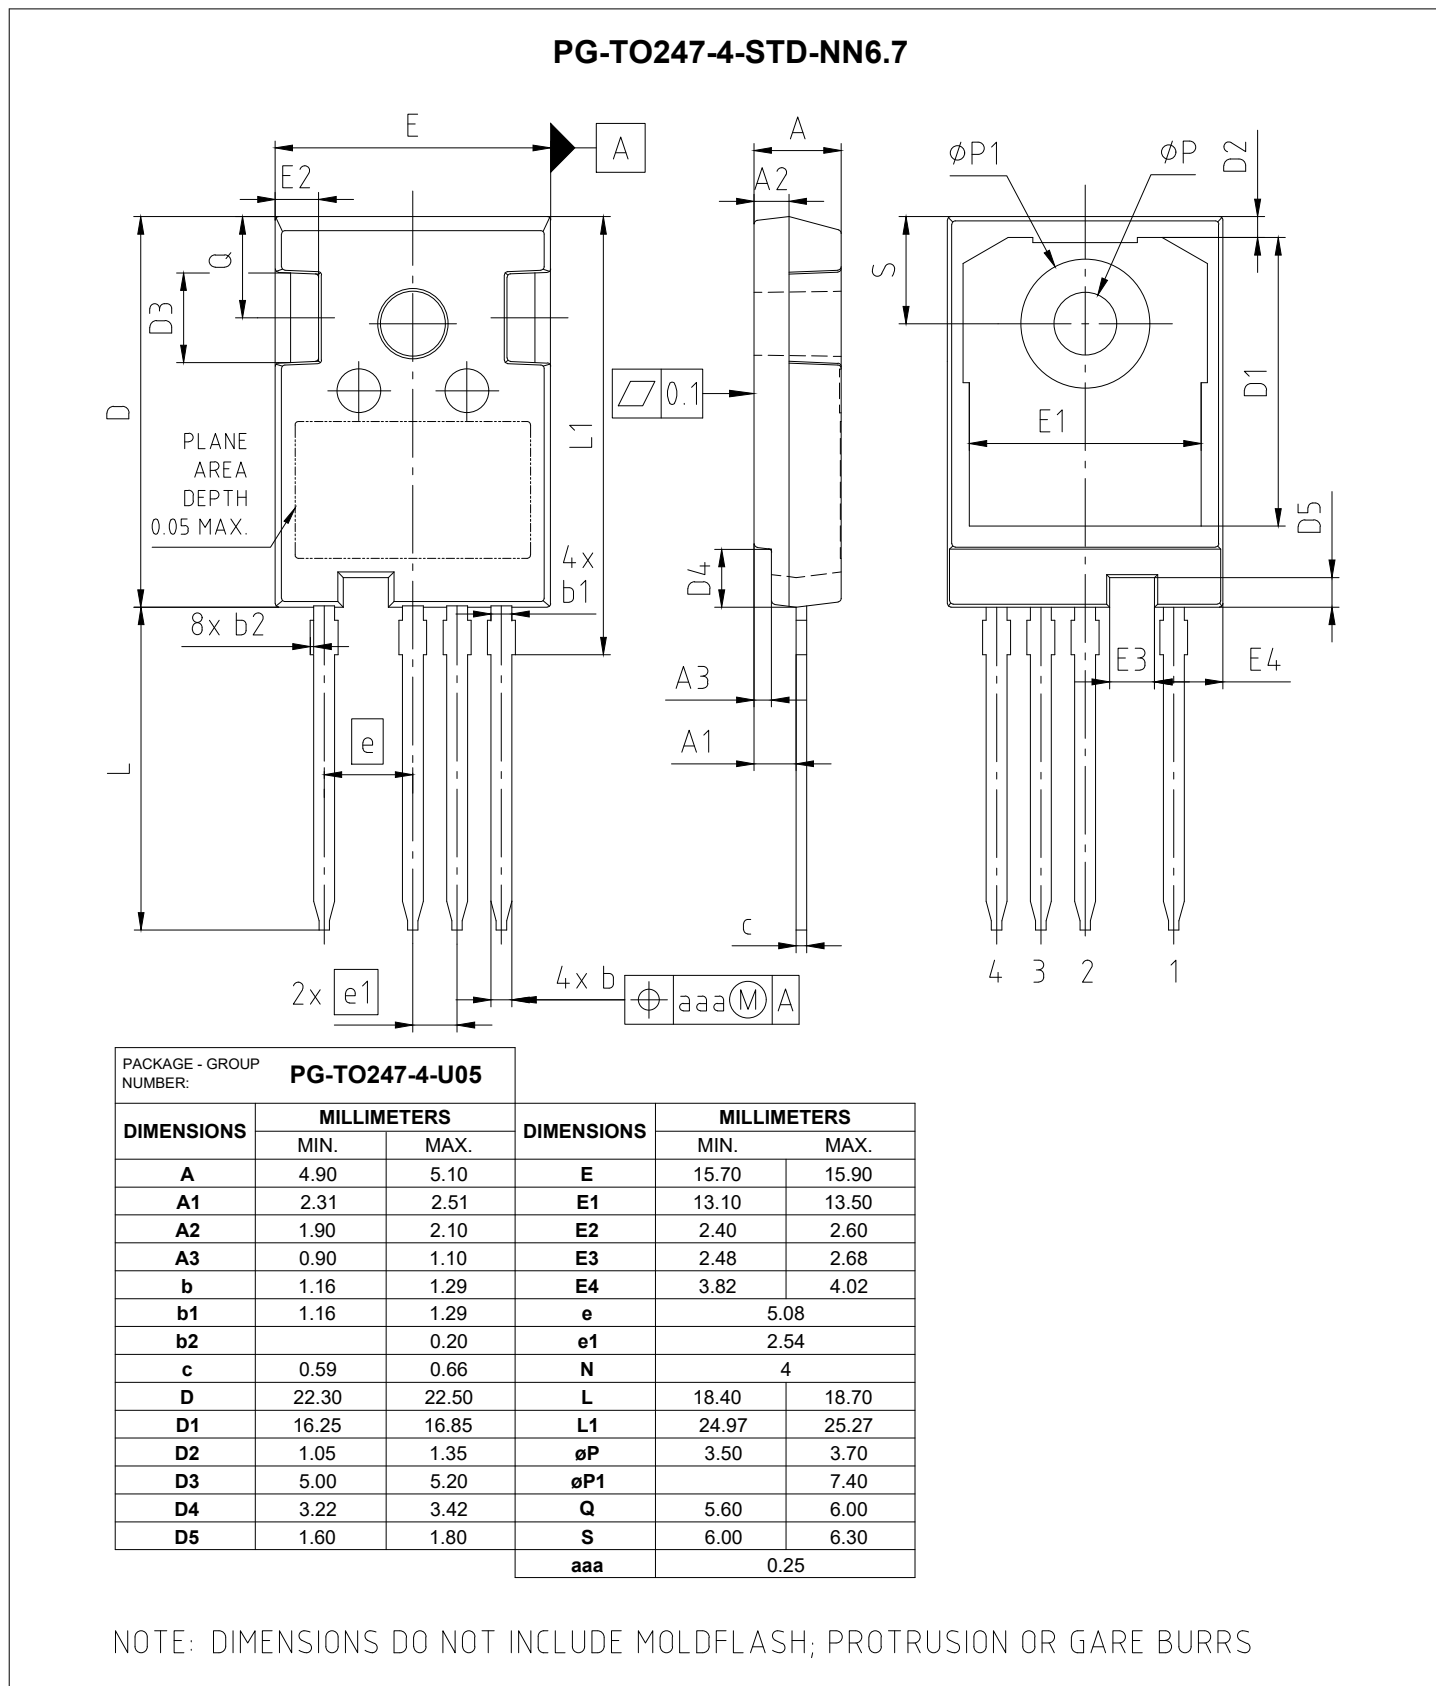


Figure 1

## 6 Testing conditions

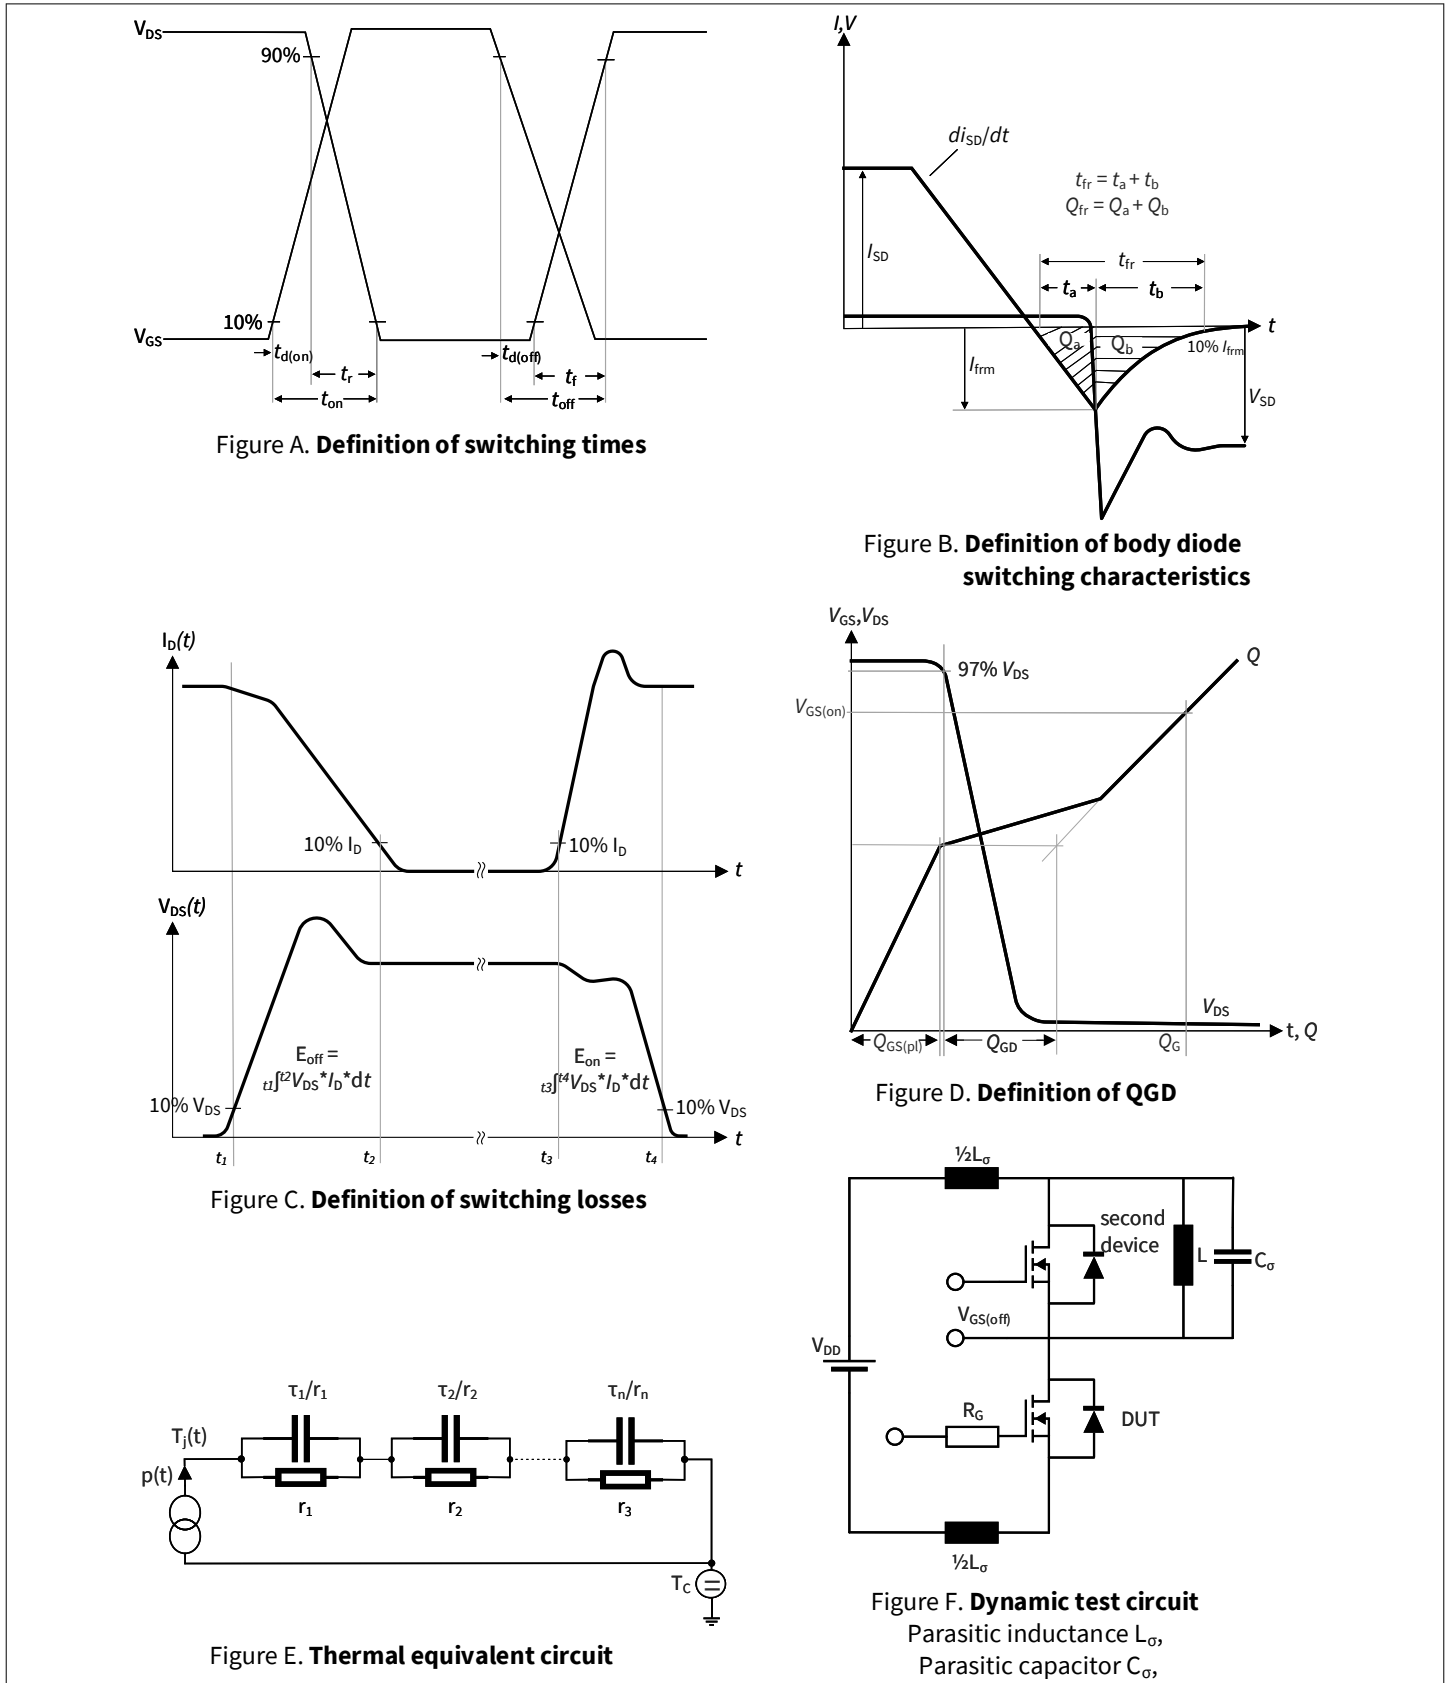


Figure 2

## Revision history

Document revision	Date of release	Description of changes
0.10	2022-04-19	Target datasheet
0.20	2023-08-03	Preliminary datasheet
1.00	2023-11-30	Final datasheet

## Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2023-11-30**

**Published by**

**Infineon Technologies AG**

**81726 Munich, Germany**

**© 2023 Infineon Technologies AG**

**All Rights Reserved.**

**Do you have a question about any aspect of this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference**

**IFX-ABE586-003**

## Important notice

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffungsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

## Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.