Specifications



# Head for pilot light, Harmony XB5, plastic, blue, 22mm, universal LED, grooved lens

ZB5AV063S

Product availability : Stock - Normally stocked in distribution facility

Main	
Range of Product	Harmony XB5
Product or Component Type	Head for pilot light
Product Compatibility	Universal LED
Device short name	ZB5
Bezel material	Dark grey plastic
Mounting diameter	0.87 in (22 mm)
Head type	Standard
Sale per indivisible quantity	1
Shape of signaling unit head	Round
Cap/Operator or lens colour	Blue
Operator additional information	With grooved lens
Complementary	
CAD overall width	1.14 in (29 mm)
CAD overall height	1.14 in (29 mm)
CAD overall depth	1.22 in (31 mm)
Net Weight	0.04 lb(US) (0.017 kg)
Station name	XALD 15 cut-outs XALK 25 cut-outs
Electrical composition code	P1 front mounting integral LED P2 front mounting integral LED and transformer PF1 front mounting integral LED PR1 rear mounting integral LED
Device presentation	Basic element
Environment	
Protective treatment	TH
Ambient Air Temperature for Storage	-40158 °F (-4070 °C)
Ambient Air Temperature for	-40158 °F (-4070 °C)

Operation

Overvoltage category



Class II IEC 60536

IP degree of protection	IP66 IEC 60529			
0 1	IP67 IEC 60529			
	IP69 IEC 60529			
	IP69K ISO 20653			
NEMA degree of protection	NEMA 13			
	NEMA 4X			
Resistance to high pressure washer	1015.26 psi (7000000 Pa) 131 °F (55 °C) 0.1 m			
IK degree of protection	IK05 IEC 50102			
Standards	UL 508			
	EN/IEC 60947-5-1			
	CSA C22.2 No 14			
	EN/IEC 60947-1			
	EN/IEC 60947-5-4			
	JIS C8201-5-1			
	EN/IEC 60947-5-5			
	JIS C8201-1			
Environmental characteristic	High ambient lighting environment			
Vibration resistance	5 gn 2500 Hz)IEC 60068-2-6			
Shock resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27			

## Ordering and shipping details

Category	22467-PUSHBUTTONS,22MM(PLASTIC) NEW		
Discount Schedule	CS2		
GTIN	3389110291032		
Returnability	No		
Country of origin	FR		

## **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.46 in (8.8 cm)
Package 1 Width	1.34 in (3.4 cm)
Package 1 Length	2.13 in (5.4 cm)
Package 1 Weight	0.54 oz (15.25 g)

## Offer Sustainability

mium product eclaration e compliance (Product out of EU RoHS legal scope) Declaration
e compliance (Product out of EU RoHS legal scope)
IS declaration
nvironmental Profile
r

#### **Contractual warranty**


Warranty

18 months

ZB5AV063S

**Dimensions Drawings** 

#### Dimensions




## **ZB5AV063S**

Mounting and Clearance

#### Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

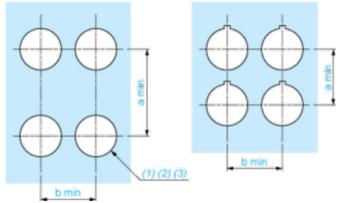


(1) Diameter on finished panel or support

(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.

(3)  $\emptyset$ 22.5 mm recommended ( $\emptyset$ 22.3  $_{0}^{+0.4}$ ) /  $\emptyset$ 0.89 in. recommended ( $\emptyset$ 0.88 in.  $_{0}^{+0.016}$ )

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18

#### **Detail of Lug Recess**



(1) Diameter on finished panel or support

(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.

(3) Ø22.5 mm recommended (Ø22.3  $_{0}^{+0.4}$ ) / Ø0.89 in. recommended (Ø0.88 in.  $_{0}^{+0.016}$ )


Life Is On Schneider

## **ZB5AV063S**

Mounting and Clearance

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


#### Panel Cut-outs (Viewed from Installer's Side)

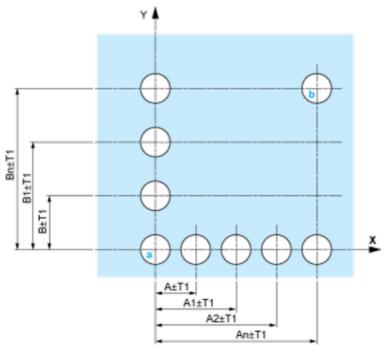

A: 30 mm min. / 1.18 in. min.


**B:** 40 mm min. / 1.57 in. min.

#### Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

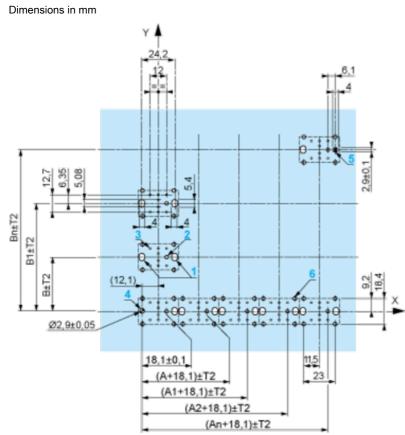

**A:** 30 mm min. **B:** 40 mm min.

Dimensions in in.

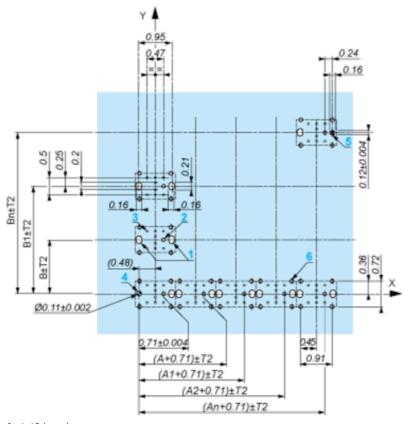



B: 1.57 in. min.


#### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

#### **Installation Precautions**

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2°30' (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
  - $\circ~$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - $^{\circ}$  with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

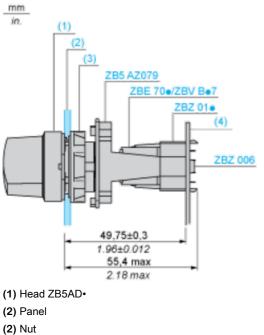

(4) Printed circuit board

#### Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ01+.

## ZB5AV063S

Technical Description

Electrical Composition Corresponding to Codes P1, P3, PF1, PR1 and PF2

Light block

Technical Description

Electrical Composition Corresponding to Codes M6 and P2



ZB5AV063S

**Technical Description** 

#### Legend

Single contact



#### Double contact



#### Light block



Possible location

Recommended replacement(s)

