



WSE9LC-3P3436A00 W9

SMALL PHOTOELECTRIC SENSORS





Ordering information

Туре	Part no.
WSE9LC-3P3436A00	1098211

Other models and accessories → www.sick.com/W9

Illustration may differ



Detailed technical data

Features

Functional principle	Through-beam photoelectric sensor
Dimensions (W x H x D)	12.2 mm x 52.2 mm x 23.6 mm
Housing design (light emission)	Rectangular
Mounting hole	M3
Sensing range max.	0 m 60 m
Sensing range	0 m 50 m
Type of light	Visible red light
Light source	Laser 1)
Light spot size (distance)	Ø 1 mm (500 mm)
Wave length	650 nm
Laser class	1 (IEC 60825-1 / CDRH 21 CFR 1040.10 & 1040.11)
Adjustment	IO-Link Single teach-in button
Pin 2 configuration	External input, Teach-in input, Detection output, logic output, Device contamination alarm output
Special applications	Detecting small objects

 $^{^{1)}}$ Average service life: 50,000 h at $\rm T_U$ = +25 °C.

Mechanics/electronics

Supply voltage U _B	10 V DC 30 V DC ¹⁾
Ripple	< 5 V _{pp} ²⁾
Current consumption	30 mA ³⁾
Switching output	PNP ^{4) 5)}
Output function	Complementary
Switching mode	Light/dark switching ⁴⁾
Output current I _{max.}	≤ 100 mA
Response time	≤ 0.5 ms ⁶⁾
Response time Q/ on Pin 2	300 μs 450 μs ^{6) 7)}
Switching frequency	1,000 Hz ⁸⁾
Switching frequency Q / to pin 2	≤ 1,000 Hz ⁹⁾
Connection type	Cable with M12 male connector, 4-pin, 120 mm
Circuit protection	A ¹⁰⁾ B ¹¹⁾ C ¹²⁾
Protection class	III
Weight	13 g
Housing material	Plastic, VISTAL®
Optics material	Plastic, PMMA
Enclosure rating	IP66 IP67 IP69K
Ambient operating temperature	-10 °C +50 °C
Ambient operating temperature extended	-30 °C +55 °C ^{13) 14)}
Ambient temperature, storage	-30 °C +70 °C
UL File No.	NRKH.E181493
Repeatability Q/ on Pin 2:	150 μs ⁷⁾

 $^{^{1)}}$ Limit values when operated in short-circuit protected network: max. 8 A.

Safety-related parameters

MTTF _D	405 years
-------------------	-----------

 $^{^{2)}\,\}mbox{May}$ not exceed or fall below $\mbox{U}_{\mbox{\scriptsize V}}$ tolerances.

³⁾ Without load.

⁴⁾ Q = light switching.

⁵⁾ Pin 4: this switching output must not be connected to any other output.

⁶⁾ Signal transit time with resistive load.

 $^{^{7)}}$ Valid for Q \backslash on Pin2, if configured with software.

 $^{^{8)}}$ With light/dark ratio 1:1.

 $^{^{9)}}$ With light / dark ratio 1:1, valid for Q \backslash on Pin2, if configured with software.

 $^{^{10)}}$ A = V_S connections reverse-polarity protected.

 $^{^{11)}}$ B = inputs and output reverse-polarity protected.

¹²⁾ C = interference suppression.

 $^{^{13)}}$ As of T_a = 50 °C, a max. supply voltage V_{max.} = 24 V and a max. load current I_{max.} = 50 mA is permitted.

 $^{^{14)}}$ Operation below Tu $^{-10}$ °C is possible if the sensor is already switched on at Tu $^{>}$ $^{-10}$ °C, then cools down, and the supply voltage is subsequently not switched off. Switching on below Tu $^{-10}$ °C is not permissible.

WSE9LC-3P3436A00 | W9

SMALL PHOTOELECTRIC SENSORS

DC _{avg}	0 %
T _M (mission time)	10 years

Communication interface

Communication interface	IO-Link V1.1
Communication Interface detail	COM2 (38,4 kBaud)
Cycle time	2.3 ms
Process data length	16 Bit
Process data structure	Bit 0 = switching signal Q_{L1} Bit 1 = switching signal Q_{L2} Bit 2 15 = empty
VendorID	26
DeviceID HEX	0x80011C
DeviceID DEC	8388892

Smart Task

Smart Task name		Base logics
Logic function		Direct AND OR WINDOW Hysteresis
Timer function		Deactivated On delay Off delay ON and OFF delay Impulse (one shot)
Inverter		Yes
Switching frequency		SIO Direct: 1000 Hz $^{1)}$ SIO Logic: 1000 Hz $^{2)}$ IOL: 900 Hz $^{3)}$
Response time		SIO Direct: 300 μ s 450 μ s $^{1)}$ SIO Logic: 500 μ s 600 μ s $^{2)}$ IOL: 500 μ s 900 μ s $^{3)}$
Repeatability		SIO Direct: 150 μ s ¹⁾ SIO Logic: 150 μ s ²⁾ IOL: 400 μ s ³⁾
Switching signal		
	Switching signal Q _{L1}	Output type (dependant on the adjusted threshold)
	Switching signal Q _{L2}	Output type (dependant on the adjusted threshold)

¹⁾ SIO Direct: sensor operation in standard I/O mode without IO-Link communication and without using internal sensor logic or time parameters (set to "direct"/"deactivated").

Diagnosis

Device status	Yes
Function reserve	Yes

²⁾ SIO Logic: Sensor operation in standard I/O mode without IO-Link communication. Sensor-internal logic or timing parameters plus Automation Functions used.


³⁾ IOL: Sensor operation with full IO-Link communication and usage of logic, timing and Automation Function parameters.

Classifications

ECLASS 5.0	27270901
ECLASS 5.1.4	27270901
ECLASS 6.0	27270901
ECLASS 6.2	27270901
ECLASS 7.0	27270901
ECLASS 8.0	27270901
ECLASS 8.1	27270901
ECLASS 9.0	27270901
ECLASS 10.0	27270901
ECLASS 11.0	27270901
ECLASS 12.0	27270901
ETIM 5.0	EC002716
ETIM 6.0	EC002716
ETIM 7.0	EC002716
ETIM 8.0	EC002716
UNSPSC 16.0901	39121528

Adjustments


Single teach-in button



- ③ LED indicator yellow: Status of received light beam
- ④ LED indicator green: power on
- ® Teach-in button

Connection diagram


Cd-376




① Receiver

② Sender

Cd-365




Characteristic curve



Light spot size

Radius in mm (inch)



Dimensions in mm (inch)


Sensing range	Vertical	Horizontal
0.5 m	< 1.0	< 1.0
(1.64 feet)	(0.04)	(0.04)
1 m	1.5	1.2
(3.28 feet)	(0.06)	(0.05)
5 m	15	11
(16.40 feet)	(0.59)	(0.43)
10 m	45	28
(32.81 feet)	(1.77)	(1.10)
60 m	336	200
(196.85 feet)	(13.23)	(7.87)

Vertical
Horizontal

Light spot size (detailed view)


Detailed view close range

Radius in mm (inch)




Vertical
Horizontal

Sensing range diagram



Dimensional drawing (Dimensions in mm (inch))

WSE9L-3

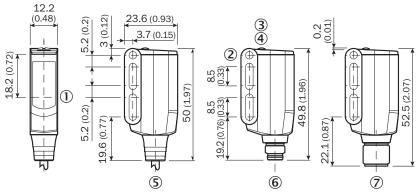

- ① Sender and receiver optical axis center
- ② Mounting hole M3 (Ø 3.1 mm)
- ③ LED indicator yellow: Status of received light beam
- ④ LED indicator green: power on
- ⑤ Connecting cable or connecting cable with connector
- Male connector M8, 4-pin
- Male connector M12, 4-pin

Recommended accessories

Other models and accessories → www.sick.com/W9

	Brief description	Туре	Part no.
Mounting brackets and plates			
2	Mounting bracket, steel, zinc coated, mounting hardware included	BEF-WN-W9-2	2022855
Plug connectors and cables			
	Head A: female connector, M12, 4-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m	YF2A14- 050VB3XLEAX	2096235
	Head A: male connector, M12, 4-pin, straight Cable: unshielded	STE-1204-G	6009932

Recommended services

Additional services → www.sick.com/W9

	Туре	Part no.
Function Block Factory		
 Description: The Function Block Factory supports common programmable logic controllers (PLCs) from various manufacturers, such as Siemens, Beckhoff, Rockwell Automation and B&R. More information on the FBF can be found here. Note: You can configure your function block at Function Block Factory. As a login please use your SICK ID. 	Function Block Factory	On request

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com

