



RA SMA Male to RA MMCX Plug Cable Tinned Aluminum RG405 Type .086 Coax

The RA SMA male to RA MMCX plug cable using Tinned Aluminum RG405 type .086 coax, part number FMCA3037, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to MMCX cable assembly has a male to plug gender configuration with 50 ohm semi-rigid FM-SR086ALTN-STR coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. The FMCA3037 SMA male to MMCX plug cable assembly operates to 6 GHz. The right angle SMA and right angle MMCX interfaces on the FM-SR086ALTN-STR cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Ту	р Мах	Units
Frequency Range	DC		6	GHz
VSWR			1.5:1	

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2.5	6			GHz
Insertion Loss (Typ.)	0.23	0.32	0.55			dB/ft
	0.75	1.05	1.8			dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.027 lbs [12.25 g]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields

Outer Conductor Material and Plating

One Time Minimum Bend Radius

FM-SR086ALTN-STR 50 Ohms Solid Copper Clad Steel, Silver PTFE 1

0.05 in [1.27 mm]

Tinned Aluminum



Configuration:

- SMA Male Right Angle
- MMCX Plug Right Angle
- FM-SR086ALTN-STR

Features:

Max Frequency 6 GHz

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Connectors

Description	Connector 1	Connector 2	
Туре	SMA Male	MMCX Plug	
Specification	MIL-STD-348A		
Impedance	50 Ohms	50 Ohms	
Contact Material & Plating	Brass, Gold	Phosphor Bronze, Gold over Nic	
Contact Plating Spec.	50 μin minimum		
Dielectric Type	PTFE	PTFE	
Body Material & Plating	Stainless Steel, Gold	Brass, Gold over Nickel	
Body Plating Spec.	30 μin minimum		
Coupling Nut Material & Pla	ting Brass, Nickel		
Coupling Nut Plating Spec.	100 μin minimum		
Hex Size	5/16 inch		
Torque	3 in-lbs 0.34 Nm		

Mechanical Specification Notes:


Maximum length using the straight semi rigid coax is 5ft. For lengths greater than 5ft, please contact us

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

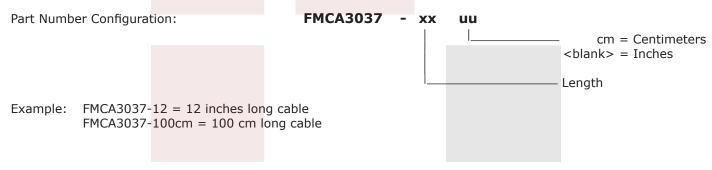

RA SMA Male to RA MMCX Plug Cable Tinned Aluminum RG405 Type .086 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: RA SMA Male to RA MMCX Plug Cable Tinned Aluminum RG405 Type .086 Coax FMCA3037

URL: https://www.fairviewmicrowave.com/ra-sma-male-to-ra-mmcx-plug-cable-tinned-aluminum-rg405-type-.086-coax-fmca3037-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





