

RA N Male to N Female 4 Hole Flange Cable Tinned Copper RG405 Type .086 Coax

The RA type N male to type N female 4 hole flange cable using Tinned Copper RG405 type .086 coax, part number FMCA3062, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a male to female gender configuration with 50 ohm semi-rigid FM-SR086CUTN-STR coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. The FMCA3062 type N male to type N female cable assembly operates to 11 GHz. The right angle type N interface on the FM-SR086CUTN-STR cable allows for easier connections in tight spaces. Our RF cable assembly with type N 4 hole flange interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Min | Typ | Max | Units |
|-----------------|-----|-----|-------|-------|
| Frequency Range | DC | | 11 | GHz |
| VSWR | | | 1.5:1 | |

Performance by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|----|-------|
| Frequency | 1 | 2.5 | 5 | 11 | | GHz |
| Insertion Loss (Typ.) | 0.22 | 0.31 | 0.47 | 0.84 | | dB/ft |
| | 0.72 | 1.02 | 1.54 | 2.76 | | dB/m |

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Weight 0.184 lbs [83.46 g]

Cable

Cable Type FM-SR086CUTN-STR
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Shield Layer 1 Tinned Copper



Configuration:

- N Male Right Angle
- N Female 4 Hole Flange
- FM-SR086CUTN-STR

Features:

- Max Frequency 11 GHz

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

One Time Minimum Bend Radius 0.05 in [1.27 mm]

Connectors

| Description | Connector 1 | Connector 2 |
|---------------------------------|---------------|---------------|
| Type | N Male | N Female |
| Mount Method | | 4 Hole Flange |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material & Plating | Brass, Gold | |
| Dielectric Type | PTFE | |
| Body Material & Plating | Brass, Nickel | Brass, Nickel |
| Coupling Nut Material & Plating | Brass, Nickel | |

Mechanical Specification Notes:

Maximum length using the straight semi rigid coax is 5ft. For lengths greater than 5ft, please contact us

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

FMCA3062 - xx uu

cm = Centimeters
 <blank> = Inches

Length

Example: FMCA3062-12 = 12 inches long cable
 FMCA3062-100cm = 100 cm long cable


RA N Male to N Female 4 Hole Flange Cable Tinned Copper RG405 Type .086 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [RA N Male to N Female 4 Hole Flange Cable Tinned Copper RG405 Type .086 Coax FMCA3062](#)

URL: <https://www.fairviewmicrowave.com/ra-n-male-to-n-female-4-hole-flange-cable-tinned-copper-rg405-type-.086-coax-fmca3062-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 08/03/22 | AGANWANI |

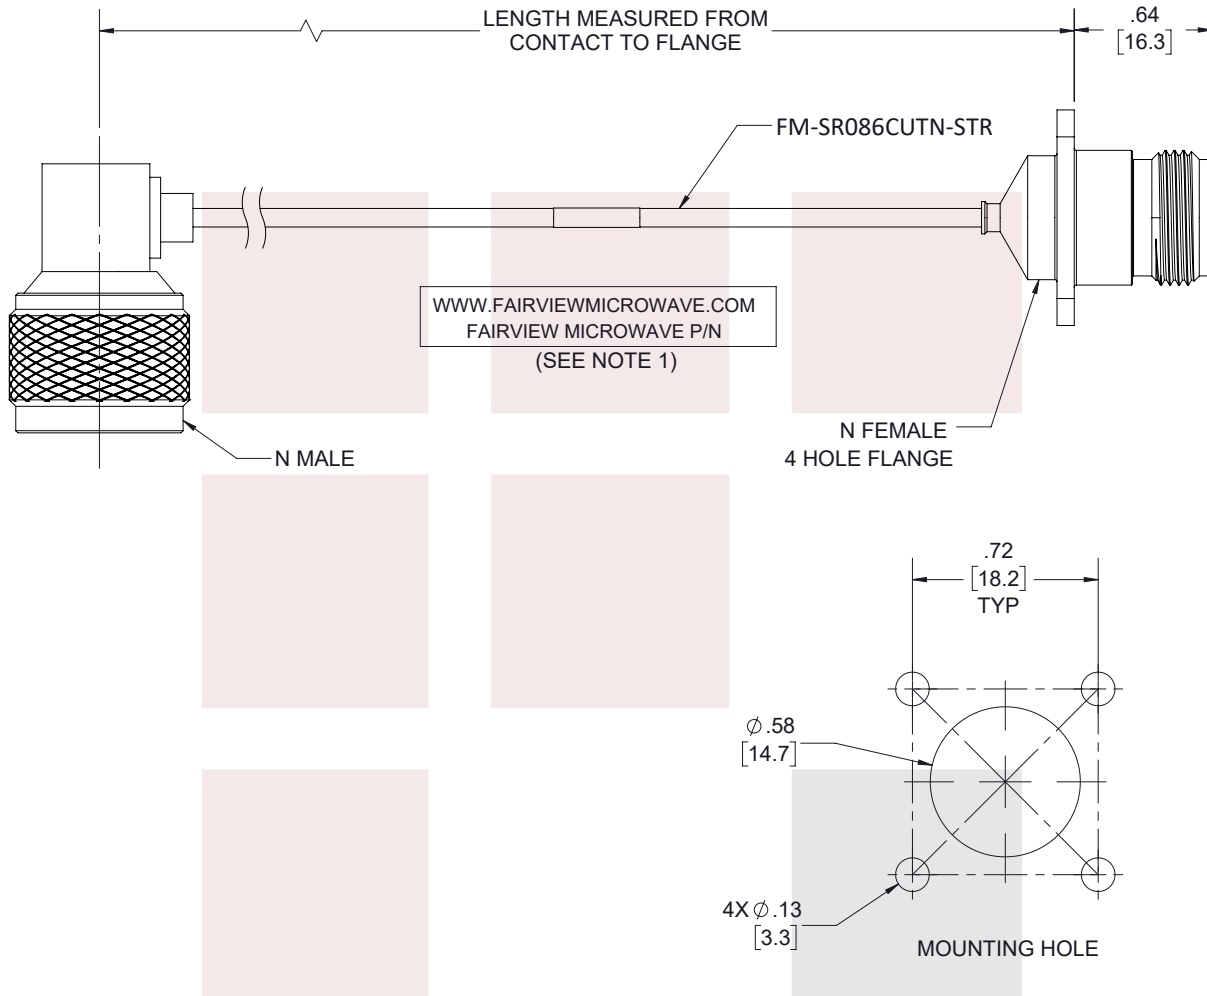

NOTES:

1. CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END
6.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

TITLE

RA N Male to N Female 4 Hole Flange Cable Tinned
Copper RG405 Type .086 Coax

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5.08] FRACTIONS
.XX = ±.02 [.51] ± 1/32
.XXX = ±.005 [.13] ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] / -0
12 [305] < L ≤ 60 [1524] = +2 [51] / -0
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
300 [7620] < L = +5%L / -0

THIRD-ANGLE PROJECTION



THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
FAIRVIEW MICROWAVE CORPORATION.
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE

N/A

| SIZE | CAGE CODE | DRAWN BY | ITEM NO. | REV |
|------|-----------|------------|----------|-----|
| A | 3FKR5 | VTHANGARAJ | FMCA3062 | A |

T-Rev.D