
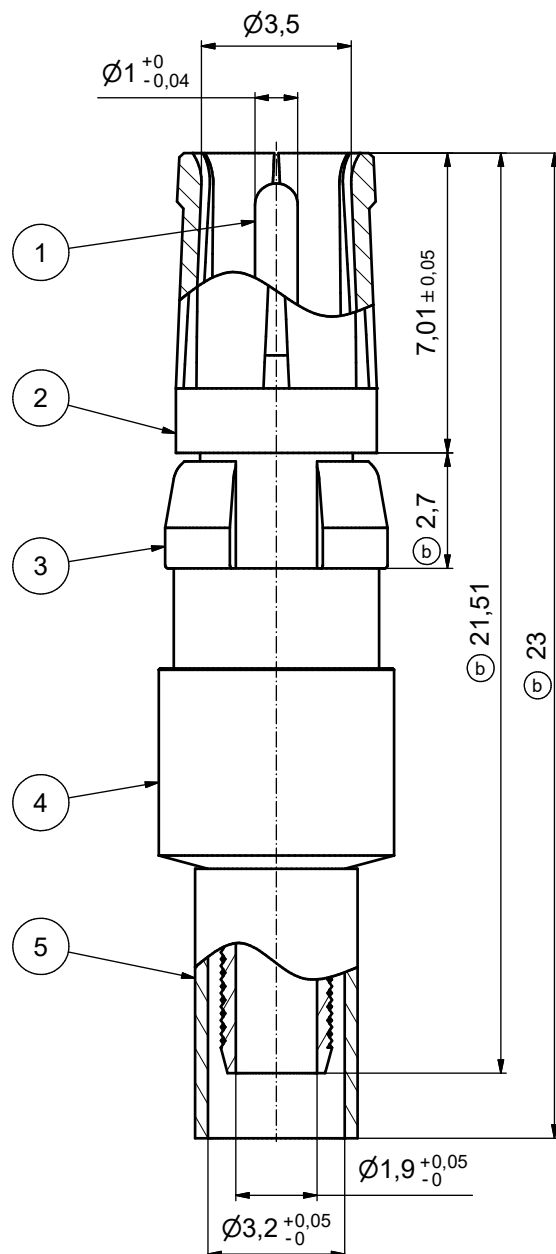
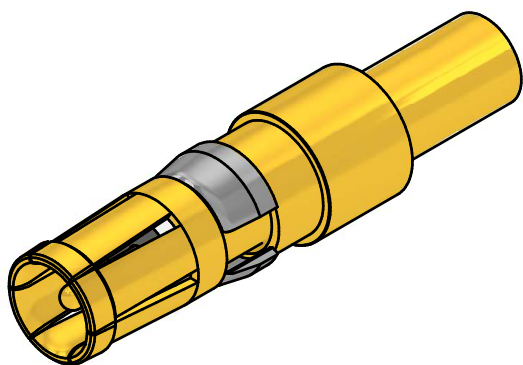


(b) STRIPPING DIMENSIONS

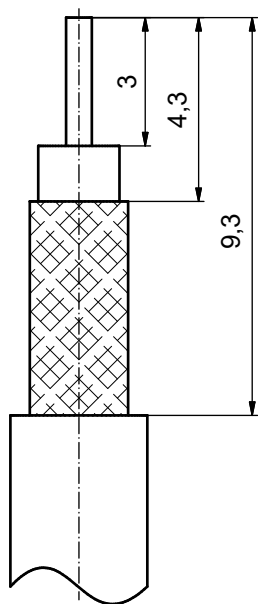

(b) ASSEMBLY TOOLING:

1. CENTER CONTACT:
USE CRIMP TOOL: 360X10329X
WITH TOOL INSERT: 360X11049X
SELECTOR SETTING: 3 (FOR AWG 30 CENTER CONDUCTOR OF CABLE)
2. CRIMP FERRULE:
USE CRIMP TOOL: 360X10519X
WITH TOOL INSERT: 360X11019X
INSERT CAVITY B: HEX 3.25/.128

(b)

Part no.	Finish Pos.1	Finish Pos.2	Finish Pos.3	Finish Pos. 4/5
132J31019X	min. 50µin HARD GOLD over min. 50µin NICKEL	min. 30µin HARD GOLD over min. 50µin NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL
132A31019X	GOLD FLASH over NICKEL	GOLD FLASH over NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance ISO 2768-c	dim. in mm
7 x b	A3774	10.01.11	HS	date	name
a	Original			drawn 02.08.2002	Schmidt
rev.	description	date	name	appd. 02.08.2002	Mickenbecker
				norm	
				d-old	

CONEC

scale:	8:1
material:	COPPER ALLOY (Pos. 1 - 5)
title:	COAXIAL CONTACT SOCKET 75 OHM inner + outer conductor for crimp termination for cable RG 179BU, 187AU
dwg no:	13K2A040A
part no:	see table
DIN-A3	sh: 1