

RoHS Compliant

Description



The resistors are constructed in a high grade ceramic body (aluminium oxide). Internal metal electrodes are added at each end and connected by a resistive layer that is applied to the top surface of the substrate. The composition of the resistive layer is adjusted to give the approximate resistance required and the value is trimmed to nominated value within tolerance which controlled by laser trimming of this resistive layer.

The resistive layer is covered with a protective coat. Finally, the two external end terminations are added. For environmental soldering issue, the outer layer of these end terminations is a Lead-free solder.


Features

- SMD metal film resistor
- High performance of TCR: 25 ppm/K
- Low current noise
- ±0.05% is upon the customer request

Application

- Medical equipment
- · Measuring instrument
- · Communication device
- · Computer and Printer

Construction of Chip-R

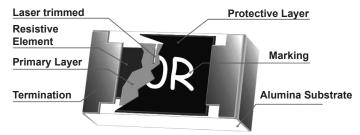

Quick Reference Data

Item	General Specification					
Series No.	WF12U	WF08U	WF06U	WF04U		
Size code	1206(3216)	0805(2012)	0603(1608)	0402(1005)		
Resistance Range		±1%, ±0.5%, ±0.25%, ±0.1%, ±0.05%				
Resistance Tolerance	4.7Ω ~ 1MΩ (E24 +E192)	4.7Ω ~ 1MΩ (E24 +E192)	4.7Ω ~ 680kΩ (E24 +E192)	4.7Ω ~ 150kΩ (E24 +E192)		
TCR (ppm/°C)		+25 ~ -2	5ppm/°C			
Max. dissipation at Tamb=70°C	1/8W	1/10W	1/16W	1/16W		
Max. Operation Voltage (DC or RMS)	200V	100V	50V	50V		
Max. Overload Voltage (DC or RMS)	400V	200V	100V	100V		
Operation Temperature	-55°C ~ +155°C					


Note:

- 1. This is the maximum voltage that may be continuously supplied to the resistor element, see "IEC publication 60115-8"
- 2. Max. Operation Voltage : So called RCWV (Rated Continuous Working Voltage) is determined by RCWV = √Rated Power × Resistance Value or Max. RCWV listed above, whichever is lower.





Mechanical Data



Туре	WF12U	WF08U	WF06U	WF04U
L	3.1 ±0.1	2 ±0.1	1.55 ±0.1	1 ±0.05
W	1.6 ±0.1	1.25 ±0.1	0.8 ±0.1	0.5 ±0.05
Α	0.45 ±0.2	0.25 ±0.2	0.25 ±0.15	0.2 ±0.1
В	0.45 ±0.2	0.4 ±0.2	0.3 ±0.15	0.25 ±0.1
t	0.6 ±0.15	0.5 ±0.15	0.45 ±0.15	0.35 ±0.05

Dimensions: Millimetres

Marking

3-digits marking for 0603 size

WFxxU has same marking rule as WRxx ±1%.

3-digits marking (±1% : 0603)

Nominal resistance	Description	
1. E-24 series	1. E-24 series As 0603 WR06X ±5%.	
2. E-96 series	The 1st two digit codes are referring to the CODE on the table, the 3rd code is the index of resistance value : $Y=10^{-2},\ X=10^{-1},\ A=10^{\circ},\ B=10^{1},\ C=10^{2},\ D=10^{3},\ E=10^{4},\ F=10^{5}$ EX : $17.8\Omega=25X,\ 178\Omega=25A,\ 1K78=25B$ $17K8=25C,\ 178K=25D,\ 1M78=25E$	
3. Remark	There is no marking for the items are not under E-24 and E-96 series	

CODE	R_value	CODE	R_value	CODE	R_Value	CODE	R_val- ue								
01	100	13	133	25	178	37	237	49	316	61	422	73	562	85	750
02	102	14	137	26	182	38	243	50	324	62	432	74	576	86	768
03	105	15	140	27	187	39	249	51	332	63	442	75	590	87	787
04	107	16	143	28	191	40	255	52	340	64	453	76	604	88	806
05	110	17	147	29	196	41	261	53	348	65	464	77	619	89	825
06	113	18	150	30	200	42	267	54	357	66	475	78	634	90	845
07	115	19	154	31	205	43	274	55	365	67	487	79	649	91	866
08	118	20	158	32	210	44	280	56	374	68	499	80	665	92	887
09	121	21	162	33	215	45	287	57	383	69	511	81	681	93	909
10	124	22	165	34	221	46	294	58	392	70	523	82	698	94	931
11	127	23	169	35	226	47	301	59	402	71	536	83	715	95	953
12	130	24	174	36	232	48	309	60	412	72	549	84	732	96	976

4-digits marking for 1206, 0805 size

For E24/E96 series, each resistor is marked with a four digits code on the protective coating to designate the nominal resistance value. For non E24/E96 series, no marking is applied!





Example

Resistance	10Ω	12Ω	100Ω	6800Ω	47000Ω
4-digits marking	10R0	12R0	1000	6801	4702

No marking code for 0402 size


Functional Description

Product characterization

Standard values of nominal resistance are taken from the E192 & E24 series for resistors with a tolerance of $\pm 1\%$, $\pm 0.5\%$, $\pm 0.25\%$, $\pm 0.1\%$, $\pm 0.05\%$. The values of the E24/E192 series are in accordance with "IEC publication 60063".

Derating

The power that the resistor can dissipate depends on the operating temperature.



Max. Dissipation in percentage of rated power As a function of the ambient temperature

Mounting

Due to their rectangular shapes and small tolerances, Surface Mountable Resistors are suitable for handling by automatic placement systems.

Chip placement can be on ceramic substrates and printed-circuit boards (PCBs).


Electrical connection to the circuit is by individual soldering condition.

The end terminations guarantee a reliable contact.

Soldering Condition

The robust construction of chip resistors allows them to be completely immersed in a solder bath of 260°C for 10 seconds. Therefore, it is possible to mount Surface Mount Resistors on one side of a PCB and other discrete components on the reverse (mixed PCBs).

Surface Mount Resistors are tested for solderability at 235°C during 2 seconds within lead-free solder bath. The test condition for no leaching is 260°C for 30 seconds. Typical examples of soldering processes that provide reliable joints without any damage are given in below figure.



Infrared soldering profile for Chip Resistors





Catalogue Numbers

The resistors have a catalogue number starting with

WF06	U	XXXX	D	Т	L
Size code WF12: 1206 WF08: 0805 WF06: 0603 WF04: 0402	Type code U: TCR 25ppm	Resistance code E192+E24: 3 significant digits followed by No. of zeros e.g.: $102\Omega = 1020$ $37.4k\Omega = 3742$ $220\Omega = 2200$	Tolerance F:±1% D:±0.5% C:±0.25% B:±0.1% A:±0.05%	Packaging code T: Reeled	Termination code L = Sn base (lead free)

Reeled tape packaging: 8mm width paper taping. 5,000pcs/reel for WF12U, WF08U, WF06U;

Test And Requirements

Basic specification : JIS C 5201-1 : 1998

Test	Procedure	Requirement
DC resistance	DC resistance values measured at the test voltages specified below : $<10\Omega@0.1V, <100\Omega@0.3V, <1k\Omega@1.0V, <10k\Omega@3V, <100k\Omega@10V, <1M\Omega@25V, <10M\Omega@30V$	Within the specified tolerance
Natural resistance change per change in degree Centigrade. R2 - R1 R1(t2 - t1) × 10 ⁶ (ppm/°C) R1 : Resistance at reference temperature R2 : Resistance at test temperature t1 : 20°C +5°C -1°C. t2 : 125°C +5°C -1°C.		Refer to "Quick Reference Data"
Short time overload (S.T.O.L)	Permanent resistance change after a 5 second application of a voltage 2.5 times RCWV or the maximum overload voltage specified in the above list, whichever is less.	Δ R/R max. ±(0.2% +0.05Ω)
Resistance to soldering heat (R.S.H)	Un-mounted chips completely immersed for 10±1second in a SAC solder bath at 260°C ±5°C.	No visible damage $\Delta R/R$ max. $\pm (0.1\% + 0.05\Omega)$
Solderability	Un-mounted chips completely immersed for 2 ±0.5 second in a SAC solder bath at 235°C ±5°C.	Good tinning (>95% covered) No visible damage
Temperature cycling	1. 30 minutes at -55°C ±3°C, 2. 2~3 minutes at 20°C +5°C-1°C, 3. 30 minutes at +155° ±3°C, 4. 2~3 minutes at 20°C +5°C-1°C, Total 5 continuous cycles.	No visible damage $\Delta R/R$ max. $\pm (0.25\% +0.05\Omega)$




^{10,000}pcs/reel for WF04U.



Test	Procedure	Requirement	
Load life (endurance)	1000 +48/-0 hours, loaded with RCWV or Vmax in chamber controller 70±2°C, 1.5 hours on and 0.5 hours off.	Δ R/R max. ±(0.5%+0.05 Ω)	
Load life in Humidity 1000 +48/-0 hours, loaded with RCWV or Vmax in humidity chamber controller at 40°C±2°C and 90~95% relative humidity, 1.5 hours on and 0.5 hours off.		Δ R/R max. ±(0.5%+0.05Ω)	
Bending strength Resistors mounted on a 90mm glass epoxy resin PCB(FR4); bending : 3mm, once for 10 seconds.		Δ R/R max. ±(0.1%+0.05 Ω)	
Adhesion Pressurizing force: 5N, Test time: 10±1sec.		No remarkable damage or removal of the terminations	
Insulation Resistance Apply the maximum overload voltage (DC) for 1 minute.		$R \ge 10G\Omega$	
Dielectric Withstand Voltage Apply the maximum overload voltage (AC) for 1 mi		No breakdown or flashover	

Packaging

Paper Tape specifications

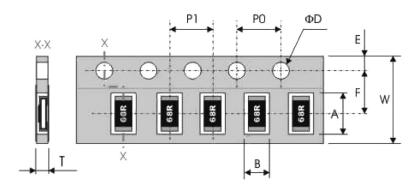

Series No.	Α	В	W	F	E
WF12	3.6 ±0.2	2 ±0.2	8 ±0.3	3.5 ±0.2	1.75 ±0.1
WF08	2.4 ±0.2	1.65 ±0.2	8 ±0.3	3.5 ±0.2	1.75 ±0.1
WF06	1.9 ±0.2	1.1 ±0.2	8 ±0.3	3.5 ±0.2	1.75 ±0.1
WF04	1.2 ±0.1	0.7 ±0.1	8 ±0.3	3.5 ±0.05	1.75 ±0.1


Series No.	P1	P0	ØD	T
WF12	4 ±0.1	4 ±0.1		Max. 1
WF08	4 ±0.1	4 ±0.1	1.5 ^{+0.1}	IVIAX. I
WF06	4 ±0.1	4 ±0.1		0.65 ±0.05
WF04	2 ±0.1	4 ±0.1		0.4 ±0.05

Dimensions : Millimetres





Reel dimensions



Α	В	С	D
Ø178 ±2	Ф60 ±1	13 ±0.2	9 ±0.5

Dimensions: Millimetres

Taping quantity

Chip resistors 5,000 pcs per reel (WF12U, WF08U & WF06U) Chip resistors 10,000 pcs per reel (WF04U)

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

