

Radial Leaded PPTC Resettable Fuse

multicompPRO


**RoHS
Compliant**



Specifications

Lead Material	: Tin Plated Copper
Soldering Characteristic	: MIL-STD-202, Method 208E
Insulating Coating	: Flame Retardant Epoxy
Operating Current	: 900mA to 9A
Maximum Voltage	: 30V
Temperature Range	: -40°C to 85°C
Approval	: UL Approved

Diagram

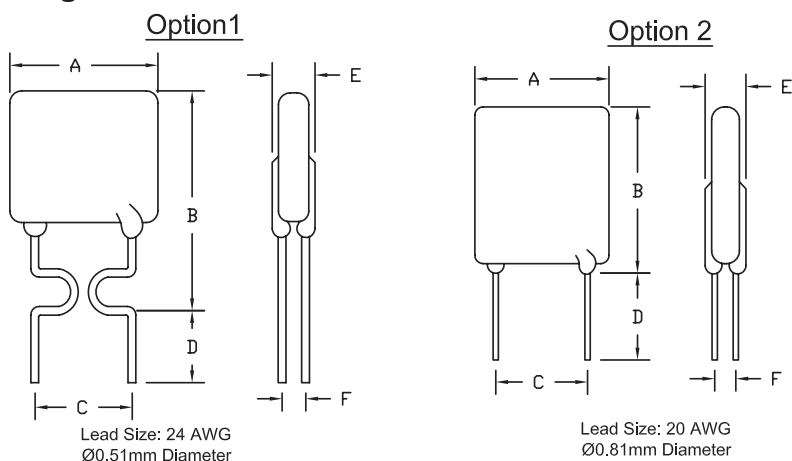

Dimensions

Part Number	A Max.	B Max.	C Typ.	D Max.	E Max.	F Typ.
MC33157	7.4	12.2	5.1	7.6	3	0.9
MC33158	7.4	14.2	5.1	7.6	3	0.9
MC33159	8.9	13.5	5.1	7.6	3	0.9
MC33160	8.9	15.2	5.1	7.6	3	0.9
MC33161	10.2	15.7	5.1	7.6	3	0.9
MC33162	11.4	18.3	5.1	7.6	3	0.9
MC33163	11.4	17.3	5.1	7.6	3	1.2
MC33164	14	20.1	5.1	7.6	3	1.2
MC33165	14	24.9	10.2	7.6	3	1.2
MC33166	16.5	24.9	10.2	7.6	3	1.2
MC33167	21.6	29.2	10.2	7.6	3	1.2
MC33168	24.1	29.7	10.2	7.6	3	1.2



Dimensions : Millimetres

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO

Radial Leaded PPTC Resettable Fuse

multicompPRO

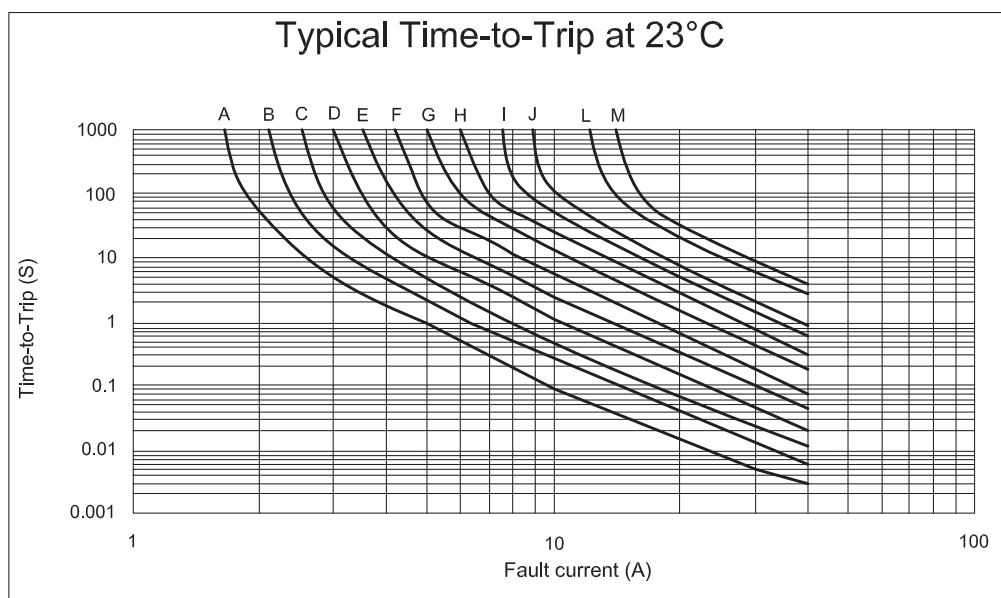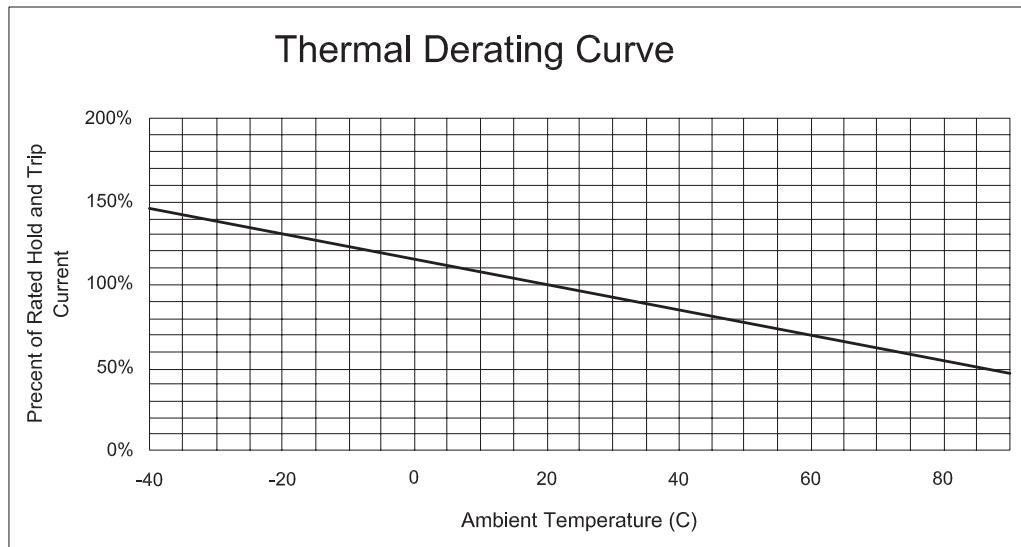

multicompPRO

Radial Leaded PPTC Resettable Fuse

multicompPRO

Part Number Table

Description	Hold Current	Trip Current	Max. Time to Trip	Maximum Current	Rated Voltage	Typical power	Resistance Tolerance		Drawing Option	Time-to-trip Curve Option	Part Number
							RMIN	R1MAX			
	I _H , A	I _T , A	at 5 × I _H	I Max, A	V Max, V DC	P _d , W	Ω	Ω			
Fuse, Resettable, Radial, 0.9A	0.9	1.8	5.9	40	30	0.6	0.07	0.22	Option 1	Option A	MC33157
Fuse, Resettable, Radial, 1.1A	1.1	2.2	6.6	40	30	0.7	0.05	0.17	Option 1	Option B	MC33158
Fuse, Resettable, Radial, 1.35A	1.35	2.7	7.3	40	30	0.8	0.04	0.13	Option 1	Option C	MC33159
Fuse, Resettable, Radial, 1.6A	1.6	3.2	8	40	30	0.9	0.03	0.11	Option 1	Option D	MC33160
Fuse, Resettable, Radial, 1.85A	1.85	3.7	8.7	40	30	1	0.03	0.09	Option 1	Option E	MC33161
Fuse, Resettable, Radial, 2.5A	2.5	5	10.3	40	30	1.2	0.02	0.07	Option 1	Option F	MC33162
Fuse, Resettable, Radial, 3A	3	6	10.8	40	30	2	0.02	0.08	Option 1	Option G	MC33163
Fuse, Resettable, Radial, 4A	4	8	12.7	40	30	2.5	0.01	0.05	Option 2	Option H	MC33164
Fuse, Resettable, Radial, 5A	5	10	14.5	40	30	3	0.01	0.05	Option 2	Option I	MC33165
Fuse, Resettable, Radial, 6A	6	12	16	40	30	3.5	0.005	0.04	Option 2	Option J	MC33166
Fuse, Resettable, Radial, 8A	8	16	18.8	40	30	4	0.005	0.02	Option 2	Option L	MC33167
Fuse, Resettable, Radial, 9A	9	18	20	40	30	4.2	0.005	0.02	Option 2	Option M	MC33168

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO