# Radial Leaded PTC Resettable Fuse Multicomp PRO



# RoHS **Compliant**



#### **Features**

- Low hold current
- Solid state

### **Application**

· Telecom and wide Variety of Electronic Equipment

## **Specifications**

Lead Material : Tin plated copper

Soldering Characteristic : MIL-DTD-202, Method 208E **Insulating Coating** : Flame retardant epoxy

**Operating Current** : 0.05A to 3A Max. Voltage : 60V DC Temperature Range : -40°C to +85°C Approval : UL Approved

### **Electrical Characteristics (23°C)**

Part Number	Hold Current	Trip Current	Max. Time to Trip	Max. Current	Rated Voltage	Typical Power	Resistance	
							RMIN	R1max
	IH, A	IT, A	at 5 × Iн	IMAX, A	VMAX,V DC	Pd, W	Ω	Ω
MC36183	0.05	0.1	5	40	60	0.26	7.3	20
MC33169	0.1	0.2	4			0.38	2.5	7.5
MC33170	0.17	0.34	3			0.48	2	8
MC36187	0.2	0.4	2.2			0.41	1.83	4.4
MC36188	0.25	0.5	2.5			0.45	1.25	3
MC36189	0.3	0.6	3			0.49	0.88	2.1
MC36191	0.4	0.8	3.8			0.56	0.55	1.29
MC36192	0.5	1	4			0.77	0.5	1.17
MC36194	0.65	1.3	5.3			0.88	0.31	0.72
MC36195	0.75	1.5	6.3			0.92	0.25	0.6
MC36196	0.9	1.8	7.2			0.99	0.2	0.47
MC36197	1.1	2.2	8.2			1.5	0.15	0.38
MC36198	1.35	2.7	9.6			1.7	0.12	0.3
MC36199	1.6	3.2	11.4			1.9	0.09	0.22
MC36200	1.85	3.7	12.6			2.1	0.08	0.19
MC36201	2.5	5	15.6			2.5	0.05	0.13
MC36202	3	6	19.8			2.8	0.04	0.1

IH = Hold current-maximum current at which the device will not trip at 23°C still air IT = Trip current-minimum current at which the device will always trip at 23°C still air

VMAX =Maximum voltage device can withstand without damage at its rated current

IMAX = Maximum fault current device can withstand without damage at rated voltage (V MAX)

Pd = Typical power dissipated from device when in tripped state in 23°C still air environment

RMIN = Minimum device resistance at 23°C

R1MAX = Maximum device resistance at 23°C, 1 hour after tripping

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro




20/08/25 V1.1


# Radial Leaded PTC Resettable Fuse multicomp PRO



#### **Dimensions**



Lead Size: 24AWG Ø0.51mm Diameter




Lead Size: 20AWG ø0.81mm Diameter

Part Number	A Max.	B Max.	C Typical	D Min.	E Max.	F Typical	Drawing Option
MC36183							
MC33169	]						
MC33170	7,	12.7		7.6	3.1	1.1	Option 1
MC36187	7.4						
MC36188	1						
MC36189	1	13	]				
MC36191	7.6	13.5					
MC36192	7.9	13.7	5.1				
MC36194	9.7	14.5					
MC36195	10.4	15.2	1				
MC36196	11.7	15.8					
MC36197	13	18	]				
MC36198	14.5	19.6	]				Option 2
MC36199	16.3	21.3					
MC36200	17.8	22.9	]			1.4	
MC36201	21.3	3 26.4	40.0				
MC36202	24.9	30	10.2				

Dimensions: Millimetres

# **Thermal Derating Curve**

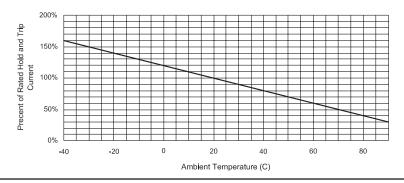

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro



# Radial Leaded PTC Resettable Fuse Multicomp PRO



= MC36183

= MC33169 = MC33170

= MC36187 = MC36188 = MC36189


= MC36191 = MC36192 = MC36194 = MC36195

= MC36196 = MC36197

= MC36198 = MC36199 = MC36200

= MC36201

### Typical Time-To-Trip at 23°C

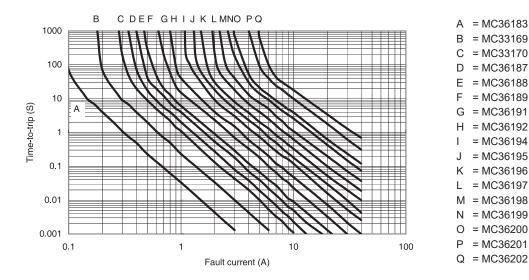

#### **Part Number Table**

Description	Part Number
50mA Radial Leaded PTC Resettable Fuse	MC36183
100mA Radial Leaded PTC Resettable Fuse	MC33169
170mA Radial Leaded PTC Resettable Fuse	MC33170
200mA Radial Leaded PTC Resettable Fuse	MC36187
250mA Radial Leaded PTC Resettable Fuse	MC36188
300mA Radial Leaded PTC Resettable Fuse	MC36189
400mA Radial Leaded PTC Resettable Fuse	MC36191
500mA Radial Leaded PTC Resettable Fuse	MC36192
650mA Radial Leaded PTC Resettable Fuse	MC36194
750mA Radial Leaded PTC Resettable Fuse	MC36195
900mA Radial Leaded PTC Resettable Fuse	MC36196
1.1A Radial Leaded PTC Resettable Fuse	MC36197
1.35A Radial Leaded PTC Resettable Fuse	MC36198
1.6A Radial Leaded PTC Resettable Fuse	MC36199
1.85A Radial Leaded PTC Resettable Fuse	MC36200
2.5A Radial Leaded PTC Resettable Fuse	MC36201
3A Radial Leaded PTC Resettable Fuse	MC36202

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

