

# DLM11CN500HH2#

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of DLM11CN500HH2# from the official website of Murata

http://www.murata.com/en-gb/products/productdetail?partno=DLM11CN500HH2%2

"#"at the end indicates the package specification code.











< List of part numbers with package codes > DLM11CN500HH2L



### **Applications**

Unsuitable	Please be sure to read and comply with			
Applications	these "Precautions for use."			
Specific Applications	Automotive powertrain/safety equipment, Automotive infotainment/comfort equipment,Medical equipment [GHTF A/B/C] except for implant & surgery & auto injector Please refer to Our Website and specifications, etc. for information about the performance, functions, quality, management, and safety required for the above applications, and use Products after confirming the performance and reliability of the actual Product.			
Recommended Applications	Automotive powertrain/safety equipment			



### Packaging Information

Packaging	Specifications	Standard Packing Quantity
L	180mm Embossed Tape	4000



### **Features**


1.Small size and tight dimensional tolerance Size:1.25x1.0x0.5mm

Tolerance:+-0.1mm

- 2. High common mode impedance up to 200ohm (at 100MHz)is available
- 3. Prevents signal damaging in high speed differential lines.
- 4. Automotive grade product.



### Appearance & Shape

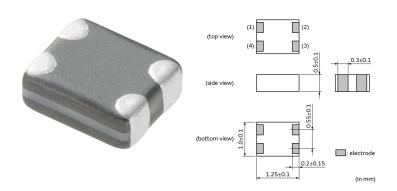

1 of 3

#### Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





## DLM11CN500HH2#

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of DLM11CN500HH2# from the official website of Murata

http://www.murata.com/en-gb/products/productdetail?partno=DLM11CN500HH2%23

"#"at the end indicates the package specification code.



## **Specifications**

Shape	SMD
<u> </u>	1
Size Code (in mm)	1210
Size Code (in inch)	0504
Length	1.25mm
Length Tolerance	±0.1mm
Width	1.0mm
Width Tolerance	±0.1mm
Thickness	0.5mm
Thickness Tolerance	±0.1mm
Common Mode Impedance (at 100MHz)	45Ω
Common Mode Impedance (at 100MHz) Tolerance	±25%
Rated Current	100mA
Derating of Rated Current	No
Rated Voltage	5Vdc
Withstanding Voltage	12.5Vdc
DC Resistance(max.)	2.5Ω
DC Resistance	2.0Ω±25%
Insulation Resistance(min.)	10ΜΩ
Cut-off Frequency	6GHz (Typ.)
Operating Temperature Range	-55°C to 125°C
Mass(typ.)	3.0mg
Number of Circuit	1
Operating Temperature Range(Self-temperature rise is included)	No

Brand	Murata

2 of 3

#### Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




# DLM11CN500HH2#


Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of DLM11CN500HH2# from the official website of Murata


"#"at the end indicates the package specification code.








Impedance-Frequency Characteristics




Differential Mode Transmission Characteristics (Typical Value)

Impedance-Frequency Characteristics (Main Items)

#### ■ Equivalent Circuit (Note 1)



Note1: The Port/Pin No. of the Simulation Model provided by our company is



**Equivalent Circuit** 

3 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering

