




Features:

- For surface mounted application in order to optimize board space.
- Low profile package.
- Built-in strain relief.
- Glass passivated junction.
- Excellent clamping capability.
- Fast response time: typically less than 1.0ps from 0 volt to BV minimum.
- Typical I_R less than $1\mu A$ above 10V.
- High temperature soldering guaranteed: $260^\circ C/10$ seconds at terminals.
- Plastic material used carries.
- 600 watts peak pulse power capability with a $10 \times 1000\mu s$ waveform by 0.01% duty cycle.

SMB/DO-214AA

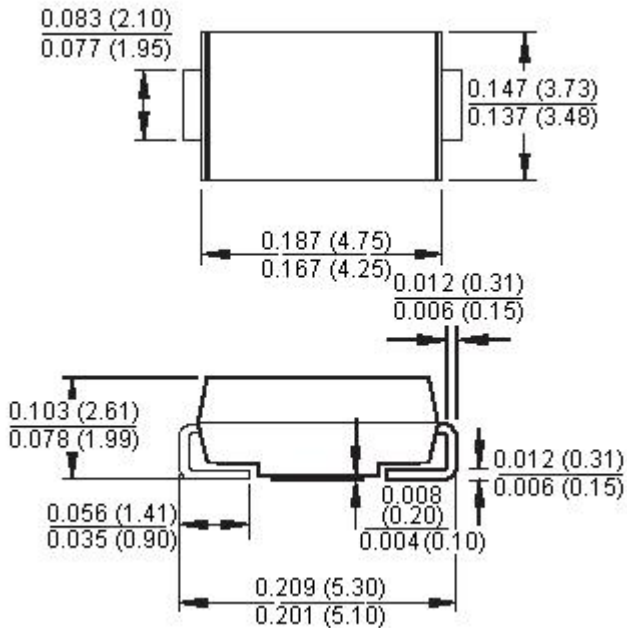

Dimensions : Inches (Millimetres)

Mechanical Data

Case	: Molded plastic
Terminals	: Pure tin plated lead free.
Polarity	: Indicated by cathode band.
Standard packaging	: 12mm tape (EIA STD RS-481).
Weight	: 0.093 gram.

Maximum Ratings and Electrical Characteristics

Rating at $25^\circ C$ ambient temperature unless otherwise specified.



Type Number	Symbol	Value	Units
Peak Power Dissipation at $T_A = 25^\circ\text{C}$, $T_p = 1\text{ms}$ (Note 1)	P_{PK}	Minimum 600	Watts
Steady State Power Dissipation	P_D	3	
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method) (Note 2, 3) - Unidirectional Only	I_{FSM}	100	Amps
Maximum Instantaneous Forward Voltage at 50.0A for Unidirectional Only (Note 4)	V_F	3.5/5.0	Volts
Typical Thermal Resistance (Note 5)	$R_{\theta JC}$ $R_{\theta JA}$	10 55	$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_J , T_{STG}	-65 to + 150	$^\circ\text{C}$

- Notes:
1. Non-repetitive current pulse and derated above $T_A = 25^\circ\text{C}$.
 2. Mounted on 5.0mm^2 (0.013mm thick) copper pads to each terminal.
 3. 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minutes maximum.
 4. $V_F = 3.5\text{V}$ on P6SMB6.8 thru P6SMB91 devices and $V_F = 5.0\text{V}$ on P6SMB100 thru P6SMB220 devices.
 5. Measured on P.C.B. with 0.27×0.27 Inch (7.0 x 7.0mm) copper pad areas.


Devices for bipolar applications

1. For bidirectional use C or CA suffix for types P6SMB6.8 through types P6SMB220A.
2. Electrical characteristics apply in both directions.


Ratings and Characteristic Curves

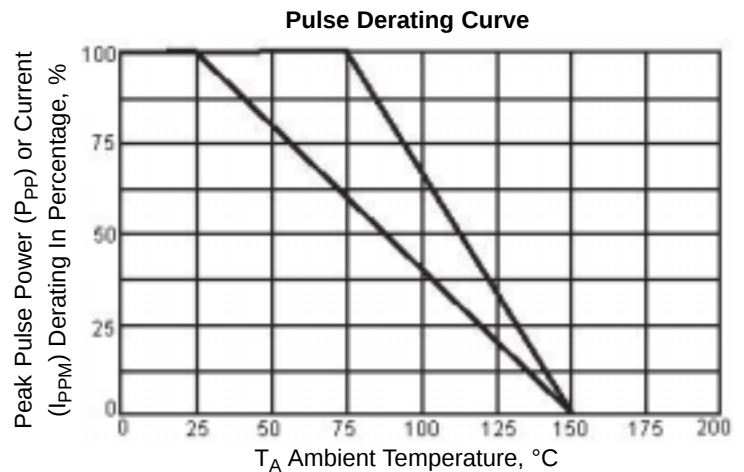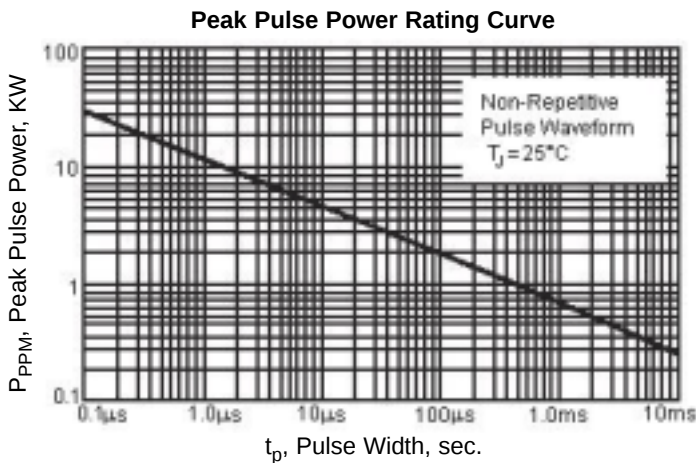


Clamping Power Pulse Waveform

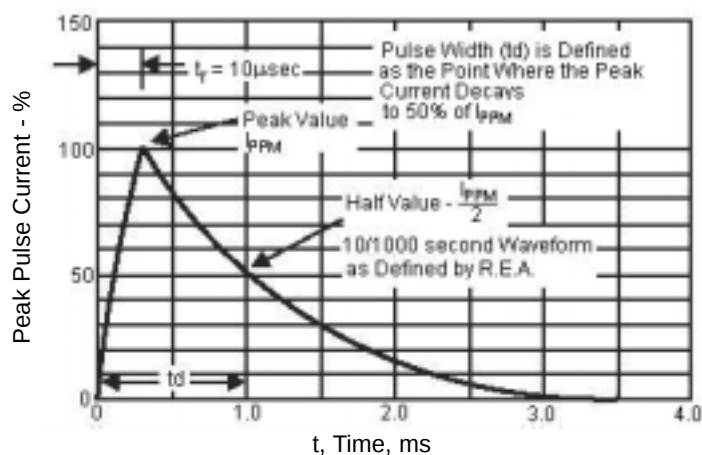

Maximum Non-Repetitive Forward Surge Current Unidirectional Only

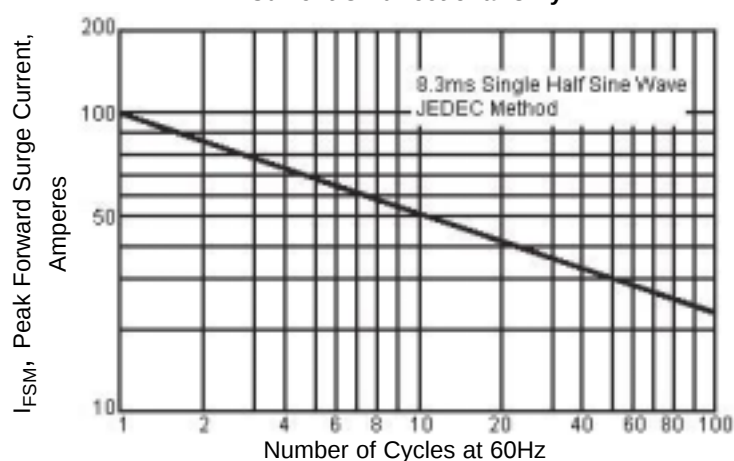

Typical Junction Capacitance (Unidirectional)

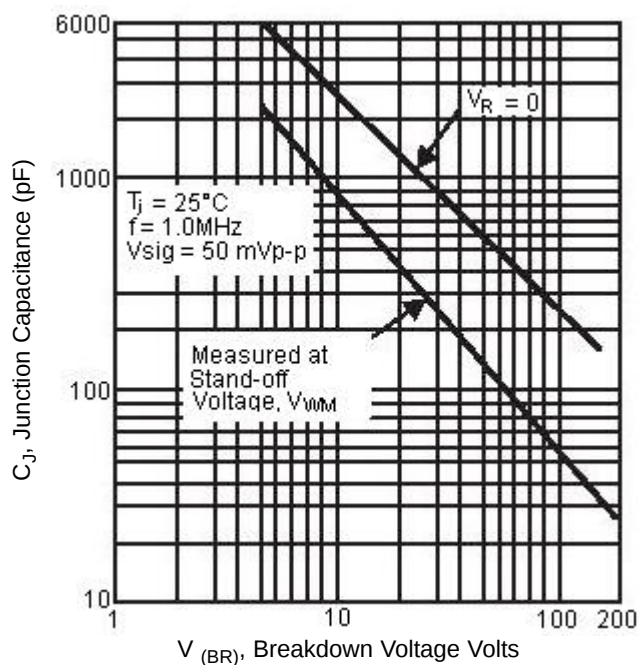

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Device		Device Marking Code	Breakdown Voltage		Test Current at I _T (mA)	Stand-Off Voltage V _{WM} (Volts)	Maximum Reverse Leakage at V _{WM} I _D (μA)	Maximum Peak Pulse Current I _{RSM} (Note 2) (Amps)	Maximum Clamping Voltage at I _{PPM} V _C (Volts)	Maximum Temperature Coefficient of V _{BR} (%/°C)
			V _{BR} (Volts) (Note 1)							
Unidirectional	Bidirectional		Minimum	Maximum						
P6SMB100A	P6SMB100CA	MXJ	95.0	105.0	1.0	85.5	5.0	4.5	137.0	0.106
P6SMB10A	P6SMB10CA	KPJ	9.50	10.5		8.55	10.0	43.0	14.5	0.073
P6SMB150A	P6SMB150CA	NKJ	143.0	158.0		128.0	5.0	3.0	207.0	0.108
P6SMB18A	P6SMB18CA	LEJ	17.1	18.9		15.3		25.0	25.2	0.088
P6SMB200A	P6SMB200CA	NTJ	190.0	210.0		171.0		2.2	274.0	0.108
P6SMB22A	P6SMB22CA	LKJ	20.9	23.1		18.8		20.0	30.6	0.092
P6SMB27A	P6SMB27CA	LPJ	25.7	28.4		23.1		16.8	37.5	0.096
P6SMB33A	P6SMB33CA	LTJ	31.4	34.7		28.2		13.8	45.7	0.098
P6SMB36A	P6SMB36CA	LVJ	34.2	37.8		30.8		12.6	49.9	0.099
P6SMB39A	P6SMB39CA	LXJ	37.1	41.0		33.3		11.6	53.9	0.100
P6SMB47A	P6SMB47CA	MEJ	44.7	49.4		40.2		9.7	64.8	0.101
P6SMB62A	P6SMB62CA	MMJ	58.9	65.1		53.0		7.4	85.0	0.104
P6SMB68A	P6SMB68CA	MPJ	64.6	71.4		58.1		6.8	92.0	
P6SMB6V8A	P6SMB6V8CA	KEJ	6.45	7.14	10.0	5.80	1000.0	60.0	10.5	0.057

Notes:

1. V_{BR} measured after I_T applied for 300 μs , I_T = square wave pulse or equivalent.
2. Surge current waveform and derate.
3. For bipolar types having V_{WM} of 10 volts and under, the I_D limit is doubled.
4. For bidirectional use C or CA suffix for types P6SMB6.8 through P6SMB220A.
5. All terms and symbols are consistent with ANSI/IEEE C62.35.

Notes:

International Sales Offices:

	AUSTRALIA - Farnell Tel No: ++61 1300 361 005 Fax No: ++61 1300 361 225		FINLAND - Farnell Tel No: ++ 358 9 560 7780 Fax No: ++ 358 9 345 5411		ITALY - Farnell Tel No: ++ 39 02 93 995 200 Fax No: ++ 39 02 93 995 300		SPAIN - Farnell Tel No: 901 20 20 80 Fax No: 901 20 20 90
	AUSTRIA - Farnell Tel No: ++ 43 662 2180 680 Fax No: ++ 43 662 2180 670		FRANCE - Farnell Tel No: ++ 33 474 68 99 99 Fax No: ++ 33 474 68 99 90		MALAYSIA - Farnell-Newark Tel No: ++ 60 3 7873 8000 Fax No: ++ 60 3 7873 7000		SWEDEN - Farnell Tel No: ++ 46 8 730 50 00 Fax No: ++ 46 8 83 52 62
	BELGIUM - Farnell Tel No: ++ 32 3 475 2810 Fax No: ++ 32 3 227 3648		GERMANY - Farnell Tel No: ++ 49 89 61 39 39 39 Fax No: ++ 49 89 613 59 01		NETHERLANDS - Farnell Tel No: ++ 31 30 241 7373 Fax No: ++ 31 30 241 7333		SWITZERLAND - Farnell Tel No: ++ 44 204 64 64 Fax No: ++ 44 204 64 54
	BRAZIL - Farnell-Newark Tel No: ++ 55 11 4066 9400 Fax No: ++ 55 11 4066 9410		HONG KONG - Farnell-Newark Tel No: ++ 852 2268 9888 Fax No: ++ 852 2268 9899		NEW ZEALAND - Farnell Tel No: 0800 90 80 80 Fax No: 0800 90 80 81		UK - Farnell Tel No: ++ 44 8701 200 200 Fax No: ++ 44 8701 200 201
	CHINA - Farnell-Newark Tel No: ++86 10 6238 5152 Fax No: ++86 10 6238 5022		HUNGARY - Farnell Tel No: ++ 44 870 1200 208 Fax No: ++ 44 870 1200 209		NORWAY - Farnell Tel No: 800 146 70 Fax No: 800 146 76		UK - CPC ++ 44 8701 202 530 ++ 44 8701 202 531
	CZECH REPUBLIC - Farnell Tel No: ++ 44 870 1200 208 Fax No: ++ 44 870 1200 209		INDIA - Farnell Tel No: ++ 44 870 1200 208 Fax No: ++ 44 870 1200 209		PORTUGAL - Farnell Tel No: ++ 34 93 475 8804 Fax No: ++ 34 93 474 5288		USA - Newark Tel No: 800 463 9275
	DENMARK - Farnell Tel No: ++ 45 44 53 66 44 Fax No: ++ 45 44 53 66 06		IRELAND - Farnell Tel No: ++ 353 1 830 9277 Fax No: ++ 353 1 830 9016		RUSSIA - Farnell Tel No: ++ 44 870 1200 208 Fax No: ++ 44 870 1200 209	 EXPORT - Farnell Tel No: ++ 44 8701 200 208 Fax No: ++ 44 8701 200 209 For enquiries from all other markets	
	ESTONIA - Farnell Tel No: ++ 358 9 560 7780 Fax No: ++ 358 9 345 5411		ISRAEL - Farnell Tel No: ++ 180 937 0015 Fax No: ++ 180 937 0014		SINGAPORE - Farnell-Newark Tel No: ++ 65 6788 0200 Fax No: ++ 65 6788 0300		

<http://www.farnell.com>
<http://www.newark.com>
<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2008.