

Shuttleworth Road, Elms Industrial Estate, Bedford. MK41 0EP UK TEL +44(0)1234 330077 FAX +44(0)1234 330088 E-mail sales@dagnall-electronics.com

Iss 1 13/05/03

## PRODUCT DATASHEET

#### 12VA PCB MOUNTED TRANSFORMER



Designed, manufactured and tested in accordance with;

BS3535, EN60742\*, EN61558\*, EN60950

- CE Marked
- Single 230V or Dual 115V primaries
- Comprehensive choice of secondary voltages
- Flame retardant bobbins and shrouds
- Fully shrouded construction

| Weight             | 0.4                     | Kg |  |
|--------------------|-------------------------|----|--|
| Typical Regulation | 12                      | %  |  |
| Frequency          | 50/60                   | Hz |  |
| Max Ambient        | 25                      | °C |  |
| Bobbin Material    | UL94-V0 Class "B" 130°C |    |  |

\* requires additional over-current / over-temperature protection.

Please see sheet 2 for part numbers.

THIS DOCUMENT IS THE PROPERTY OF DAGNALL ELECTRONICS LIMITED WHICH HOLDS THE COPYRIGHT IN THE DRAWING AND ALL THE DESIGN RIGHTS IN THE PRODUCT OR COMPONENTS DESCRIBED. ANY INFORMATION SHALL NOT BE COPIED, REPRODUCED OR DIVULGED TO A THIRD PARTY NOR SHALL THE PRODUCT OR COMPONENTS BE MADE, COPIED OR REPRODUCED OR ITS EXISTENCE DISCLOSED TO A THIRD PARTY WITHOUT THE PRIOR CONSENT IN WRITING OF DAGNALL ELECTRONICS LIMITED. IN THE INTEREST OF TECHNICAL IMPROVEMENT AND/OR CUSTOMER SERVICE DAGNALL ELECTRONICS RESERVES THE RIGHT TO INTRODUCE MODIFIED SPECIFICATIONS TO ANY OF THE PRODUCTS ILLUSTRATED OR DESCRIBED IN THIS DATASHEET. E&OE



Shuttleworth Road, Elms Industrial Estate, Bedford. MK41 0EP UK TEL +44(0)1234 330077 FAX +44(0)1234 330088 E-mail sales@dagnall-electronics.com

Iss 1 13/05/03

Part Numbers

| Part No | Primary | Secondary | Recommended<br>Secondary Fuse |
|---------|---------|-----------|-------------------------------|
| D3016   | 230     | 6+6       | 1A                            |
| D3017   | 230     | 9+9       | 0.80A                         |
| D3018   | 230     | 12+12     | 0.50A                         |
| D3019   | 230     | 15+15     | 0.40A                         |
|         |         |           |                               |
| D3020   | 115+115 | 6+6       | 1A                            |
| D3021   | 115+115 | 9+9       | 0.80A                         |
| D3022   | 115+115 | 12+12     | 0.50A                         |
| D3023   | 115+115 | 15+15     | 0.40A                         |

Please see sheets 3 and 4 for dimensions, pin outs and connection information.


THIS DOCUMENT IS THE PROPERTY OF DAGNALL ELECTRONICS LIMITED WHICH HOLDS THE COPYRIGHT IN THE DRAWING AND ALL THE DESIGN RIGHTS IN THE PRODUCT OR COMPONENTS DESCRIBED. ANY INFORMATION SHALL NOT BE COPIED, REPRODUCED OR DIVULGED TO A THIRD PARTY NOR SHALL THE PRODUCT OR COMPONENTS BE MADE, COPIED OR REPRODUCED OR ITS EXISTENCE DISCLOSED TO A THIRD PARTY WITHOUT THE PRIOR CONSENT IN WRITING OF DAGNALL ELECTRONICS LIMITED. IN THE INTEREST OF TECHNICAL IMPROVEMENT AND/OR CUSTOMER SERVICE DAGNALL ELECTRONICS RESERVES THE RIGHT TO INTRODUCE MODIFIED SPECIFICATIONS TO ANY OF THE PRODUCTS ILLUSTRATED OR DESCRIBED IN THIS DATASHEET. E&OE


Shuttleworth Road, Elms Industrial Estate, Bedford. MK41 0EP UK TEL +44(0)1234 330077 FAX +44(0)1234 330088 E-mail sales@dagnall-electronics.com Issue 2. 23/6/03

#### PRODUCT DATASHEET


#### **12VA PCB MOUNTED TRANSFORMER**


Outline Drawing 230V version





**Outline Drawing Dual 115V version** 

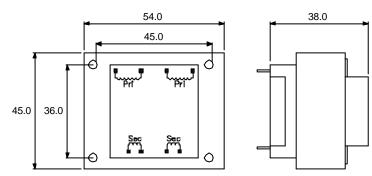




THIS DOCUMENT IS THE PROPERTY OF DAGNALL ELECTRONICS LIMITED WHICH HOLDS THE COPYRIGHT IN THE DRAWING AND ALL THE DESIGN RIGHTS IN THE PRODUCT OR COMPONENTS DESCRIBED. ANY INFORMATION SHALL NOT BE COPIED, REPRODUCED OR DIVULGED TO A THIRD PARTY NOR SHALL THE PRODUCT OR COMPONENTS BE MADE, COPIED OR REPRODUCED OR ITS EXISTENCE DISCLOSED TO A THIRD PARTY WITHOR CONSENT IN WRITING OF DAGNALL ELECTRONICS LIMITED. IN THE INTEREST OF TECHNICAL IMPROVEMENT AND/OR CUSTOMER SERVICE DAGNALL ELECTRONICS RESERVES THE RIGHT TO INTRODUCE MODIFIED SPECIFICATIONS TO ANY OF THE PRODUCTS ILLUSTRATED OR DESCRIBED IN THIS DATASHEET. E&OE

Shuttleworth Road, Elms Industrial Estate, Bedford. MK41 0EP UK TEL +44(0)1234 330077 FAX +44(0)1234 330088 E-mail sales@dagnall-electronics.com Issue 1. 14/05/03


#### PRODUCT DATASHEET

#### **12VA PCB MOUNTED TRANSFORMER**


Connection Diagrams for D3016

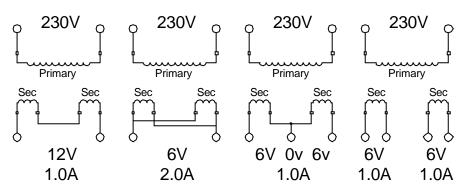

Connection Diagrams for D3020 - 230V supply

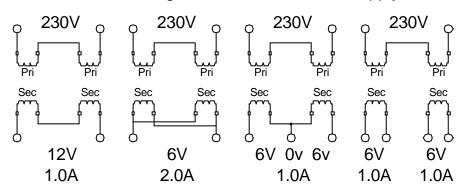

Connection Diagrams for D3020 - 115V supply

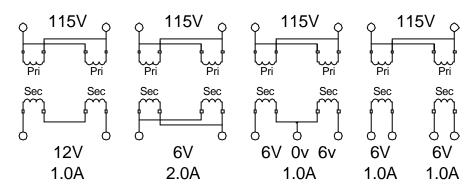

THIS DOCUMENT IS THE PROPERTY OF DAGNALL ELECTRONICS LIMITED WHICH HOLDS THE COPYRIGHT IN THE DRAWING AND ALL THE DESIGN RIGHTS IN THE PRODUCT OR COMPONENTS DESCRIBED. ANY INFORMATION SHALL NOT BE COPIED, REPRODUCED OR DIVULGED TO A THIRD PARTY NOR SHALL THE PRODUCT OR COMPONENTS BE MADE, COPIED OR REPRODUCED OR ITS EXISTENCE DISCLOSED TO A THIRD PARTY WITHOUT THE PRIOR CONSENT IN WRITING OF DAGNALL ELECTRONICS LIMITED. IN THE INTEREST OF TECHNICAL IMPROVEMENT AND/OR CUSTOMER SERVICE DAGNALL ELECTRONICS RESERVES THE RIGHT TO INTRODUCE MODIFIED SPECIFICATIONS TO ANY OF THE PRODUCTS ILLUSTRATED OR DESCRIBED IN THIS DATASHEET. E&OE