

- use with care.
- avoid prolonged exposure to the sun.
- 1.4 Excessive gas flow, flaming or catalyst pulsing red may
- nace or combustible materials.
- 1.6 KEEP WORK AREA CLEAN. Cluttered areas and benches
- 1.7 KEEP CHILDREN AWAY. Visitors should be kept away from work area.

- 1.1 Unit contains flammable gas (Butane) under pressure -
- 1.2 DO NOT expose to heat above +50°C (120°F) and
- occur when the GAS CONTROL LEVER is incorrectly adjusted, ie., set too high.

## IMPORTANT SAFETY INSTRUCTIONS

- 1.11 USE SAFETY GLASSES.
- 1.3 DO NOT puncture or incinerate.
- 1.5 DO NOT refill, ignite or use near open flame, heater, fur-
- invite injuries.

# 1.10 BE extremely careful as torch flame is almost invisible in

- 1.12 DON'T OVERREACH. Keep proper footing and balance at all

1.13 STAY ALERT. Watch what you are doing. Use common sense.

1.8 STORE WHEN NOT IN USE. Store in dry, locked cabinet out

1.9 BE extremely careful as torch flame tip temperature is over


- Do not operate when you are tired. 1.14 DO NOT TOUCH THE HEATED TIP OR BARREL OF THE UNIT.
- 1.15 DO NOT leave unit unattended when it is operating or hot.
- 1.16 ALWAYS BE SURE THE UNIT IS COOL BEFORE STORING.
- 1.17 DO NOT REPLACE CAP WITHOUT SWITCHING UNIT OFF AND ENSURING TIP HAS COOLED.
- 1.18 USE ONLY IN WELL VENTILATED AREA.

of reach of children.

daylight or strong light.

1300°C (2500°F)

1.19 DO NOT attempt to readjust or repair, unit is not user serviceable.

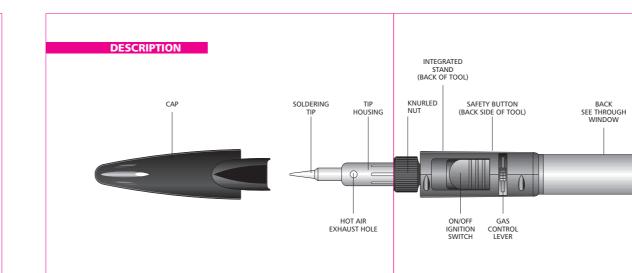

## REFUELING

### 2.1 Fill LEC

- a. Use standard Butane Fuel
- b. Invert butane can to allow gravity assist (Fig1)
- c. Allow up to 5 minutes at room temperature for fuel to stabilize before use.

### 2.2 Insert LEC into Chamber

e. Replace Chamber Cap

- a. Remove Chamber Cap
- b. Insert LEC into Pro-150 chamber (fig 2.1)
- c. Insert with gray flat side toward inside of
- d. Do not force LEC into chamber as cap will properly seat LEC in chamber




# HOW TO USE SOLDERING IRON

- a. Set Gas Control level at mid position
- b. While pushing in and holding ignition safety button "A" lift up ON/OFF IGNITION SWITCH to the "ON" position to start the flow of gas.


switch downward toward the bottom

c. Push the switch upward toward the tip to the maximum point to ignite and then release. The switch will move back to the "ON" position automatically. d. To turn off, slide the ON/OFF ignition



# IGNITION WARNINGS

- 3.C Do not touch Tip, Tip Housing or Knurled Nut while
- 3.D Do not ignite the unit when "Tip Assembly" is not screwed on.



## ADJUSTMENT

www.pro-iroda.com.tw

© 2006.03

- 4.1 The tip temperature can be adjusted by turning the GAS CONTROL LEVER observing the - + signs on the body.
- 4.2 Ideally set the GAS CONTROL LEVER to **mid** position when soldering or
- 4.3 It is not necessary for the catalyst inside the tip to glow bright red to achieve satisfactory soldering temperatures. Experience will dictate the adjuster setting required.




- 5.1 Be sure the tip has cooled before
- damage.
  - - Be careful not to overtighten as this could damage the nozzle assembly and thread in the body.

### CHANGING TIPS

- 5.2 The catalyst seen through the Hot Air Exhaust Hole of the soldering tip is very delicate and will not sustain mechanical abuse without serious
- 5.3 The soldering tip is easily removable
- allowing the installation of other style tips or the replacement of a worn tip. After the soldering tip is cool, simply unscrew it with a counterclockwise motion.

### CLEAN OR REPLACE ORIFICE ASSEMBLY

- 6.1 Remove soldering tip and flame collar in the normal manner. 6.2 While holding the torch straight up in the vertical position, unscrew
  - Nozzle Assembly (A) from the Torch Body (C). You may have to use a pliers or other tool to start unscrewing. Do not grasp and turn the Ceramic Head (D). 6.3 Carefully remove Orifice Assembly (B) by lifting out of torch body.
  - NOTE THAT THE SHORTER SIDE OF ORIFICE ASSEMBLY FITS INTO TORCH 6.4 Soak Orifice Assembly in Naphtha or other similar
  - solvent for approximately 5 minutes. 6.5 Replace clean (or new) Orifice Assembly
  - remembering to insert the SHORTER SIDE INTO TORCH BODY. 6.6 Replace Nozzle Assembly
  - and hand tighten or tighten gently with a pliers grasping the shank of the Nozzle Assembly.




## REPLACE CAP

7.1 When replacing cap please refer as shown picture 7.1

## CLEANING

8.1 Use only mild soap and a damp cloth to clean the housings of the tool. Many household cleaners contain chemicals which could seriously damage the plastic. Also do not use gasoline, turpentine, lacquer or paint thinner, dry cleaning fluids or similar products. Never let any liquid get inside the tool; never immerse any part of the tool into a liquid.







ACCESSORIES 9.1 The accessories Listed below are available from your

WINDOW

Soldering Tip	PS-01	1.6mm	Conical
Soldering Tip	PS-02	3.2mm	Conical
Soldering Tip	PS-03	2.4mm	Chisel
Soldering Tip	PS-04	3.2mm	Chisel
Soldering Tip	PS-05	2.4mm	Angle
Soldering Tip	PS-06	3.2mm	Angle

SOLDERPRO 150, do not attempt to repair the unit body.

		•
PROBLEM	PROBABLE CAUSE	HOW TO CORRECT
10.1 Does not ignite	a. Empty LEC     b. Too high or low fuel pressure     c. Push on/off ignition switch too fast.     d. Clogged orifice assembly	a. Refill with butane fuel     b. Adjust control lever to     higher or lower positio     c. Re-read "How to use as     a soldering iron"     d. Clean or replace with n     orifice assembly
10.2 Low gas pressure or	a. Clogged orifice assembly b. Cold fuel	a. Clean or replace with n     b. Hold body in hands to

a. Used-up catalyst

b. Insufficient fuel

10.3 Tip does not

# CAUTION: Do not use other than recommended accessories or attachments.

Hot nife PS-09

PART

Heat

Blower

Orifice

Assembly

PS-14

### TROUBLE SHOOTING

10. To reduce the risk of personal injury, property damage, or damage to your

PROBLEM	PROBABLE CAUSE	HOW TO CORRECT
10.1 Does not ignite	a. Empty LEC	a. Refill with butane fuel
	b. Too high or low fuel pressure	<ul> <li>b. Adjust control lever to a higher or lower position.</li> </ul>
	<ul> <li>c. Push on/off ignition switch too fast.</li> </ul>	c. Re-read "How to use as a soldering iron"
	d. Clogged orifice assembly	d. Clean or replace with new orifice assembly
10.2 Low gas	a. Clogged orifice assembly	a. Clean or replace with new one
pressure or low flame	b. Cold fuel	<ul> <li>b. Hold body in hands to allow unit to warm up.</li> </ul>
	c. Low fuel	c. Refuel

a. Replace with new tip.

b. Adjust control lever to

a higher position.

c. Clogged orifice assembly c. Clean or replace with new one.

# SPECIAL WARNING

- 11.1 This product, when used for soldering and similar applications, produces chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.
- 11.2 Department of Transportation Hazardous Materials Regulations forbid the carriage of butane or other flammable gas products on passenger aircraft. Do not pack this item or any other flammable gas item, in any checked or carry-on baggage.