

Customer: ALPS Europe Distribution

No. 12E2006-2828

Date: May. 11, 2006

Attention:

Your ref. No.:

Your Part No.: EC12E24242A2

SPECIFICATIONS

ALPS' ;

MODEL: EC12E24242A2

Spec. No.:

Sample No.: F 3 1 3 3 9 5 4 M

RECEIPT STATUS

RECEIVED

By Date

Signature

Name

Title

ALPS[®]
ALPS ELECTRIC CO., LTD.

Head Office
1-7, Yukigaya-otsuka-cho, Ota-ku, Tokyo, 145-8501 Japan
Phone, +81(3)3726-1211

DSG'D

K. Abe

APP'D

S. Sato

ENG. DEPT. DIVISION

Sales

B6523

Q1003#03A (EA)

S P E C I F I C A T I O N S

1. THIS SPECIFICATIONS APPLY TO EC12E24242A2 ROTARY ENCODERS.

2. CONTENTS OF THIS SPECIFICATIONS.

F3133954M

LE21240A

3. MARKING

• MARKING ON ALL UNITS

DATE CODE

• CAUTION

Regardless of the suggested applications of these products being introduced in the specifications, when using them for equipment and devices requiring a high degree of safety, respective manufacturers will please preserve safety of the planned equipment and devices by providing necessary protective circuits and redundancy circuits and reconfirm if safety is being duly preserved.

Products being introduced in the specifications have been designed and manufactured for applications to ordinary electronic equipment and devices such as the AV equipment, electric home appliances, office machines and communications equipment. Consequently, when employing these products for applications requiring a high degree of safety and reliability such as the medical equipment, aviation and aircraft equipment, space equipment and burglar alarm equipment, the using manufacturers will please thoroughly study the proprieties of these products for the planned applications.

Although we are exerting our best efforts to maintain the quality of these products, we cannot guarantee that they will never cause short circuiting and open circuitry. Therefore, when designing an equipment or device with which the priority is given to the safety, you will please carefully study the influences to the whole equipment of a single function failure of Potentiometers and Encoders in advance to make out a fail-safe design providing.

項目 Item	条件 Conditions	規格 Specifications
5-1 総回転角度 Total rotational angle		360° (±7° MAX) 360° (Errorless)
5-2 クリック力 Detent torque	(クリック作動のみ適用) (Applied for with-detent type)	3~20mN·m
5-3 クリック位置及び位置 Number and position of detents		24 detents (27°/7個 15°±3°) (Step angle: 15°±3°)
5-4 押し引き強度 Push-pull strength of shaft	軸心押し及び引き方向に50Nの荷重を10秒間加える。(PCB半田付け時) Push and pull static load of 50N shall be applied to the shaft in the axial direction for 10s. (After soldering of the PC-board)	軸心押し及び引き方向に50Nの荷重を10秒間加える。荷重を除去後、軸は元の位置に戻らなければならない。 Without excessive play in shaft. No excessive abnormality in rotational feeling. And electrical characteristics shall be satisfied.
5-5 端子強度 Terminal strength	端子強度の任意の一方に3Nの荷重を10秒間加える。 A static load of 3N shall be applied to the tip of terminals for 10s in any direction	端子強度の任意の一方に3Nの荷重を10秒間加える。 Without excessive play in terminals or poor contact.
5-6 軸揺れ Shaft wobble	軸揺れ55mmの範囲で50mN・mの軸揺れモーメントを加える。 A momentary load of 50mN·m shall be applied at the point 5mm from the tip of the shaft in a direction perpendicular to the axis of shaft.	1. 0xL/30mm (p以内) 1. 0xL/30mm (p MAX) (Lは軸長、pは軸径) (L: Shaft length)
5-7 軸心強度 Strength of shaft	軸心強度55mmの範囲で20Nの荷重を10秒間加える。(PCB半田付け時) A load of 20N shall be applied at the point 5mm from the tip of the shaft in a direction perpendicular to the axis of shaft. (After soldering of the PC board)	軸心強度55mmの範囲で20Nの荷重を10秒間加える。 Without excessive play or bending in shaft. No mechanical abnormality.
5-8 軸の回転方向の揺れ Rotational wobble	角速度で測定する。 Measure with Jig for rotational angle	4° 以内。 4° MAX

5. 機械特性 Mechani Characteristics

APPS. CHKD. DSBD. TITLE 12形回転器エコーダ
Apr. 22, '99 Apr. 22, '99 Apr. 22, '99 12mm Size Rotary Encoder

SYMB. DATE APPD. CHKD. DSBD. DOCUMENT NO. F3133954M (4/9)

項目 Item	条件 Conditions	規格 Specifications
2) 滑動ノイズ (Sliding noise)	コードON時の0.1.5V以上の電圧変動なし。チャタリング、ヒステリシス、バウンス、リバウンド、または、5V以上の電圧変動が1ms未満の間は、滑動ノイズと見做される。 Specified by the time of voltage change exceed 1.5V in code-ON area. When the bounce time less than 1ms between chatter lines (t ₁ or t ₂), the voltage change shall be regarded as a part of chatter line. When the code-ON time between 2 bounces is less than 1ms, they are regarded as 1 linked bounce.	t ₂ ≤ 2ms
3) 滑動ノイズ Sliding noise	コードOFF時の電圧変動なし。 The voltage change in code-OFF area.	3.5V以上 3.5V MIN
4-4 絶縁強度 Dielectric strength	端子-接地間電圧A, C. 50V(1分間)とする。(U-I電流1mA) A voltage of 50V A.C. shall be applied for 1min between individual terminals and bracket. (Leak current 1mA)	絶縁強度0.1mA以下 Without arcing or breakdown.
4-6 絶縁抵抗 Insulation resistance	端子-接地間電圧D. C. 50V(1分間)とする。 Measurement shall be made under the condition which a voltage of 50V D.C. is applied between individual terminals and bracket.	端子-接地間電圧D.C. 50V以上 Between individual terminals and bracket: 10MΩ MIN
4-6 差圧 Pressure-difference	差圧で測定される。 Measurement shall be made under the condition which the shaft is rotated in constant speed. <Fig. 4> ΔT=0.08T ±1% MIN In<Fig. 4>	<Fig. 4> ΔT=0.08T ±1% MIN In<Fig. 4>

APPS. CHKD. DSBD. TITLE 12形回転器エコーダ
Apr. 22, '99 Apr. 22, '99 Apr. 22, '99 12mm Size Rotary Encoder

SYMB. DATE APPD. CHKD. DSBD. DOCUMENT NO. F3133954M (3/9)

項目 Item	条件 Conditions	基準 Specifications
5-9 はんだ付熱 Resistance to soldering heat	7頁⑩「はんだ付条件」による。 Specified by the clause 7 "soldering conditions".	はんだ付条件、電圧降下を規定する こと。また、著しいメカニカル損傷 を来してはならない。 Electrical characteristics shall be satisfied. No mechanical abnormality such as a excessive play. 電圧降下は、定格電圧の95% 以上をいかなる条件下でも A new uniform coating of solder shell cover a minimum of 95% of the surface being tinned.

APPD.	CHKD.
Apr. 22, '99	Apr. 22, '99
K. ITO	Y. KANZAKI
TITLE 12形回転式エンコーダ 12mm Size Rotary Encoder	
DOCUMENT NO. F 3133954M	
SYMB	DATE
APPD	CHKD
DSGD	DSGD

項目 Item	条件 Conditions	基準 Specifications
6-1 回転寿命 Rotational life	原料が機械600~1000/Hの速度で、30,000回回転試験を行行、 The shaft of encoder shall be rotated to 30,000 cycles at a speed of 600~1000/H without electrical load, after which measurements shall be made.	チタリダテ 1.1±5%MS ノイズ 1.5MS Chattering 1.1±5MS Bounce 1.5MS クランクが壊れてはならない。 Detent feeling has to remain.
6-2 耐湿性 Damp heat	湿度40±2°C、湿度90~95%の環境中で240±10時間試験後、室温中で1.5時間 放置する。 The encoder shall be stored at a temperature of 40±2°C with relative humidity of 90% to 95% for 240±10H in a thermostatic chamber. And then the encoder shall be subjected to standard atmospheric conditions for 1.5H, after which measurement shall be made.	相対湿度 (4.1~4.5及び5.1) 各満足すること。 Specifications in clause 4.1~4.5 and 5.1 shall be satisfied.
6-3 耐熱性 Dry heat	湿度85±3°Cの環境中で240±10時間試験後、室温中で1.5時間放置する。 The encoder shall be stored at a temperature of 85±3°C for 240±10H in a thermostatic chamber. And then the encoder shall be subjected to standard atmospheric conditions for 1.5H, after which measurements shall be made.	
6-4 耐寒性 Cold	湿度-40±3°Cの環境中で240±10時間試験後、室温中で1.5時間放置する。 The encoder shall be stored at a temperature of -40±3°C for 240±10H in a thermostatic chamber. And then the encoder shall be subjected to standard atmospheric conditions for 1.5H, after which measurement shall be made.	
6-5 落下耐性 Free falling	50cmの高さより製品を任意の向きに落下させ、落下後5分間コンクリートの床に自由落下させる。 The encoder shall be fallen freely at any posture from 50cm height to the concrete floor covered with vinyl-tile, after which measurement shall be made.	著しい変形、著しい劣化なく試験結果 (4.1~4.5及び5.1)を 満足すること。 (但し、端子部の劣化は除く。) NO EXCESSIVE DEFORMATION OR DAMAGE. (EXCEPT THE DEFORMATION OF TERMINALS.) AND SPECIFICATIONS IN CLAUSE 4.1~4.5 AND 5.1 SHALL BE SATISFIED.
6-6 耐振性 Vibration	10~55~10Hzと規定される振動(1周毎1分/振幅1.5mm)をX、Y、Z、各方向 2時間行う。 The following vibration shall be applied to the encoder, after which measurement shall be made: The entire frequency range, from 10Hz to 55Hz and return to 10Hz, shall be traversed in 1 min. Amplitude (total excursion): 1.5mm. This motion shall be applied for a period of 2H in each of 3 mutually perpendicular axes (A total of 6H).	相対湿度 (4.1~4.5及び5.1) 各満足すること。 Specifications in clause 4.1~4.5 and 5.1 shall be satisfied.

APPD.	CHKD.
Apr. 22, '99	Apr. 22, '99
K. ITO	Y. KANZAKI
TITLE 12形回転式エンコーダ 12mm Size Rotary Encoder	
DOCUMENT NO. F 3133954M	
SYMB	DATE
APPD	CHKD
DSGD	DSGD


9. その他、取扱い ご注意 PRECAUTIONS IN USE

9-1. 保管は高温、多湿の場所及び腐食性ガスを避けて下さい。
 During operation, storage in high temperature and humidity, and in corrosive gas, should be avoided.

9-2. エンコーダのハ・ムスカウンタ基盤の過渡応答については動作スピード、サンプリングタイム、マスキングタイム等について注意し、実装回路の上で確認をお願いします。
 In case of pulse count process design, operational speed, sampling time, and masking time etc should be taken into the consideration.
 Please check above matter at first on your circuit for the secure reason.

9-3. 本製品はクリック位置でA相はOFF状態で空定とありますので、ソフト起動時A相起動まで待機願います。
 A phase should be design criterion prior to B phase.
 Because A phase has steady off signal at detent position.

9-4. エンコーダのハ・ムスカウンタ基盤の周囲は図のフィルタをいれねことを推奨します。
 For your pulse count design, it should be considered to add C/R filter on your circuit shown as below.

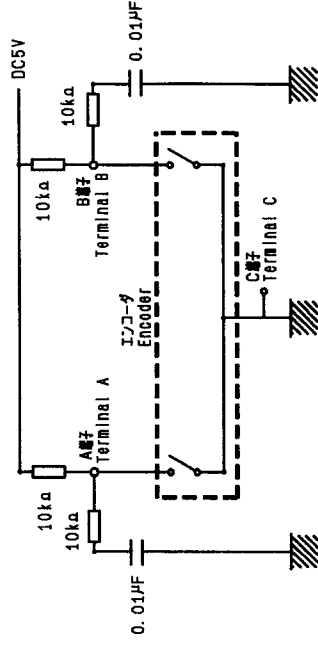

9-5. 本製品の本体に直接水気がかかりますと、ハ・ムス波形成異常が発生する可能性がありますので、製品に直接水気がかからないよう配置願います。
 Care must be taken not to expose this product to water or dew to prevent possible problem in pulse output wave form.

9-6. 医療用途、器具への本製品の御使用は避けて下さい。
 Please avoid to medical instrument because this encoder is audio use.

9-7. 本製品は軸対称構造の検知力が加わりますと、製品性能を著る劣化がありますので、あらかじめつねにガイドを避ける等の配慮をお願いします。
 Consideration to provide protective guard for knob is highly recommended to avoid side pressure to the shaft.

9-8. 本製品は軸対称構造の検知力が加わりますと、製品性能を著る劣化がありますので、ご注意下さい。
 Excessive impact force may decrease the performance of this product. Please pay attention to impact force.

7. ばりど付け条件 Soldering conditions

7-1 手ばりど付け条件 Manual soldering

温度 350°C以下、時間 3分以内
 Bit temperature of soldering iron : 350°C or less.
 Application time of soldering iron : within 3s.

7-2 ディップばりど付け条件 Dip soldering

ばりど液 : t1. 6分間浸漬
 Printed wiring board: Single-sided copper clad laminate board with thickness of 1.6mm.


フラックス : 比厚0.82以上のフラックスを引出し型式フラックスで塗布面を塗り、基板裏面をフラックスの浸入がないうこと。
 Flux: Specific gravity: 0.82 or more.
 - Flux shall be applied to the board using a bubble foaming type fluxer.
 - The board shall be soaked in the flux bubble only to the middle of its thickness.
 - Flux shall not come into contact with the component side surface.

プリヒート : 基板裏面を100°C以下、時間1分以内
 Preheating: Surface temperature of board: 100°C or less.
 Preheating time: within 1 min.

ばりど : 温度 260°C±5°C、時間 3秒±1秒以内
 Soldering: Solder temperature: 260°C ±5°C.
 Immersion time: within 3s

以上の工程を1回または2回繰り返す。
 Apply the above soldering process for 1 or 2 times.
 8. ばりど付け時の注意事項 Note for soldering method.

8-1 上側のP.C.B.の上表面にばりどを施す際は、ご注意ください。
 Please avoid soldering on upper surface (the component side surface) of the PC board as shown below.



8-2 半田テック、トップの塗布について「エンコーダ」-内Eフラックスが浸入する場合があります。
 塗布不良の原因となりますのでご注意ください。
 Please avoid cleaning of PCB board because the flux used during the dip soldering process may enter the encoder and cause poor contact

ALPS ELECTRIC CO., LTD.

APPD. CHKD. DSBD. TITLE 12形回転エンコーダ
 APR. 22, '99 APR. 22, '99 APR. 22, '99 12mm Size Rotary Encoder

K. ITO Y. KANZAKI H. MIURA DOCUMENT NO. F3133954M (7/9)

ALPS ELECTRIC CO., LTD.

APPD. CHKD. DSBD. TITLE 12形回転エンコーダ
 APR. 22, '99 APR. 22, '99 APR. 22, '99 12mm Size Rotary Encoder

K. ITO Y. KANZAKI H. MIURA DOCUMENT NO. F3133954M (8/9)

1. 定格電圧 (定格電流)
Switch rating (Resistor load)

D. C. 5V10mA (1mA MIN)

2. 電気的特性 Electrical characteristics

項目 Item	条件 Conditions	規格 Specifications
2-1 接触抵抗 Contact resistance	D. C. 5V10mA電圧降下法にて測定する。 Measured by the 1mA 5V D. C. voltage drop method.	100mΩ MAX.
2-2 チャタリング Chattering	1サイクル (OFF-ON-OFF) 1秒で動作させる。 Switch is operated at the rate of 1 cycle 1 sec. The 1 cycle shall be OFF-ON-OFF.	10msec以下 Less than 10msec
2-3 絶縁抵抗 Insulation resistance	端子-端子間電圧D. C. 50V1mAで測定する。 Measurement shall be made under the condition which a voltage of 50V D. C. 1mA is applied between individual terminals and bracket.	端子-端子間電圧にて10MΩ以上 Between individual terminals and bracket: 10MΩ MIN.
2-4 絶縁強度 Dielectric strength	端子-端子間電圧A. C. 50V1分間又は、A. C. 60V2秒間印加する。 (リーク電流1mA) A voltage of 50V A. C. shall be applied for 1min or a voltage of 60V A. C. shall be applied for 2sec between individual terminals and bracket. (Leak current:1mA)	端子-アーク・絶縁破壊等なし Without damage to parts, arcing or breakdown.


注記:
Note:
軸・スイッチ端子間は絶縁されております。
Shaft is insulated from switch terminal.



3. 機械的特性 Mechanical characteristics

項目 Item	条件 Conditions	規格 Specifications
3-1 スイッチ回路・接点構造 Contact arrangement		接点構造 (PUSH ON) S. P. S. I. (Push on)
3-2 スイッチ寿命 Switching		0. 5 ^{±0.05} mm
3-3 スイッチ作動力 Switch operation force		3 ^{±1.5} N


4. 耐久特性 Endurance characteristics.

項目 Item	条件 Conditions	規格 Specifications
4-1 寿命特性 Operating life	定格電圧・電流で500回動作又は20,000回動作を行なう。 The shaft of switch shall be 20,000 times at a speed of 500times per hour without electrical load. However, an interim measurement shall be made immediately after 5,000 times. (Strength of shaft 10N max.)	寿命試験: 200mΩ以下 その後も、絶縁抵抗を測定すること。 Switch contact resistance: 200mΩ MAX. Except above items, specifications in clause 2.2-4, and 3.1-3 shall be satisfied.


SYMB	DATE	APPD	CHKD	DSBD	 ALPS ELECTRIC CO., LTD.	
		APPD.	CHKD.	DSBD.	TITLE	
		APR. 22 '99	APR. 22 '99	APR. 22 '99	12形回転スイッチ	
		K. ITO			Y. KANZAKI	H. MIURA
					DOCUMENT NO.	
					F3133954M	
					(9/9)	

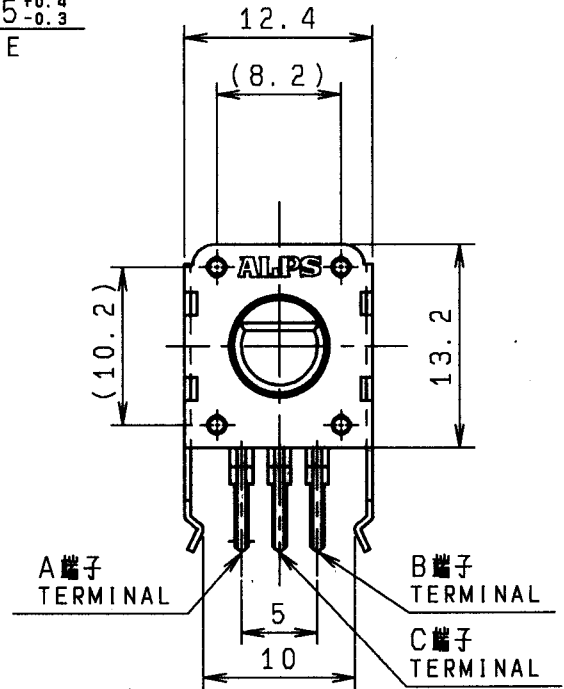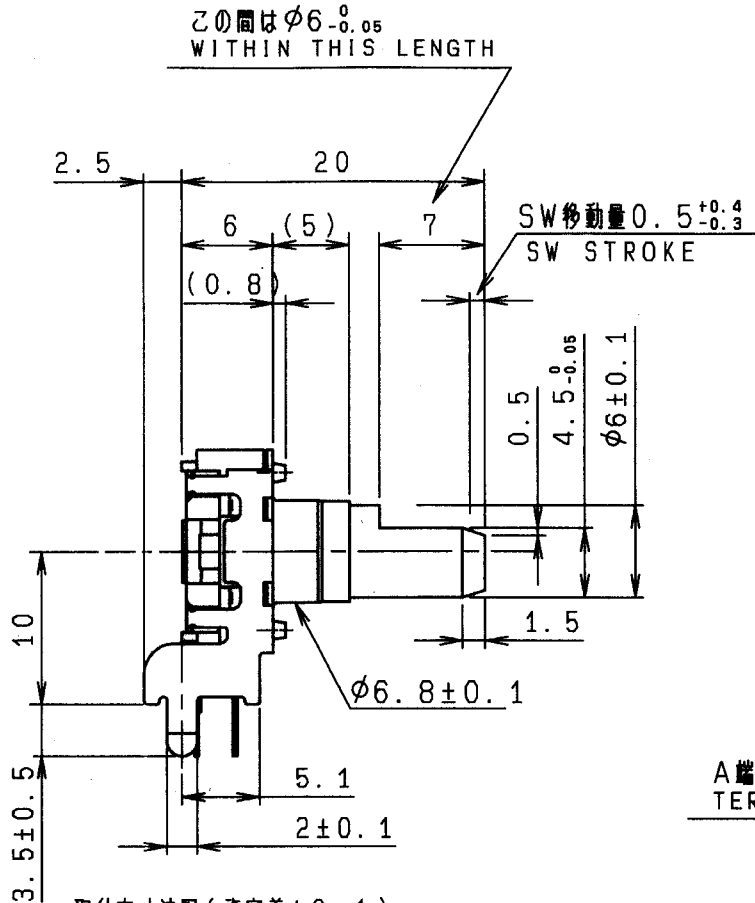

取付穴寸法図 (許容差 ± 0.1)
*挿入側より見た図
P. W. B. MOUNTING DETAIL
(TOLERANCE ± 0.1)
VIEWED FROM MOUNTING SIDE

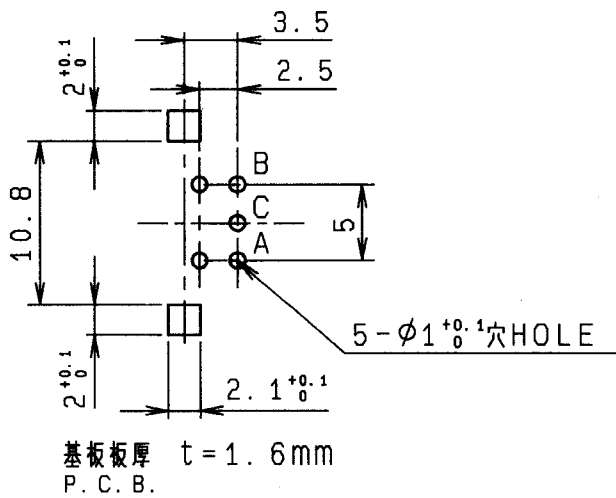

端子先端詳細図 (10:1)
DETAIL OF TERMINALS



指定なき部分の許容差 TOLERANCES UNLESS OTHERWISE SPEC	
$L \leq 10$	± 0.3
$10 < L < 100$	± 0.5
$100 \leq L$	± 0.8
角度 ANGULAR DIMENSION	$\pm 5^\circ$

			24バルス SHAFT COLOR:BLACK		L=20 立形 クリック付
PART NO.	NAME	MATERIAL NAME / CODE	FINISH		
ALPS ELECTRIC CO., LTD.					
		DSGD. 七ツケ42 H. MIURA '95-12-08	SCALE 2:1		
		CHKD. M. ENDOU '95-12-08		TITLE 12形 PUSH ON SW付 薄形エンコーダー	
		APPD. S. MIZOBUTI '95-12-08	UNIT mm	DOCUMENT NO. LE21240A	
SYMB	DATE	APPD	CHKD	DSGD	