


151-573

Rocker Switches-Double Pole 10A or 16A 250V

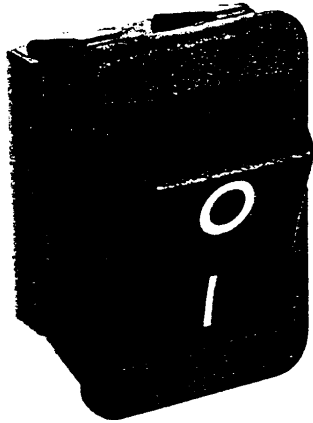

C1550AB with 0 1 printing

To create a catalogue number:

Refer to the 4 columns below, shaded in grey, starting with "Terminal Code."

Examples of 7 digit catalogue numbers are given under the illustrations opposite. Then describe in words:

Rocker colour, Body colour, Matt or gloss finish, Rocker printing, Voltage (for illuminated units, 100/125V marked 110V, or 200/250V marked 230V).

Illuminated switches and indicators are available with red, amber, green or clear lenses/rockers.

Switches have 3mm gap except where marked μ . All switches suitable for class II appliances.

For High in-rush versions (1300 Series) see pages 22 and 23.

Full technical data for this product range will be found on pages 24 and 25.



14 Series: 10(3)A 250Vac T125
UL CSA 10A 250Vac
1450 On Off only:
10(4)A 250Vac T125 +++


15 Series: 16(4)A 240Vac T85
UL CSA 16A 250Vac Non Ind.
UL 250Vac 1hp 125Vac 1/2hp
UL file no. E45221

TERMINAL CODE

SWITCH FUNCTION CODE

ROCKER CODE


C




6.3 x 0.8
Tab terminal

10(3)A

16(4)A



A Softline Matt only




1450 \blacklozenge
10(4)A +++

1550 \blacklozenge

ON/OFF



V Curved




1451

1551
HP Rating N/A

ON/OFF
momen on



H



4.8 x 0.8
Tab terminal


1452

1552
HP Rating N/A

ON/OFF
momen off




N Slimline sub-panel rocker
Matt only




1453 \blacklozenge

1553 \blacklozenge

ON/OFF
with light



K



2.8 x 0.8
Solder tag


1461 μ

1561 μ
HP Rating N/A

2 position
change-over
momentary



P Illuminated window Matt only



1470 \blacklozenge μ

13.5A ONLY
1570 \blacklozenge μ
250V 1/2HP
125V 1/4HP

3 position
change-over
centre off



X Softline 2 colour Rocker Matt only




1471 μ

13.5A ONLY
1571 μ
HP Rating N/A

3 position change
-over centre off
momen 1 side



T



Solder tag

1472 μ

13.5A ONLY
1572 μ
HP Rating N/A

3 position change
-over centre off
momen 2 sides



LENS CODE


A Softline Matt only



μ 1484


Further circuits available on request. (5A rated)

3 position
selective
OFF/A/A+B







C1550AB 6.3 terminal, on/off switch, A rocker, B body.



C1553AB 6.3 terminal, illuminated on/off switch, A rocker, B body.



H1453PT 4.8 terminal, on/off switch, P rocker with illuminated window, T body.



C0480AT 6.3 terminal, indicator light, A lens, T body.



C1470AB 6.3 terminal, 3 position change-over switch, A rocker, B body.



C1550NA 6.3 terminal, on/off switch, N rocker, A body. Showing mounting method.



BODY CODE

DIMENSIONS



Panel cut-outs

Flanges



A





B





D






L



Q



T



Terminal spacing
Poles 10.2 between centres

For snap-in fixing, panel holes must be punched in the same direction as the unit is to be fitted. Panel thickness between:


- A, Q** 0.75 and 3.3mm.
- L, B, T** 0.75 and 2.5mm.
- D** 0.75 and 1.2mm.

Moisture resistant switches

Certain switches can be assembled with a special internal barrier to give improved resistance against the ingress of water or dust. Quote rocker code B (Same shape as rocker code A). This does not render the switch watertight. Applications should be discussed with Arcoelectric

Moisture resistant covers.

Can be supplied to fit L or T bodies. Add suffix G to catalogue number, e.g. C1550AL-G. These covers snap on to the switch body and provide sealing to IP65. A washer W44 for improved switch/panel sealing is available.



NOTE

Most switches listed on this page can also be supplied with single pole