


## MOS FET Relays

### G3VM-351H

**Slim, 2.1-mm High Relay Incorporating a MOS FET Optically Coupled with an Infrared LED in a Miniature, Flat SOP Package**

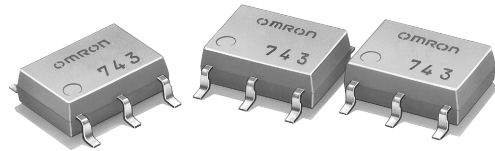

- Upgraded G3VM-S3 Series.
- Continuous load current of 110 mA.
- Dielectric strength of 1,500 Vrms between I/O.

**NEW**

### Application Examples

- Broadband systems
- Measurement devices
- Data loggers
- Amusement machines

**Note:** The actual product is marked differently from the image shown here.


### List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NO	Surface-mounting terminals	350 VAC	G3VM-351H	75	---
			G3VM-351H(TR)	---	2,500


### Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

G3VM-351H




**Note:** The actual product is marked differently from the image shown

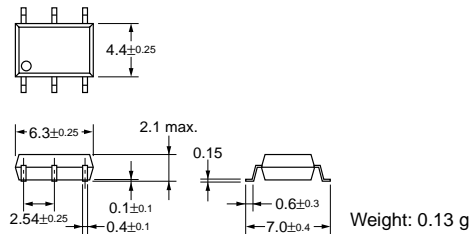


### Terminal Arrangement/Internal Connections (Top View)

G3VM-351H



### Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-351H




### Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rating	Unit	Measurement Conditions		
Input	LED forward current	$I_F$	50	mA		
	Repetitive peak LED forward current	$I_{FP}$	1	A	100 $\mu$ s pulses, 100 pps	
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.5	mA/°C	Ta $\geq$ 25°C	
	LED reverse voltage	$V_R$	5	V		
	Connection temperature	$T_j$	125	°C		
Output	Output dielectric strength	$V_{OFF}$	350	V		
	Continuous load current	Connection A	$I_O$	110	mA	
		Connection B		110		
		Connection C		220		
	ON current reduction rate	Connection A	$\Delta I_{ON}/^\circ\text{C}$	-1.1	mA/°C	Ta $\geq$ 25°C
		Connection B		-1.1		
Connection C			-2.2			
Connection temperature	$T_j$	125	°C			
Dielectric strength between input and output (See note 1.)		$V_{I-O}$	1,500	Vrms	AC for 1 min	
Operating temperature		$T_a$	-40 to +85	°C	With no icing or condensation	
Storage temperature		$T_{stg}$	-55 to +125	°C	With no icing or condensation	
Soldering temperature (10 s)		---	260	°C	10 s	

**Note:** 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


Connection Diagram

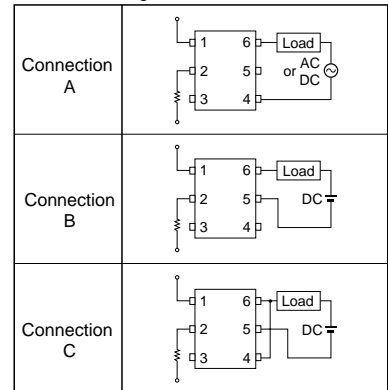

### Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions		
Input	LED forward voltage	$V_F$	1.0	1.15	1.3	V	$I_F = 10$ mA	
	Reverse current	$I_R$	---	---	10	$\mu$ A	$V_R = 5$ V	
	Capacity between terminals	$C_T$	---	30	---	pF	$V = 0, f = 1$ MHz	
	Trigger LED forward current	$I_{FT}$	---	1	3	mA	$I_O = 110$ mA	
Output	Maximum resistance with output ON	Connection A	$R_{ON}$	---	25	35	$\Omega$	$I_F = 5$ mA, $I_O = 110$ mA, $t < 1$ s
			---	35	50	$\Omega$	$I_F = 5$ mA, $I_O = 110$ mA	
			Connection B	---	28	40	$\Omega$	$I_F = 5$ mA, $I_O = 110$ mA
	Connection C	---	14	20	$\Omega$	$I_F = 5$ mA, $I_O = 220$ mA		
	Current leakage when the relay is open	$I_{LEAK}$	---	---	1.0	$\mu$ A	$V_{OFF} = 350$ V	
Capacity between I/O terminals	$C_{I-O}$	---	0.8	---	pF	$f = 1$ MHz, $V_s = 0$ V		
Insulation resistance	$R_{I-O}$	1,000	---	---	M $\Omega$	$V_{I-O} = 500$ VDC, $RoH \leq 60\%$		
Turn-ON time	tON	---	0.3	1.0	ms	$I_F = 5$ mA, $R_L = 200 \Omega$ , $V_{DD} = 20$ V (See note 2.)		
Turn-OFF time	tOFF	---	0.1	1.0	ms			

**Note:** 2. Turn-ON and Turn-OFF Times



### Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Output dielectric strength	$V_{DD}$	---	---	280	V
Operating LED forward current	$I_F$	5	10	25	mA
Continuous load current	$I_O$	---	---	100	mA
Operating temperature	$T_a$	-20	---	65	°C

### Engineering Data

#### Load Current vs. Ambient Temperature

G3VM-351H

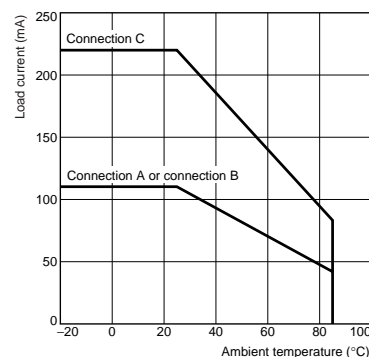

### Safety Precautions

Refer to page 6 for precautions common to all G3VM models.