

Power line chokes

Current-compensated ring core double chokes 250 V AC, 0.3 ... 2 A, 1.1 ... 22 mH

Series/Type: B82720A/K

Date: March 2008



Power line chokes B82720A/K

Current-compensated ring core double chokes

Rated voltage 250 V AC
Rated current 0.3 A to 2 A
Rated inductance 1.1 mH to 22 mH

Construction

- Current-compensated ring core double choke
- Ferrite core
- Polycarbonate case (UL 94 V-0)
- Polyurethane potting (UL 94 V-0)
- Sector winding

Features

- High resonance frequency due to special winding technique
- Approx. 1% stray inductance for symmetrical interference suppression
- Suitable for wave soldering
- Design complies with EN 60938-2 (VDE 0565-2)
- RoHS-compatible

Applications

- Suppression of common-mode interferences
- Compact electronic ballasts in lamps
- Compact switch-mode power applications

Terminals

- Base material CuNi18Zn20
- Layer composition Ni, Sn
- Hot-dipped
- Pins 0.5×0.5 (mm), \emptyset 0.6 mm
- Pins in the lead spacing 10×7.5 (mm) or 10×10 (mm)

Marking

Manufacturer, ordering code, rated inductance, rated current, graphic symbol, rated voltage, date of manufacture (YYWWD)

Delivery mode

Cardboard box



B82720A



B82720K




Power line chokes B82720A/K


Current-compensated ring core double chokes

Dimensional drawings and pin configurations

Horizontal version (B82720A)

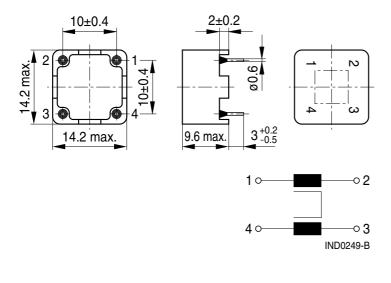

Vertical version (B82720K)



Dimensions in mm

Technical data and measuring conditions

250 V AC (50/60 Hz)		
1500 V AC, 2 s (line/line)		
40 °C		
Referred to 50 Hz and rated temperature		
Measured with Agilent 4284A at 10 kHz, 0.1 mA, 20 °C Inductance is specified per winding.		
-30/+50% at 20 °C		
<10% at DC magnetic bias with I _R , 20 °C		
Measured with Agilent 4284A at 10 kHz, 5 mA, 20 °C, typical values		
Measured at 20 °C, typical values, specified per winding		
Sn96.5Ag3.0Cu0.5: (245 ± 5) °C, (3 ± 0.3) s Wetting of soldering area $\geq 95\%$ (to IEC 60068-2-20, test Ta)		
(260 ±5) °C, (10 ±1) s (to IEC 60068-2-20, test Tb)		
40/125/56 (to IEC 60068-1)		
–25 °C +40 °C, ≤ 75% RH		
Approx. 2.5 g		



Power line chokes B82720A/K


Current-compensated ring core double chokes

Characteristics and ordering codes


I _R	L _R	L _{stray,typ}	R _{typ}	T _R	Ordering code	
Α	mH	μΗ	mΩ	°C	Horizontal version	Vertical version
0.3	22	130	1500	40	B82720A2301N042	B82720K2301N042
0.3	12	80	1100	40	B82720A2301N040	B82720K2301N040
0.6	4.4	30	400	40	B82720A2601N040	B82720K2601N040
1.0	3.0	20	220	40	B82720A2102N040	B82720K2102N040
1.5	1.6	10	110	40	B82720A2152N040	B82720K2152N040
2.0	1.1	6	65	40	B82720A2202N040	B82720K2202N040

Impedance |Z| versus frequency f

measured with windings in parallel at 20 $^{\circ}$ C, typical values

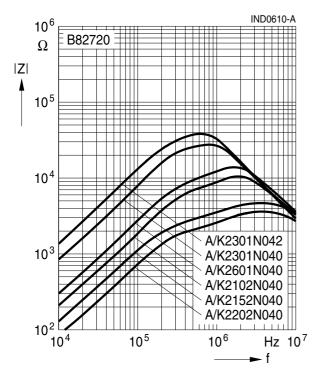

Current derating I_{op}/I_R versus ambient temperature T_A

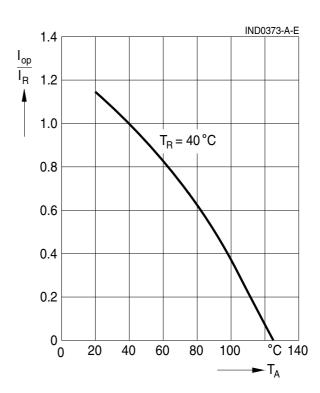



Cautions and warnings

- Please note the recommendations in our Inductors data book (latest edition) and in the data sheets.
 - Particular attention should be paid to the derating curves given there.
 - The soldering conditions should also be observed. Temperatures quoted in relation to wave soldering refer to the pin, not the housing.
- If the components are to be washed varnished it is necessary to check whether the washing varnish agent that is used has a negative effect on the wire insulation, any plastics that are used, or on glued joints. In particular, it is possible for washing varnish agent residues to have a negative effect in the long-term on wire insulation.
- The following points must be observed if the components are potted in customer applications:
 - Many potting materials shrink as they harden. They therefore exert a pressure on the plastic housing or core. This pressure can have a deleterious effect on electrical properties, and in extreme cases can damage the core or plastic housing mechanically.
 - It is necessary to check whether the potting material used attacks or destroys the wire insulation, plastics or glue.
 - The effect of the potting material can change the high-frequency behaviour of the components.
- Ferrites are sensitive to direct impact. This can cause the core material to flake, or lead to breakage of the core.
- Even for customer-specific products, conclusive validation of the component in the circuit can only be carried out by the customer.



Important notes

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application.
 - As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed guestions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.
 - We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available.
 - The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
- 6. Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
- 7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSSP, CTVS, DSSP, MiniBlue, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseMod, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.