PCB Power Relay - G8P

Compact, Low-cost 30-A Power Relay for PC Board or Panelmounted Applications

- ROHS compliant.
- Compact, yet capable of switching up to 30-A loads.
- Complies with UL873 and UL508 column A spacings (%" through air, ¼" over surface).
- UL Class F insulation standard.
- Withstands of up to 6,000 V under 1.250 µs impulse wave or ring wave.
- A selection of contact forms: SPDT and SPST-NO.
- Quick-connect terminals versions ideal for PC board and panel mounting.
- Flanged mounting available.
- Ideal for home and industrial appliances, HVAC (heating, ventilating, and air conditioning), and many other applications.





Ordering Information -

Classification		Contact Form	Enclosure Rating		
Mounting style	Terminals		Opem	Unsealed	Fully Sealed
PCB mounting	PCB	SPST-NO	G8P-1AP	G8P-1A2P	G8P-1A4P
		SPDT	G8P-1CP	G8P-1C2P	G8P-1C4P
	Quick-connect	SPST-NO	G8P-1ATP	G8P-1A2TP	G8P-1A4TP
		SPDT	G8P-1CTP	G8P-1C2TP	G8P-1C4TP
Flanged mounting	Quick-connect	SPST-NO	_	G8P-1A2T-F	_
		SPDT	_	G8P-1C2T-F	_

Note: 1. The contacts described above are AgCdO.

When ordering, add the rated coil voltage to the model number Example: G8P-1AP 12 VDC

Rated coil voltage

Model Number Legend

G8P - _ _ _ _ _ _ _ _ _ _ _ _ _ VDC

Number of Poles
 1: 1 pole

2. Contact Form

A: SPST-NO C: SPDT 3. Enclosure Ratings

None: Open 2: Unsealed 4: Fully-Sealed

4. Terminals

P: Straight PCB for contacts and coil
T: Quick-connect (#250 terminals for

T: Quick-connect (#250 terminals for contacts and #187 terminals for coil)
TP: Quick-connect (#250 terminals) and

straight PCB for contacts,

and straight PCB for coil

5. Mounting

None: PCB mounting
F: Flanged mounting

6. Rated Coil Voltage

5, 9, 12, 24, 48, 110

Other rated coil voltages available.

PCB Power Relay – G8P

Specifications -

■ Coil Ratings

Rated voltage	5 VDC	9 VDC	12 VDC	24 VDC	48 VDC	110 VDC
Rated current	185 mA	93 mA	77 mA	36 mA	19 mA	9 mA
Coil resistance	27 Ω	97 Ω	155 Ω	660 Ω	2,480 Ω	12,400 Ω
Must operate voltage	75% max. of rated voltage					
Must release voltage	10% min. of rated voltage					
Max. voltage	120% of rated voltage					
Power consumption Approx. 900 mW						

Note: The rated current and coil resistance are measured at a coil temperature of 23°C with tolerances of ±10%.

■ Contact Ratings

Item	SPST-NO	SPDT	
Load	Resistive load ($\cos \varphi = 1$)		
Rated load	30 A at 250 VAC; 20 A at 28 VDC	20 A/10 A* at 250 VAC; 20 A/10 A* at 28 VDC	
Contact material	AgSnIn		
Rated carry current	30 A	20 A/10 A*	
Max. switching voltage 250 VAC, 28 VDC			
Max. switching current	AC: 30 A, DC: 20 A	AC: 20 A/10 A, DC: 20 A/10 A*	
Max. switching capacity	7,500 VA, 560 W	5,000/2,500 VA, 560/280 W*	

Note: *NO contact/NC contact.

■ Characteristics

Contact resistance		100 mΩ max.		
Operate time		15 ms max.		
Release time		10 ms max.		
Max. Operating Frequency		Mechanical: 18,000 operations/hr Electrical: 360 operations/hr (under rated load)		
Insulation resistance		100 MΩ min. (at 500 VDC)		
Dielectric strength		2,500 VAC, 50/60 Hz for 1 min between coil and contacts 1,500 VAC, 50/60 Hz for 1 min between contacts of same polarity		
Insulation Creepage (Typ) Distance Clearance (Typ)		4.08 mm (min.)		
		1.6 mm (min.)		
Tracking Resistance	e (CTI)	175 V		
Impulse withstand	voltage	6,000 V (1.2/50 µs) between coil and contacts		
Vibration resistance		Destruction: 10 to 55 to 10 Hz, 0.825-mm single amplitude (1.65-mm double amplitude) for 2 hours Malfunction: 10 to 55 to 10 Hz, 0.825-mm single amplitude (1.65-mm double amplitude) for 5 minutes		
Shock resistance		Destruction: 1,000 m/s² (approx. 100G) Malfunction: 100 m/s² (approx. 10G)		
Endurance		Mechanical: 10,000,000 operation min. (at 18,000 operations/hr) Electrical: 100,000 operations min. (at rated load)		
Ambient temperature		Operating: -55°C to 105°C (with no icing)		
Ambient humidity		Operating: 5% to 85%		
Weight		G8P-1CP: Approx. 21 g, G8P-1CTP: Approx. 24 g G8P-1C4P: Approx. 28 g, G8P-1C4TP: Approx. 31 g		


■ Approved Standards UL (File No. E41643)/CSA (File No. LR34815-101) EN 61810-1 (VDE Reg No. 40004714)

Туре	Contact form	Coil ratings	Contact ratings
G8P-1A	SPST-NO	5 to 110 VDC	30 A, 277 VAC (G.P./Res.) 30 A, 250 VAC, 100 k ops. (Res.) 20 A, 120-240 VAC, 70°C, 100 k ops. (G.P./Res.) 20 A, 28 VDC (Res.) 20 A, 240 VAC, 105°C, 100 k ops. (Res.) 1 hp, 125-250 VAC 2 hp, 250 VAC A300 Pilot Duty 12FLA/72LRA, 250 VAC, 100 k ops. 20 FLA/96 LRA, 125 VAC, 100 k ops. 5 A, 250 VAC (Tungsten) 20 A, 120-277 VAC (Ballast) 25A, 250 VAC
G8P-1C	SPDT	5 to 110 VDC	30 A/30 A, 250 VAC (Res.) 30 A/30 A, 277 VAC, 40°C, 100 k opns (NO) and 50 k opns (NC) 20 A/15 A, 120-240 VAC, 105°C, 100 k ops. (Res.) 20 A/10 A, 120-240 VAC, 70°C, 100 k ops. (G.P./Res.) 20 A/10 A, 28 VDC (Res.) 1/2 hp/ 1/2 hp, 125 VAC, 100 k ops. 2 hp/ 1/2 hp, 250 VAC 1 hp/ 1/4 hp, 125 VAC B150 Pilot Duty 5 A/3 A, 250 VAC (Tungsten) 6 A/3 A, 277 VAC (Ballast)

Engineering Data -


Maximum Switching capacity

SPST-NO




Endurance

SPST-NO




SPDT



Rated operating voltage (V)

SPDT




Dimensions

Note: All units are in millimetres unless otherwise indicated.

■ Open Types

G8P-1CP/1AP



Max. 28.5 Max. 17.4 Typ. 16.9


2.5

Terminal Arrangement/Internal Connections (Bottom View)






Mounting Holes (Bottom View)



Note: Pin #4 is omitted on G8P-1AP.


G8P-1CTP/1ATP

4.4±0.5




Terminal Arrangement/Internal Connections (Bottom View)






Mounting Holes (Bottom View)




Note: Pin #4 is omitted on G8P-1ATP

PCB Power Relay - G8P

■ Fully-Sealed Types/Unsealed Types

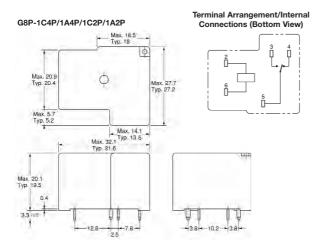


Mounting Holes (Bottom View)




Note: Pin #4 is omitted on G8P-1A4P/1A2P

G8P-1C4TP/1A4TP/1C2TP/1A2TP

Terminal Arrangement/Internal Connections (Bottom View)

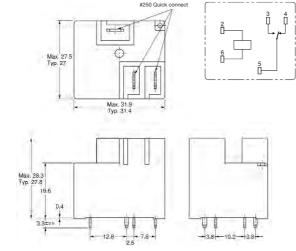


Mounting Holes (Bottom View)



Note: Pin #4 is omitted on G8P-1A4TP/1A2TP

PCB Power Relay - G8P

■ Flange Mounting Types

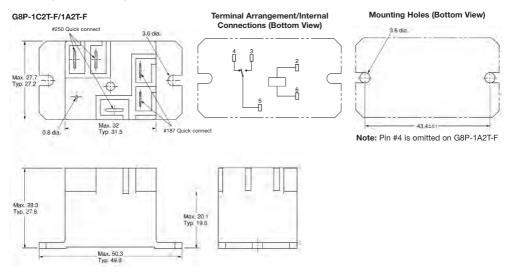

Note: Allow air circulation within the sealed type G8P by removing the knock off nib from the cover after soldering and cleaning is complete.

Precautions -

Sealed Relays

Remove the vent hole tape seal from the cover after all soldering and cleaning have been completed to allow air circulation within sealed G8P Relays.