

High Luminous Efficacy Green
Power LedFlex™ Emitter
LZ4-00G115



Key Features

- High Luminous Efficacy 15W Green LED
- Unique package design with ceramic substrate, integrated glass lens and Flex PCB
- New industry standard for Lumen Maintenance (> 90% at 100,000 Hours)
- Extremely low Thermal Resistance (2.6°C/W)
- Isolated thermal path - electrical connections on Flex PCB
- Mount directly to heatsink - MCPCB not required
- Industry's highest Luminous Flux density
- High ESD protection (> 8 kV HBM)
- JEDEC Level 2 Moisture Sensitivity Level
- Lead (Pb) free and RoHS compliant

Typical Applications

- Architectural lighting
- Automotive and Marine lighting
- Stage and Studio lighting
- Beacons and Buoys
- Airfield lighting and signs
- RGB fixtures

Description

LedEngin's LZ4-00G115 Green Power LedFlex™ emitter is capable of 15W power dissipation and provides exceptional luminous flux density. The LZ4-00G115 offers ultimate design flexibility with separate electrical and thermal paths. The thermal contact can be mounted directly to a heatsink, eliminating the requirement for a MCPCB. The Anode and Cathode contacts are remotely located on the Flex PCB, allowing for connection versatility and unobstructed access to the optics. LedEngin's patent-pending design has unparalleled thermal and optical performance. The high quality materials used in the package are chosen to optimize light output and minimize stresses which results in monumental reliability and lumen maintenance.

Table of Contents

| | |
|--|----|
| Product Nomenclature | 3 |
| IPC/JEDEC Moisture Sensitivity | 3 |
| Average Lumen Maintenance Projections | 3 |
| Luminous Flux Binning. | 4 |
| Dominant Wavelength Binning | 4 |
| Forward Voltage Binning | 4 |
| Absolute Maximum Ratings | 5 |
| Optical Characteristics | 5 |
| Electrical Characteristics | 5 |
| Mechanical Dimensions | 6 |
| Typical Radiation Pattern | 7 |
| Typical Relative Spectral Power Distribution | 7 |
| Typical Relative Light Output | 8 |
| Typical Relative Light Output over Temperature | 8 |
| Typical Forward Current Characteristics | 9 |
| Current Derating Curves | 9 |
| Company Information | 10 |

Product Nomenclature

The LZ Series part number designation is defined as follows:



Luminous Flux Bins

Table 2:

| Bin Code | Minimum Luminous Flux (Φ_V) @ $I_F = 1000\text{mA}$ ^[1,2] (lm) | Maximum Luminous Flux (Φ_V) @ $I_F = 1000\text{mA}$ ^[1,2] (lm) | Typical Luminous Flux (Φ_V) @ $I_F = 1500\text{mA}$ ^[2] (lm) |
|----------|---|---|---|
| S | 356 | 445 | 526 |
| T | 445 | 556 | 622 |
| U | 556 | 695 | 777 |

Notes for Table 2:

1. Luminous flux performance guaranteed within published operating conditions. LedEngin maintains a tolerance of $\pm 10\%$ on flux measurements.
2. Future products will have even higher levels of luminous flux performance. Contact LedEngin Sales for updated information.

Dominant Wavelength Bins

Table 3:

| Bin Code | Minimum Dominant Wavelength (λ_D) @ $I_F = 1000\text{mA}$ ^[1,2] (nm) | Maximum Dominant Wavelength (λ_D) @ $I_F = 1000\text{mA}$ ^[1,2] (nm) |
|----------|--|--|
| G2 | 520 | 525 |
| G3 | 525 | 530 |
| G4 | 530 | 535 |

Notes for Table 3:

1. Dominant wavelength is derived from the CIE 1931 Chromaticity Diagram and represents the perceived hue.
2. LedEngin maintains a tolerance of $\pm 0.5\text{nm}$ on dominant wavelength measurements.

Forward Voltage Bins

Table 4:

| Bin Code | Minimum Forward Voltage (V_F) @ $I_F = 1000\text{mA}$ ^[1] (V) | Maximum Forward Voltage (V_F) @ $I_F = 1000\text{mA}$ ^[1] (V) |
|----------|---|---|
| F | 12.80 | 13.76 |
| G | 13.76 | 14.72 |
| H | 14.72 | 15.68 |
| J | 15.68 | 16.64 |

Notes for Table 4:

1. LedEngin maintains a tolerance of $\pm 0.04\text{V}$ for forward voltage measurements.

Absolute Maximum Ratings

Table 5:

| Parameter | Symbol | Value | Unit |
|--|-----------|---|------|
| DC Forward Current ^[1] | I_F | 1500 | mA |
| Peak Pulsed Forward Current ^[2] | I_{FP} | 2000 | mA |
| Reverse Voltage | V_R | See Note 3 | V |
| Storage Temperature | T_{stg} | -40 ~ +150 | °C |
| Junction Temperature | T_J | 150 | °C |
| Soldering Temperature | T_{sol} | 260 | °C |
| ESD Sensitivity ^[4] | | > 8,000 V HBM Class 3B JESD22-A114-D | |

Notes for Table 5:

- Maximum DC forward current is determined by the overall thermal resistance and ambient temperature. Follow the curves in Figure 7 for current derating.
- Pulse forward current conditions: Pulse Width \leq 10msec and Duty Cycle \leq 10%.
- LEDs are not designed to be reverse biased.
- LedEngin recommends taking reasonable precautions towards possible ESD damages and handling the LZ4-00G115 in an electrostatic protected area (EPA). An EPA may be adequately protected by ESD controls as outlined in ANSI/ESD S6.1.

Optical Characteristics @ $T_C = 25^\circ\text{C}$

Table 6:

| Parameter | Symbol | Typical | Unit |
|--|-----------------|---------|---------|
| Luminous Flux (@ $I_F = 1000\text{mA}$) | Φ_V | 532 | lm |
| Luminous Flux (@ $I_F = 1500\text{mA}$) | Φ_V | 661 | lm |
| Dominant Wavelength | λ_D | 525 | nm |
| Viewing Angle ^[1] | $2\Theta_{1/2}$ | 95 | Degrees |
| Total Included Angle ^[2] | $\Theta_{0.9V}$ | 115 | Degrees |

Notes for Table 6:

- Viewing Angle is the off axis angle from emitter centerline where the luminous intensity is $\frac{1}{2}$ of the peak value.
- Total Included Angle is the total angle that includes 90% of the total luminous flux.

Electrical Characteristics @ $T_C = 25^\circ\text{C}$

Table 7:

| Parameter | Symbol | Typical | Unit |
|--|---------------------------|---------|-------|
| Forward Voltage (@ $I_F = 1000\text{mA}$) | V_F | 14.5 | V |
| Forward Voltage (@ $I_F = 1500\text{mA}$) | V_F | 15.4 | V |
| Temperature Coefficient of Forward Voltage | $\Delta V_F / \Delta T_J$ | -7.4 | mV/°C |
| Thermal Resistance (Junction to Case) | $R\Theta_{J-C}$ | 2.6 | °C/W |

Mechanical Dimensions (mm)

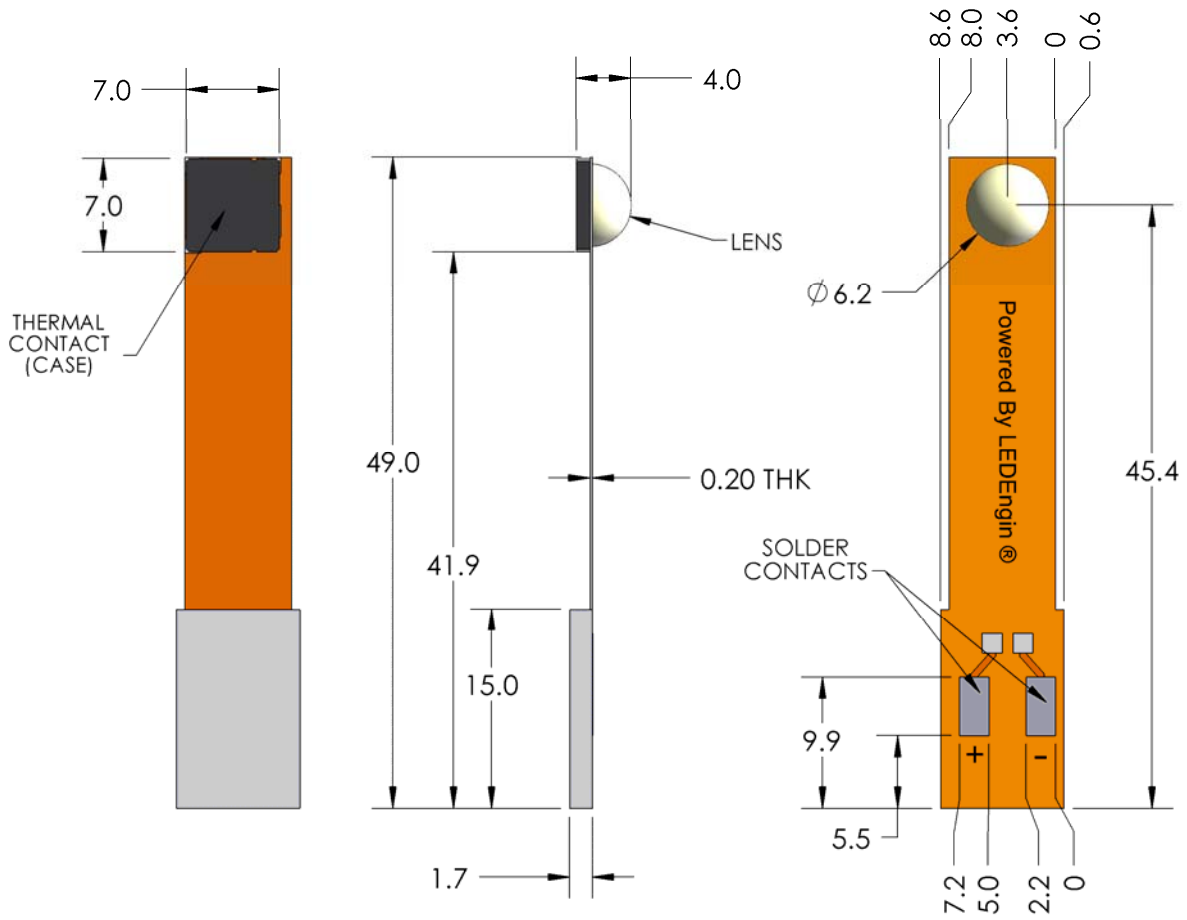


Figure 1: Package outline drawing.

Notes for Figure 1:

1. Unless otherwise noted, the tolerance = ± 0.20 mm.
2. Solder contact pads on Flex PCB are labeled "+" for Anode and "-" for Cathode.
3. LedEngin recommends using thermally conductive tapes or adhesives when attaching Thermal Contact to a heat sink.

Typical Radiation Pattern

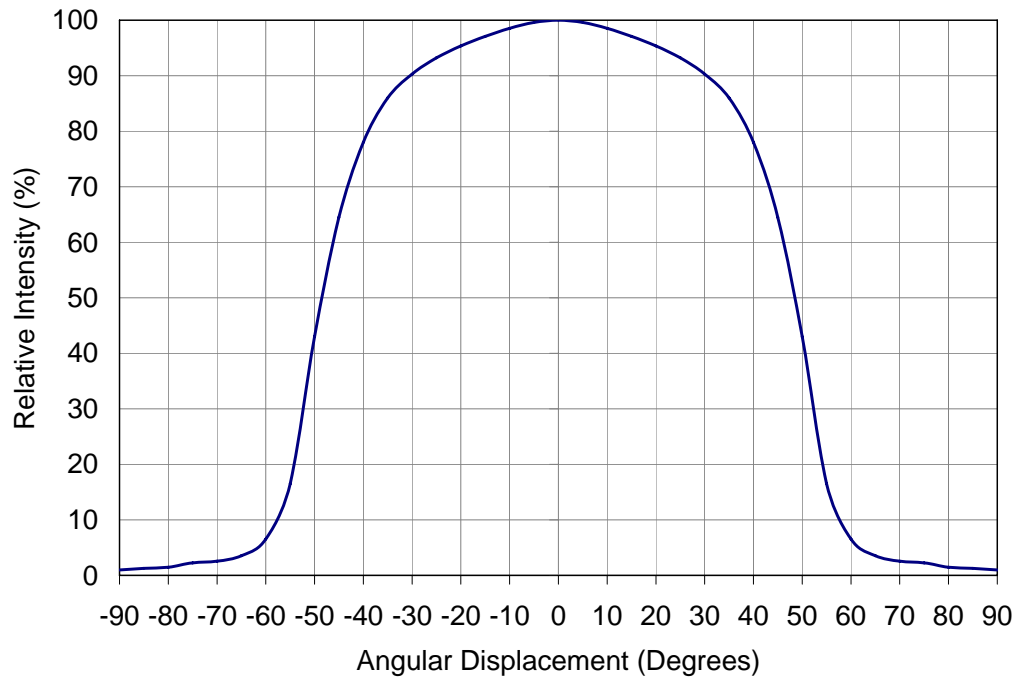


Figure 2: Typical representative spatial radiation pattern.

Typical Relative Spectral Power Distribution

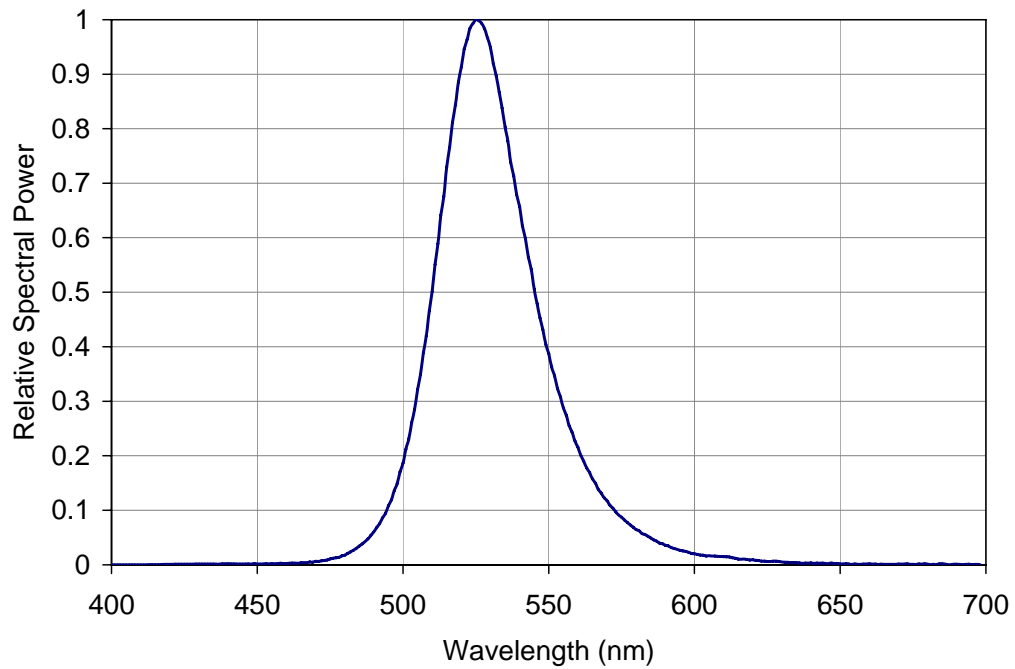


Figure 3: Relative spectral power vs. wavelength @ $T_c = 25^\circ\text{C}$.

Typical Relative Light Output

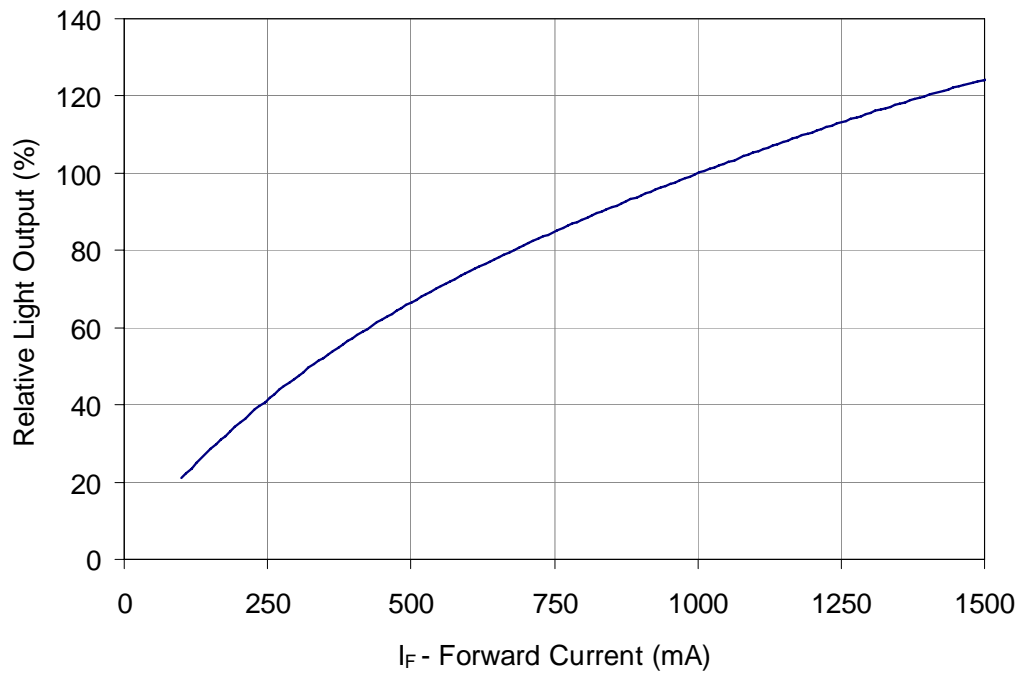


Figure 4: Typical relative light output vs. forward current @ T_C = 25°C.

Typical Relative Light Output over Temperature

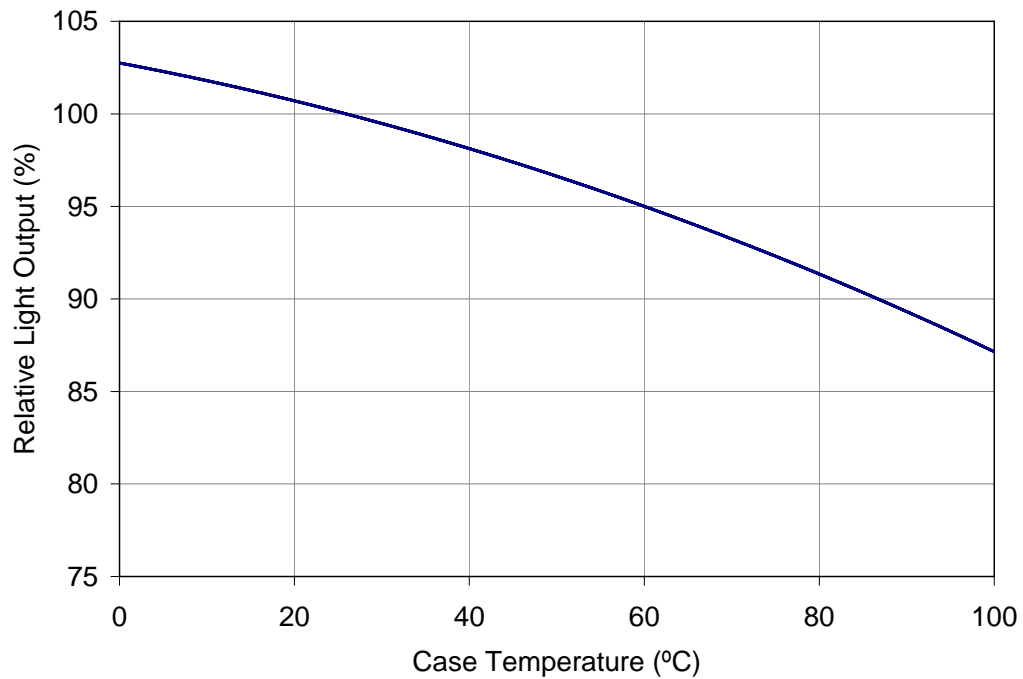


Figure 5: Typical relative light output vs. case temperature.

Typical Forward Current Characteristics

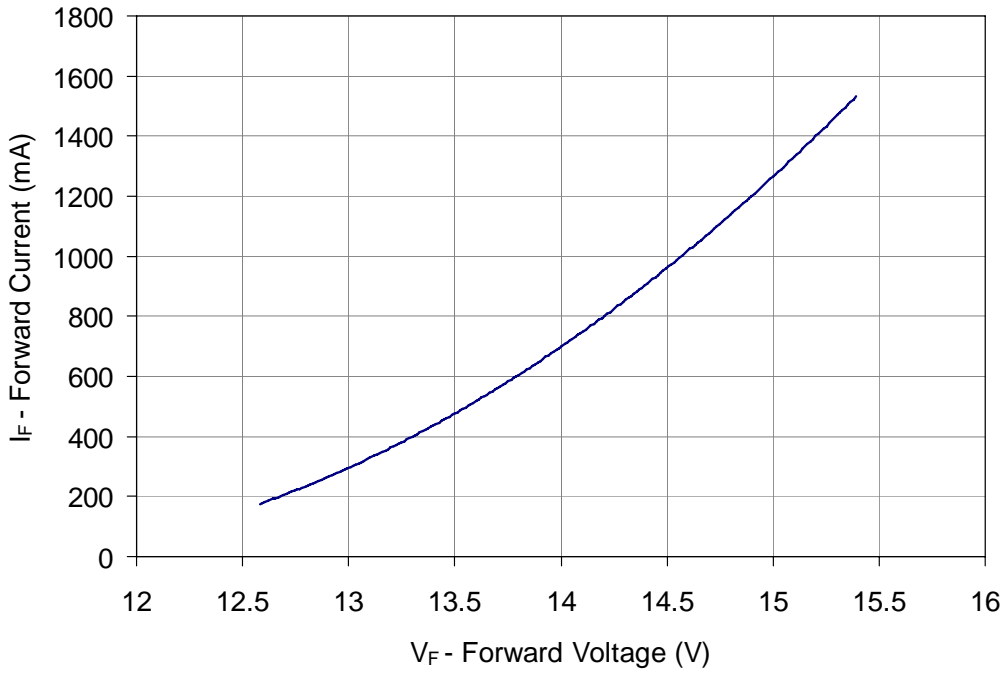


Figure 6: Typical forward current vs. forward voltage @ $T_C = 25^\circ\text{C}$.

Current Derating

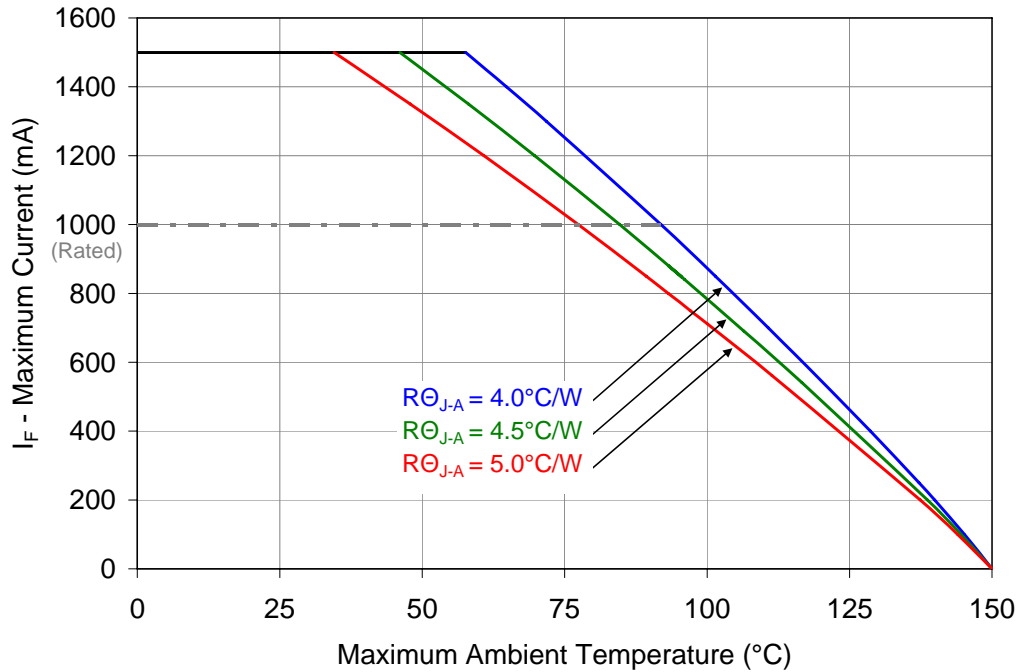


Figure 7: Maximum forward current vs. ambient temperature based on $T_{J(MAX)} = 150^\circ\text{C}$.

Notes for Figure 7:

1. $R\theta_{J-C}$ [Junction to Case Thermal Resistance] for the LZ4-00G115 is typically 2.6°C/W .
2. $R\theta_{J-A}$ [Junction to Ambient Thermal Resistance] = $R\theta_{J-C} + R\theta_{C-A}$ [Case to Ambient Thermal Resistance].

Company Information

The LZ4-00G115 Power LedFlex™ emitter is developed, manufactured, and marketed by LedEngin, Inc., located in Santa Clara, CA. LedEngin is a global market leader in advanced high-power LED emitters and light-source modules. LedEngin provides total solutions from 3W to 15W in single packages with ultra-small footprints in all colors from White, Dental Blue, Blue, Green, Red, RGB, and UV. LedEngin supports customers to generate solid-state lighting designs that conserve natural resources. LedEngin is focused on differentiated Ultra High-Brightness LED solutions for diverse global markets using its patent-pending package designs and manufacturing processes. LedEngin offers catalog as well as full custom solutions to enable flexible system designs for its customers. LedEngin is dedicated to long-term win-win partnering with its customers and suppliers.

LedEngin reserves the right to make changes to improve performance without notice.

Please contact Sales@ledengin.com for more information.