

Fuse holder terminal blocks

Double-deck

for 5 x 20 and 5 x 25 mm fuses

Screw clamp

DIN 1 - DIN 3



End stop		th. 9 mm	BADL	V0	1SNA 399 903 R0200
End stop		th. 10 mm	BAM2	V2	1SNA 206 351 R1600
End stop		th. 10 mm	BAM2 V0	V0	1SNA 296 351 R0000
Rail		35 x 7,5 x 1	PR3.Z2		1SNA 174 300 R1700
Rail		35 x 15 x 2,3	PR4		1SNA 168 500 R1200
Rail		35 x 15 x 1,5	PR5		1SNA 168 700 R2200
Rail		32 x 15 x 1,5	PR1.Z2		1SNA 163 050 R0400

Other end stops, rails and accessories : see section on accessories.


Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.

* Blocks with LED indicator are labeled "+" on the outside of the lever. The indicator can be reversed in the field if required.



Accessories

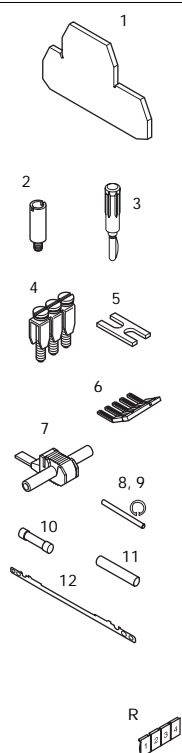


Type	Part numbers
1 End section grey	FEM8D2S (V2) th. 1,5 mm 1SNA 116 913 R0700 FEM8D2S (V0) th. 1,5 mm 1SNA 196 913 R0000
2 Test socket	AL2 (1) DIA. 2 mm 1SNA 163 043 R2100 AL3 (1) DIA. 3 mm 1SNA 163 261 R0000 AL4 (1) DIA. 4 mm 1SNA 163 262 R0100
3 Test plug	FC2 (3) DIA. 2 mm 1SNA 007 865 R2600 FC4 (4) DIA. 4 mm 1SNA 167 860 R0100
4 Assembled jumper bar (without IP 20 protection)	BJM8 (1) 41 A 1SNA 168 520 R0500 BJM8 (1) 41 A 1SNA 168 521 R2200 BJM8 (1) 41 A 1SNA 168 522 R2300 BJM8 (1) 41 A 1SNA 168 523 R2400 BJM8 (1) 41 A 1SNA 168 974 R0000
5 Connector plate	EL6 35 A 1SNA 173 627 R2100
6 Comb-type jumper bar	PC81 35 A 10 poles 1SNA 173 523 R1100
7 IDC jumper	AD2,5 24 A 1SNA 114 205 R2000
8 Assembly rod	TGA8 2 poles 1SNA 168 672 R1100 3 poles 1SNA 168 673 R1200 4 poles 1SNA 168 674 R1300
9 Assembly ring	ANT 1SNA 168 675 R1400
10 Fuse 5 x 20 250 V	FU520 0,5 A 1SNA 008 288 R1500 1 A 1SNA 008 290 R1300 2 A 1SNA 008 291 R0000 3,15 A 1SNA 008 289 R1600 5 A 1SNA 008 292 R0100
Fuse 5 x 25 250 V	FU525 1,6 A 1SNA 167 546 R2200 2 A 1SNA 167 547 R2300 2,5 A 1SNA 167 548 R0400 4 A 1SNA 167 549 R0500 6,3 A 1SNA 167 550 R0200
Fast acting HPC 1500 A	
11 Disconnect link bar	CN5 1SNA 179 371 R1600
12 Shield connector	CBD2S 1SNA 178 408 R1400

R See section on markers marking method

M 4/8.D2.SF

Spacing 8 mm (.315")



Standard block.

Colour	Type	Part numbers
Grey		M 4/8.D2.SF 1SNA 115 604 R2100
Beige V0		M 4/8.D2.SF.V0 1SNA 195 604 R2200


Characteristics

Wire size	IEC		UL/CSA
	NFC	DIN	
Screw clamp Solid wire	0,5-6 mm ²		24-12 AWG
Stranded wire	0,5-4 mm ²		24-12 AWG

Voltage			
Rated	630 V (7)	300 V (1)	
Pulse	8 kV		
Pollution degree	3		
Current			
Rated	6,3 A	20 A	
Wire size			
Rated / Gauge	4 mm ² / A4	12 AWG	
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
9,5 mm .37"	4 mm .16"	0,5-0,8 Nm 4.4-7.1 lb.in	IP 20 NEMA 1

M 4/8.D2.SF...

Spacing 8 mm (.315")



M 4/8.D2.SF with fusion indicator.

Colour	Type	Part numbers
Grey/LED 24/100 V (8)		M 4/8.D2.SFD3 1SNA 115 936 R0300
Grey/Neon 110-230 V (5)		M 4/8.D2.SFL 1SNA 115 646 R2200
Grey/LED 24 V (6)		M 4/8.D2.SFD 1SNA 115 647 R2300
Grey/LED 48 V (6)		M 4/8.D2.SFD1 1SNA 115 648 R0400

Characteristics

Wire size	IEC		UL/CSA
	NFC	DIN	
Screw clamp Solid wire	0,5-6 mm ²		24-12 AWG
Stranded wire	0,5-4 mm ²		24-12 AWG

Voltage			
Rated	500 V (7)	300 V (1)	
Pulse	6 kV		
Pollution degree	3		
Current			
Rated	6,3 A	20 A	
Wire size			
Rated / Gauge	4 mm ² / A4	12 AWG	
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
9,5 mm .37"	4 mm .16"	0,5-0,8 Nm 4.4-7.1 lb.in	IP 20 NEMA 1

Type	Part numbers
FEM8D2S th. 1,5 mm	1SNA 116 913 R0700
AL2 (1) DIA. 2 mm	1SNA 163 043 R2100
AL3 (1) DIA. 3 mm	1SNA 163 261 R0000
AL4 (1) DIA. 4 mm	1SNA 163 262 R0100
FC2 (3) DIA. 2 mm	1SNA 007 865 R2600
FC4 (4) DIA. 4 mm	1SNA 167 860 R0100
BJM8 (1) 41 A	1SNA 168 520 R0500
BJM8 (1) 41 A	1SNA 168 521 R2200
BJM8 (1) 41 A	1SNA 168 522 R2300
BJM8 (1) 41 A	1SNA 168 523 R2400
BJM8 (1) 41 A	1SNA 168 974 R0000
EL6 35 A	1SNA 173 627 R2100
PC81 35 A 10 poles	1SNA 173 523 R1100
AD2,5 24 A	1SNA 114 205 R2000
TGA8 2 poles	1SNA 168 672 R1100
3 poles	1SNA 168 673 R1200
4 poles	1SNA 168 674 R1300
ANT	1SNA 168 675 R1400
FU520 0,5 A	1SNA 008 288 R1500
1 A	1SNA 008 290 R1300
2 A	1SNA 008 291 R0000
3,15 A	1SNA 008 289 R1600
5 A	1SNA 008 292 R0100
FU525 1,6 A	1SNA 167 546 R2200
2 A	1SNA 167 547 R2300
2,5 A	1SNA 167 548 R0400
4 A	1SNA 167 549 R0500
6,3 A	1SNA 167 550 R0200
CBD2S	1SNA 178 408 R1400

RC 610 on grip RC 810 on side

Note: (1) Only for lower deck. (2) Only for upper connection. Use of these accessories requires the user to cut out the partition. (3) For block equipped with test socket AL2. (4) For block equipped with test socket AL4. (5) Leakage current with neon lamp : < 0,5 mA (110 VAC), < 0,7 mA (230 VAC). (6) Leakage current with LED 24 or 48 VDC < 4,5 mA. (7) Insulation voltage of terminal block - operating voltage : according to fuse. (8) Leakage current with LED 24 or 110 VDC : 0,5 mA at 24 V ; 2,2 mA at 110 V.