

IS620, IS621, IS622, IS623
IS621X, IS622X, IS623X



ISOCOM
COMPONENTS

**OPTICALLY COUPLED BILATERAL
SWITCH LIGHT ACTIVATED ZERO
VOLTAGE CROSSING TRIAC**



APPROVALS

- UL recognised, File No. E91231 Package System " TT "
- 'X' SPECIFICATION APPROVALS
- IS621, IS622, IS623 approved to VDE 0884 in 3 available lead form : -
- STD
- G form
- SMD approved to CECC 00802

DESCRIPTION



The IS62_ Series are optically coupled isolators consisting of a Gallium Arsenide infrared emitting diode coupled with a monolithic silicon detector performing the functions of a zero crossing bilateral triac mounted in a standard 6 pin dual-in-line package.

FEATURES

- Options :-
10mm lead spread - add G after part no.
Surface mount - add SM after part no.
Tape & reel - add SMT&R after part no.
- High Isolation Voltage (5.3kV_{RMS})
- Zero Voltage Crossing
- 600V Peak Blocking Voltage
- All electrical parameters 100% tested
- Custom electrical selections available

APPLICATIONS

- CRTs
- Power Triac Driver
- Motors
- Consumer appliances
- Printers

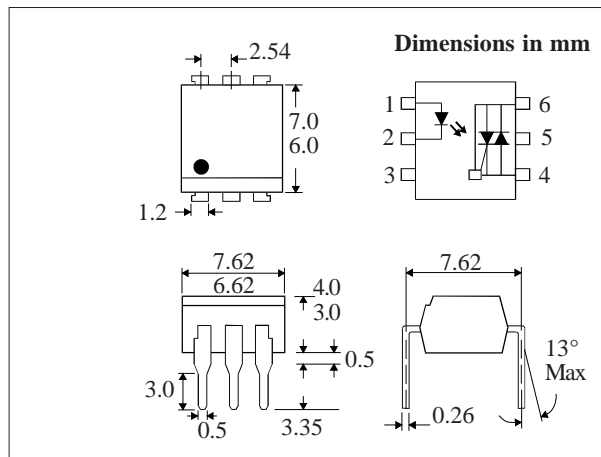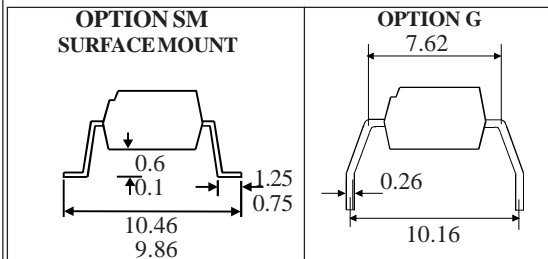

**ABSOLUTE MAXIMUM RATINGS
(25 °C unless otherwise noted)**

Storage Temperature _____ -55°C - +150°C
Operating Temperature _____ -40°C - +100°C
Lead Soldering Temperature _____ 260°C
(1.6mm from case for 10 seconds)

INPUT DIODE

Forward Current _____ 50mA
Reverse Voltage _____ 6V
Power Dissipation _____ 120mW
(derate linearly 1.41mW/°C above 25°C)

OUTPUT PHOTO TRIAC

Off-State Output Terminal Voltage _____ 600V
Forward Current (Peak) _____ 1A
Power Dissipation _____ 150mW
(derate linearly 1.76mW/°C above 25°C)

POWER DISSIPATION

Total Power Dissipation _____ 250mW
(derate linearly 2.94mW/°C above 25°C)

ISOCOM COMPONENTS 2004 LTD

Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1UD
Tel: (01429) 863609 Fax: (01429) 863581

ELECTRICAL CHARACTERISTICS (T_A = 25°C Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V _F) Reverse Current (I _R)		1.2 0.05	1.4 10	V μA	I _F = 20mA V _R = 6V
Output	Peak Off-state Current (I _{DRM}) Peak Blocking Voltage (V _{DRM}) On-state Voltage (V _{TM}) Critical rate of rise of off-state Voltage (dv/dt)	600		500 3.0	nA V V	V _{DRM} = 600V (note 1) I _{DRM} = 500nA I _{TM} = 100mA (peak)
Coupled	Input Current to Trigger (I _{FT})(note 2) IS620 IS621 IS622 IS623 Holding Current , either direction (I _H) Input to Output Isolation Voltage V _{ISO}		400	30 15 10 5	mA mA mA mA μA V _{RMS}	V _{TM} = 3V (note 2) See note 3
Zero Crossing Charact- -eristic	Inhibit Voltage (V _{IH}) Leakage in Inhibited State (I _S)			500	20 μA	V I _F = Rated I _{FT} MT1-MT2 Voltage above which device will not trigger I _F = Rated I _{FT} V _{DRM} = 600V off-state

Note 1. Test voltage must be applied within dv/dt rating.

Note 2. Guaranteed to trigger at an I_F value less than or equal to max. I_{FT}, recommended I_F lies between Rated I_{FT} and absolute max. I_{FT}.

Note 3. Measured with input leads shorted together and output leads shorted together.