


## Surface-mounting, 1-GHz-Band, Miniature, DPDT, High-frequency Relay

- ROHS compliant.
- Superior high-frequency characteristics (at 1 GHz), such as an isolation of 20 dB min. between contacts of the same polarity or 30 dB min. between contacts of different polarity with an insertion loss of 0.2 dB max.
- Miniaturized to 10.3 x 6.9 x 5.4 mm (L x W x H).
- Rated power consumption of 100 mW with high sensitivity.
- Single-side stable and single-winding latching models available.

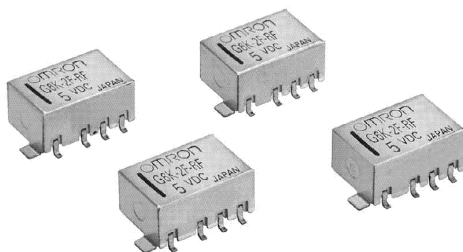

## Ordering Information

### Model Number Legend

G6K□-□□-□□

1 2 3 4

#### 1. Relay Function

- None: Single-side stable
- U: Single-winding latching

#### 2. Classification

- 2: DPDT

#### 3. Terminal Shape

- F: Surface-mounting terminals

#### 4. Special Function

- RF: High-frequency compatible

## List of Models

### Standard Models with Surface-mounting Terminals

Classification	Structure	Contact form	Rated coil voltage	Model
Single-side stable	Plastic sealed	DPDT	3, 4.5, 5, 12, and 24 VDC	G6K-2F-RF
Single-winding latching			3, 4.5, 5, 12, and 24 VDC	G6KU-2F-RF

## Application Examples

- Measurement devices
- Communications devices
- Broadcasting and audio-visual devices

## Specifications

### ■ Contact Ratings

Load	Resistive load
Rated load	125 VAC, 0.3 A 30 VDC, 1 A 1 GHz, 1 W (see note.)
Contact Material	Au (au alloy)
Rated carry current	1 A
Max. switching voltage	125 VAC or 50 VDC
Max. switching current	1 A

Note: This value is for V.SWR of 1.2 max. at the load.

### ■ High-frequency Characteristics

Item	Frequency	1 GHz
Isolation	Between contacts of the same polarity	20 dB min.
	Between contacts of different polarity	30 dB min.
Insertion loss		0.2 dB max.
V.SWR		1.2 max.
Maximum carry power		3 W (See note 3.)
Maximum switching power		1 W (See note 3.)

- Note:
1. The impedance of the measurement system is 50 Ω.
  2. The above values are initial values.
  3. These values are for a V.SWR of 1.2 max. at the load.

### ■ Characteristics

Item	Single-side stable models		Single-winding latching models	
	G6KU-2F-RF		G6KU-2F-RF	
Contact resistance (See note 2.)	100 mΩ max.			
Operating (set) time (See note 3.)	3 ms max. (approx. 1.4 ms)		3 ms max. (approx. 1.2 ms)	
Release (reset) time (See note 3.)	3 ms max. (approx. 1.3 ms)		3 ms max. (approx. 1.2 ms)	
Minimum set/reset pulse time	---			
Insulation resistance (See note 4.)	1,000 MΩ min. (at 500 VDC)			
Dielectric strength	Between coil and contacts	750 VAC, 50/60 Hz for 1 min		
	Between contacts of different polarity	750 VAC, 50/60 Hz for 1 min		
	Between contacts of the same polarity	750 VAC, 50/60 Hz for 1 min		
	Between ground and coil/contacts	500 VAC, 50/60 Hz for 1 min		
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 2.5-mm single amplitude (5-mm double amplitude) and 55 to 500 to 55 Hz, 300 m/s <sup>2</sup> Malfunction: 10 to 55 to 10 Hz, 1.65-mm single amplitude (3.3-mm double amplitude) and 55 to 500 to 55 Hz, 200 m/s <sup>2</sup>			
Shock resistance	Destruction: 1,000 m/s <sup>2</sup> Malfunction: 750 m/s <sup>2</sup>			
Endurance	Mechanical: 50,000,000 operations min. (at a switching frequency of 36,000 operations/hour) Electrical: 100,000 operations min. (at a switching frequency of 1,800 operations/hour)			
Ambient temperature	Operating: -40°C to 70°C (with no icing or condensation)			
Ambient humidity	Operating: 5% to 85%			
Weight	Approx. 0.95 g			

- Note:
1. The above values are initial values.
  2. The contact resistance was measured with 10 mA at 1 VDC with a voltage drop method.
  3. Values in parentheses are actual values.
  4. The insulation resistance was measured with a 500-VDC megohmmeter applied to the same parts as those used for checking the dielectric strength.

### ■ Coil Ratings

#### Single-side Stable Models

##### G6K-2F-RF

Rated voltage (VDC)	3	4.5	5	12	24
Rated current (mA)	33.0	23.2	21.1	9.1	4.6
Coil resistance (Ω)	91	194	237	1,315	5,220
Must operate voltage (V)	80% max. of rated voltage				
Must release voltage (V)	10% min. of rated voltage				
Maximum voltage (V)	150% of rated voltage				
Power consumption (mW)	Approx. 100 mW				


#### Single-winding Latching Models

##### G6KU-2F-RF

Rated voltage (VDC)	3	4.5	5	12	24
Rated current (mA)	33.0	23.2	21.1	9.1	4.6
Coil resistance (Ω)	91	194	237	1,315	5,220
Must operate voltage (V)	75% max. of rated voltage				
Must release voltage (V)	75% max. of rated voltage				
Maximum voltage (V)	150% of rated voltage				
Power consumption (mW)	Approx. 100 mW				


- Note:
1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
  2. The operating characteristics are measured at a coil temperature of 23°C.
  3. The maximum voltage is the highest voltage that can be imposed on the Relay coil instantaneously.

## Engineering Data

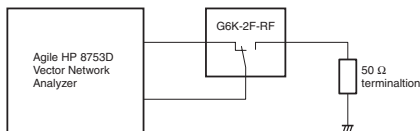


### High-frequency Characteristics (Isolation)

(See notes 1 and 2.)

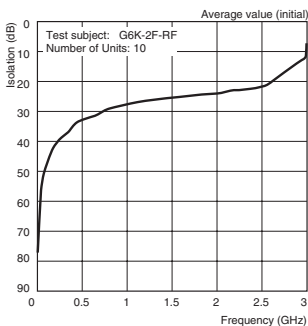


### High-frequency Characteristics (Insertion Loss)

(See notes 1 and 2.)

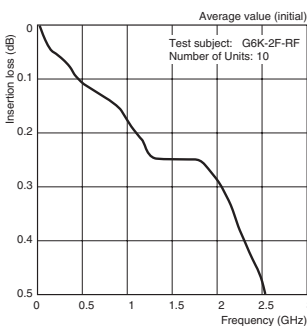

### High-frequency Characteristics (Return Loss V.SWR)

(See notes 1 and 2.)

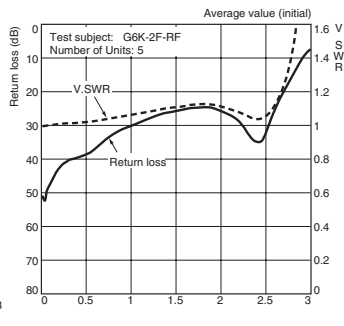

**Note:** Refer to the G6K specifications for basic specifications not shown above.




**Note: 1.** These tests were conducted at an ambient temperature of 23°C.

**2.** High-frequency characteristics depend on the PCB to which the Relay is mounted. Always check these characteristics, including endurance, in the actual machine before use.

## Dimensions


**Note:** All units are in millimeters unless otherwise indicated.

### G6K-2F-RF G6KU-2F-RF





### Mounting Dimensions (Top View)

Tolerance: ±0.1 mm




### Terminal Arrangement/Internal Connections (Top View)



- Note:**
1. Each value has a tolerance of ±0.3 mm.
  2. The coplanarity of the terminals is 0.15 mm max.

## Recommended Soldering Method

### Recommended Conditions for IRS Method (Surface-mounting Terminals)

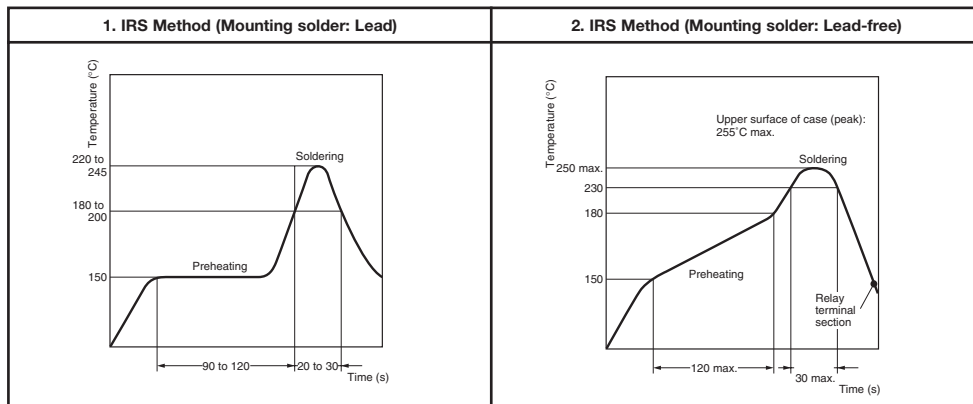


**Note:** Do not submerge the relay in a solder bath. Doing so will deform the resin causing faulty operation.

**Note:** The temperature profile indicates the temperature on the circuit board surface.


The thickness of cream solder to be applied should be between 200 and 250  $\mu\text{m}$  and the land pattern should be based on OMRON's recommended PCB pattern.

To maintain the correct soldering joint shown in the following diagram, we recommend applying solder with the soldering conditions shown on the left.

#### Correct Soldering



#### Incorrect Soldering



Check the soldering in the actual mounting conditions before use.

## Safety Precautions

### ■ Precautions for Correct Use

#### Handling

Use the Relay as soon as possible after opening the moisture-proof package. If the Relay is left for a long time after opening the moisture-proof package, the appearance may suffer and seal failure may occur after the solder mounting process. To store the Relay after opening the moisture-proof package, place it into the original package and sealed the package with adhesive tape.

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

#### Environmental Conditions for Usage, Storage, and Transport

Avoid direct sunlight when using, storing, or transporting the Relay and maintain normal temperature, humidity, and pressure conditions.


#### Long-term Continuously ON Contacts

Using the Relay in a circuit where the Relay will be ON continuously for long periods (rather than switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation and can cause a film to develop on the contact surfaces. We recommend using a latching relay

(magnetic-holding relay) in this kind of circuit. If a single-side stable model must be used in this kind of circuit, we recommend adding fail-safe circuits in case the contact fails or the coil burns out.

#### Claw Securing Force During Automatic Mounting

During automatic insertion of Relays, be sure to set the securing force of each claw to the following so that the Relay's characteristics will be maintained.



Direction A: 1.96 N max.  
Direction B: 4.90 N max.  
Direction C: 1.96 N max.

Secure the claws to the shaded area.

Do not attach them to the center of the Relay or just one part of the Relay.

#### Coating

Do not use silicone coating to coat the Relay when it is mounted to the PCB. Do not wash the PCB after the Relay is mounted using detergent containing silicone. Otherwise, the detergent may remain on the surface of the Relay.