## 146194. > 146-199

## **BBH Transformers**

## portable isolation

240 / 110V Safetran 2400 and 3500



Order Code Continuous **BBH FEC** Rating Z2763 177-162 1200VA 177-163 Z2779 1750VA


Primary: 240V Secondary: 110V Centre tapped

Two new portable isolation transformers constructed to BS3535 and complying with the requirements of Health and Safety at Work. Tool ratings of either 2400VA or 3500VA are available. Fitted with a 2 metre length of cable to the 240V primary, but with two separate industrial 16A output sockets manufactured to BS4343/

Each transformer is fitted with an earth screen between primary and secondary windings. A resettable thermal cut-out is provided. Supplied complete with carrying

	Tool	Dimensions				
Continuous Rating 1200VA 1750VA	Rating 2400VA 3500VA	<b>Weight</b> 13.5kg 14.5kg	H 155 155	<b>W</b> 175 175	<b>D</b> 151 151	

240 / 110V

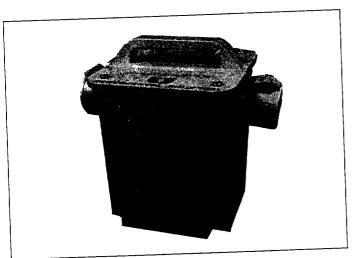

Order Code Continuous **BBH** FEC Rating Z2121 143-410 450VA 143-411 Z2122 800VA 146-812 مر Z2338 1000VA Z2340 46-194 1650VA

Primary: 240V Secondary: 110V Centre tapped

A range of robust safety transformers, which are kitemarked to BS3535 (except Z2340 and Z2338), suitable for 110V portable electric tools.

A 2 metre length of cable is fitted to the 240V input connection and the output is a 16A, 2 pin + earth industrial socket, manufactured to BS4343/CEE17 The Z2340 is fitted with two 16A industrial sockets.

The transformer is fitted with an earth screen between primary and secondary windings. The outlet is fused and provides 110V which is only 55V above earth for the tool. Spare fuse supplied.

Continuous Rating 450VA 800VA 1000VA 1650VA	Tool Rating 900VA 1600VA 2000VA 3300VA	<b>Weight</b> 12 7kg 17 2kg 16.0kg 21.0kg	Dimensi H 260 260 220 260	ons W 192 192 167 192	D 192 inc handle 192 exc sockets 167 exc sockets 192 exc sockets
--	---	---	--	--------------------------------------	--