



Vishay High Power Products


Schottky Rectifier, 2 x 1 A

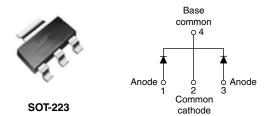

PRODUCT SUMMARY			
I _{F(AV)}	2 x 1 A		
V _R	100 V		

FEATURES





- · Low profile
- · Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- · Common cathode
- Lead (Pb)-free ("PbF" suffix)
- Designed and qualified for industrial level

DESCRIPTION

The 20CJQ100PbF surface mount Schottky rectifier series has been designed for applications requiring very low forward drop and very small foot prints. Typical applications are in portables, switching power supplies, converters, automotive system, freewheeling diodes, battery charging, and reverse battery protection.

MAJOR RATINGS AND CHARACTERISTICS					
SYMBOL	CHARACTERISTICS	VALUES	UNITS		
I _{F(AV)}	Rectangular waveform	2	Α		
V _{RRM}		100	V		
I _{FSM}	t _p = 5 μs sine	380	Α		
V _F	1 Apk, T _J = 125 °C (per leg)	0.67	V		
T _J	Range	- 55 to 175	°C		

VOLTAGE RATINGS				
PARAMETER	SYMBOL	20CJQ100PbF	UNITS	
Maximum DC reverse voltage	V _R	100	V	
Maximum working peak reverse voltage	V_{RWM}	100	V	

ABSOLUTE MAXIMUM RATINGS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum average per leg	_	50 % duty cycle at T _C = 129 °C, rectangular waveform		1	
See fig. 5 per device	I _{F(AV)}			2	Α
Maximum peak one cycle non-repetitive		5 μs sine or 3 μs rect. pulse	Following any rated load condition and with	380	A
surge current per leg I _{FS} See fig. 7		10 ms sine or 6 ms rect. pulse	rated V _{RRM} applied	22	
Non-repetitive avalanche energy per leg	E _{AS}	$T_J = 25 ^{\circ}\text{C}, I_{AS} = 1 \text{A}, L = 2 \text{mH}$		1	mJ
Repetitive avalanche current per leg	I _{AR}	Current decaying linearly to zero in 1 μ s Frequency limited by T _J maximum V _A = 1.5 x V _R typical		1	Α

^{*} Pb containing terminations are not RoHS compliant, exemptions may apply

20CJQ100PbF

Vishay High Power Products Schottky Rectifier, 2 x 1 A



ELECTRICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum forward voltage drop per leg See fig. 1	V _{FM} ⁽¹⁾	1 A	T _J = 25 °C	0.79	V
		2 A		0.89	
		1 A	T _J = 125 °C	0.67	
		2 A		0.76	
Maximum reverse leakage current per leg	I _{RM} ⁽¹⁾	T _J = 25 °C	V _R = Rated V _R	0.1	- mA
See fig. 2		T _J = 125 °C		10	
Typical junction capacitance per leg	C _T	$V_R = 5 V_{DC}$ (test signal range 100 kHz to 1 MHz) 25 °C		45	pF
Typical series inductance per leg	L _S	Measured lead to lead 5 mm from package body		6	nΗ
Maximum voltage rate of change	dV/dt	Rated V _R		10 000	V/μs

Note

 $^{^{(1)}\,}$ Pulse width < 300 $\mu s,$ duty cycle < 2 %

THERMAL - MECHANICAL SPECIFICATIONS				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum junction and storage temperature range	T _J ⁽¹⁾ , T _{Stg}		- 55 to 175	°C
Maximum thermal resistance, junction to lead	R _{thJL}	DC anaration	25	°C/W
Maximum thermal resistance, junction to ambient	R _{thJA}	DC operation	65	
Annyovimata waisht			0.13	g
Approximate weight			0.0045	OZ.
Marking device		Case style SOT-223	20CJ	Q100

Note

(1) $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{thJA}}$ thermal runaway condition for a diode on its own heatsink



Schottky Rectifier, 2 x 1 A Vishay High Power Products

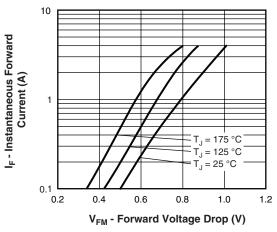


Fig. 1 - Maximum Forward Voltage Drop Characteristics

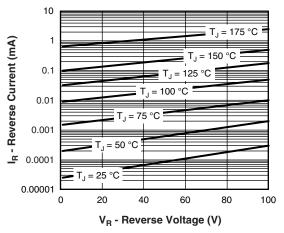


Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage

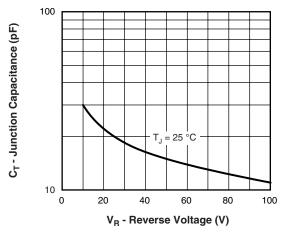


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage

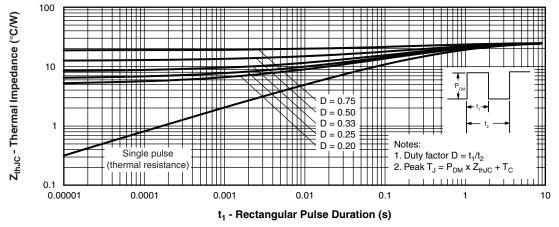


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

Vishay High Power Products Schottky Rectifier, 2 x 1 A



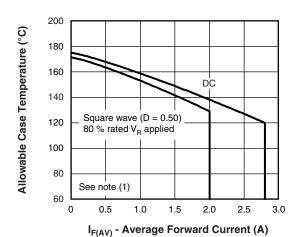


Fig. 5 - Maximum Allowable Case Temperature vs.
Average Forward Current

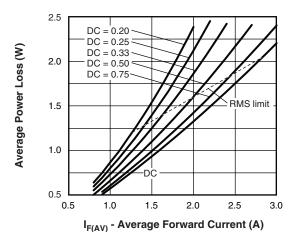


Fig. 6 - Forward Power Loss Characteristics

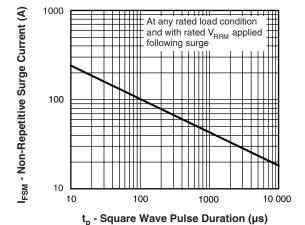


Fig. 7 - Maximum Non-Repetitive Surge Current (Per Leg)

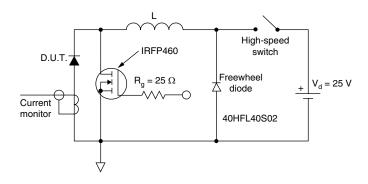


Fig. 8 - Unclamped Inductive Test Circuit

Note


 $\text{Formula used: } T_C = T_J - (\text{Pd} + \text{Pd}_{\text{REV}}) \times R_{\text{th}JC}; \\ \text{Pd} = \text{Forward power loss} = I_{\text{F}(\text{AV})} \times V_{\text{FM}} \text{ at } (I_{\text{F}(\text{AV})}/D) \text{ (see fig. 6)}; \\ \text{Pd}_{\text{REV}} = \text{Inverse power loss} = V_{\text{R1}} \times I_{\text{R}} (1 - D); I_{\text{R}} \text{ at } V_{\text{R1}} = 80 \% \text{ rated } V_{\text{R}}$



Schottky Rectifier, 2 x 1 A Vishay High Power Products

ORDERING INFORMATION TABLE

Device code



- 1 Current rating (2 = 2 A)
- 2 Schottky rectifier series
- 3 Circuit configuration:

C = Common cathode

4 - Package:

J = SOT-223

- 5 Schottky "Q" series
- 6 Voltage rating (100 = 100 V)
- 7 • None = Standard production
 - PbF = Lead (Pb)-free

LINKS TO RELATED DOCUMENTS		
Dimensions http://www.vishay.com/doc?95022		
Part marking information	http://www.vishay.com/doc?95031	
Packaging information http://www.vishay.com/doc?95035		



Vishay

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Revision: 18-Jul-08

Document Number: 91000 www.vishay.com