

HyperLink Wireless 5.4 GHz 28 dBi High Performance Parabolic Dish Wireless LAN Antenna

Model: HG5428D

Applications and Features

Applications:

- 5.4 GHz Band Applications
- Unlicensed European 5.4 GHz Band Applications
- IEEE 802.11a Wireless LAN
- WiFi Systems
- Radio Local Area Networks (RLAN)
- Fixed Wireless Access Systems (FWA)
- WiMAX Technology
- Long-range Directional Applications
- Wireless Bridges
- Backhaul Applications

Features:

- Superior performance
- Aluminum reflector dish
- UV Stable light gray polymer finish
- All weather operation
- Vertical or horizontal polarized mounting
- Includes tilt and swivel mast mount kit
- Optional radome cover kits available
- RoHS Compliant



Description

Superior Performance

The HyperGain® 5.4GHz High-Performance Parabolic Dish WiFi Antenna is ideal for directional 5.4GHz 802.11a band applications as well as applications in the European unlicensed 5.4 GHz band. It features 28 dBi with a 8° beam-width. These antennas can be oriented for either vertical or horizontal polarization.

Rugged and Weatherproof

The reflector dish of these antennas are constructed from high quality aluminum which gives them superior strength. The dish is coated in a light gray UV-inhibited polymer for durability and aesthetics. The small diameter of the dish helps minimize wind loading.

These antennas are supplied with a tilt and swivel mast mount kit. This allows installation at various degrees of incline for easy alignment. The HG5428D can be adjusted from 0° to 30°.



Radome Cover Kits



HyperGain® Radome Covers are an ideal way to provide additional protection to our parabolic dish antennas. These light weight radome kits feature fiberglass construction and UV stable gray finish. Drain holes are provided on the radome cover to help prevent moisture build-up inside the dish antenna.

These radome kits bolt directly to the dish antennas with the provided stainless steel hardware. Drilling mounting holes in the antenna is not required. The radome cover can be attached to existing antennas already mounted in the field or pre-assemble to the antenna before mounting.


Specifications

Frequency	5470-5725 MHz
Gain	28 dBi
Polarization	Horizontal or Vertical
Horizontal Beam Width	8°
Vertical Beam Width	8°
Front to Back Ratio	35 dB
Impedance	50 Ohm
Max. Input Power	100 Watts
VSWR	< 1.5:1 avg.
Weight	13.2 lbs. (6 kg)
Diameter	23.6 in. (600 mm)
Mounting	2 in. (50.8 mm) diameter mast max.
Operating Temperature	-40° C to 85° C (-40° F to 185° F)
Lighting Protection	DC Short
RoHS Compliant	Yes
Connector	N-Female
Radome Cover Part Number	HGR-06

Wind Loading Data		
Wind Speed (MPH)	Loading	With Radome
100	113 lb.	75 lb.
125	177 lb.	116 lb.

RF Antenna Patterns

HG5428D

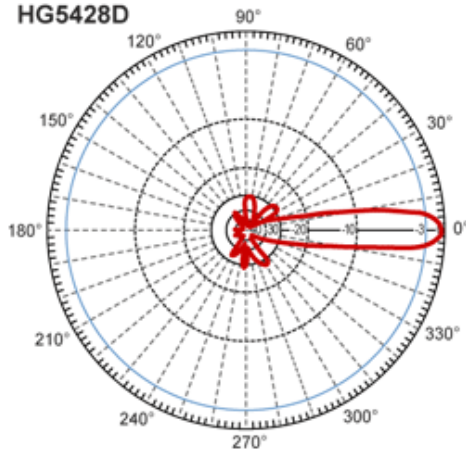

Horizontal