



## IR33 Universal Electronic Controllers

### Models Available

- IR33V7LR20** 1 Relay NTC/PTC/PT1000
- IR33V9MR20** 1 Relay Universal Input
- IR33W7LR20** 2 Relay NTC/PTC/PT1000
- IR33W9MR20** 2 Relay Universal Input
- IR33Z7LR20** 4 Relay NTC/PTC/PT1000
- IR33Z9MR20** 4 Relay Universal Input
- IR33A7LR20** 4 SSR NTC/PTC/PT1000
- IR33A9MR20** 4 SSR Universal Input

### Product Features



- Temperature input or universal input
- Relay or SSR output versions
- 2 independent control loops
- Auto-tuning PID control
- Real time clock
- Infrared receiver and buzzer
- Transformers available for 110V or 230V
- Plug-in terminals

The IR33 universal electronic controllers replace the IR32 range, offering additional features such as auto-tuning PID control and real time clock for managing working cycles and logging alarms. Temperature only versions are available with NTC, PTC or PT1000 inputs, whilst the universal versions can also accept PT100, J and K type thermocouples, DC Voltage and DC mA inputs.

The controllers feature a simple user interface, two independent control loops and are housed in a compact panel mounting enclosure. All versions can be connected to a network for monitoring and programming, using the optional RS-485 serial interface. The IR33 controllers are powered from 12 to 24Vac/dc and optional transformers are available for powering the controllers from 110Vac or 230Vac.

## For digital temperature or process monitoring and control

### Dimensions

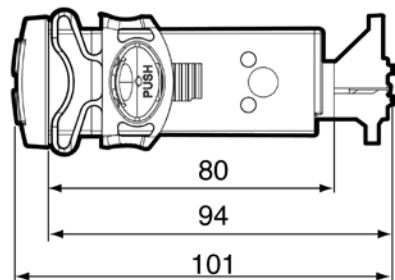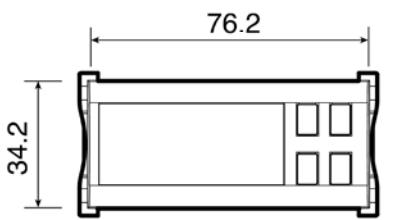


Panel cutout 71mm x 29mm (-0.0/+0.5)

Allow 95mm x 40mm clearance  
around controller for panel clip


### Connections

#### IR33V7LR20 / IR33W7LR20 / IR33Z7LR20

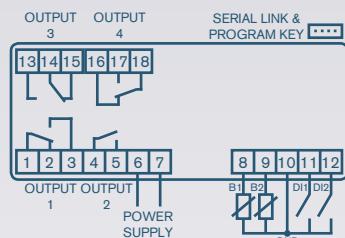


IR33V7LR20 - OUTPUT 1 ONLY  
IR33W7LR20 - OUTPUTS 1 AND 2  
IR33Z7LR20 - OUTPUTS 1, 2, 3 AND 4

#### IR33A7LR20

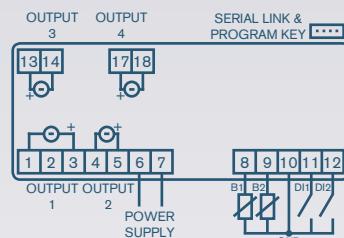


#### IR33V9MR20 / IR33W9MR20 / IR33Z9MR20

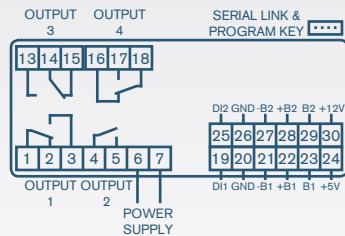

IR33V9MR20 - OUTPUT 1 ONLY  
IR33W9MR20 - OUTPUTS 1 AND 2  
IR33Z9MR20 - OUTPUTS 1, 2, 3 AND 4

#### IR33A9MR20

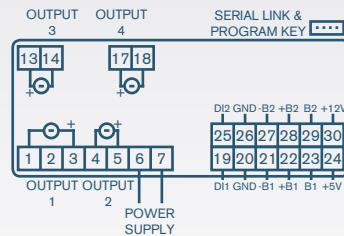

**Ordering information**

| Model           | Code                                   | Description  |
|-----------------|--|--|
| IR33V           | 1                                      | Relay Output Digital Controller  |
| IR33W           | 2                                      | Relay Output Digital Controller  |
| IR33Z           | 4                                      | Relay Output Digital Controller  |
| IR33A           | 4                                      | SSR Output Digital Controller  |
| Input           | Code                                   | Description  |
|                 | 7                                      | NTC (-50 to 90°C)<br>NTC-HT (-40 to 150°C)<br>PTC (-50 to 150°C)<br>PT1000 (-50 to 150°C)  |
|                 | 9                                      | All above inputs and in addition:<br>PT1000 (-199 to 800°C)<br>PT100 (-199 to 800°C)<br>J/K Type Thermocouples<br>DC Voltage 0-1V, -0.5 to +1.3V, 0-10V, 0-5V ratiometric<br>DC Current 0-20mA, 4-20mA |
| Auxiliary Power | Code                                   | Description  |
| LR20            | 12                                     | 12 to 24Vac, 12 to 30Vdc   |
| MR20            | 24                                     | 24Vac/dc   |
| Options         | Code                                   | Description  |
| TRA12UNI11      | 110/12Vac Transformer                  |  |
| TRA12UNI00      | 240/12Vac Transformer                  |  |
| TRA2400001      | 240/24Vac Transformer                  |  |
| IRTRUES000      | Remote control for IR33 universal      |  |
| IROPZKEY00      | Programming key with battery           |  |
| IROPZKEYA0      | Programming key with 230V power supply |  |
| IROPZ485S0      | RS485 serial communication interface   |  |
| Example         | IR33V7LR20                             |  |

**Options****Temperature Probes**

A range of NTC, PTC, PT100 and thermocouple temperature probes are available to suit the IR33 controllers.

**Remote Control**

The infrared remote control allows access to all the main functions and configuration parameters for easy set up of all IR33 controllers from a distance.

**Programming Key**

All IR33 controllers can be programmed quickly using the optional programming key, even when not powered, reducing the risk of errors.

**Specification****Accuracy:**

- ±0.5% of scale range

**Power Supply Voltage:**

- LR: 12 to 24Vac (±10%), 12 to 30Vdc
- 110Vac with TRA12UNI11 transformer
- 230Vac with TRA12UNI00 transformer
- MR: 24Vac/dc
- 230Vac with TRA24000001 transformer

**Frequency:**

- 50/60Hz

**Burden:**

- <3VA

**Inputs:**

- NTC / PTC / PT1000
- PT100, J/K, V, mA (universal model only)

**Digital Inputs:**

- 2 voltage free contacts
- Contact resistance <10ohms
- Closing current 6mA

**Relay Output:**

- 1, 2 or 4 pole relay contacts
- 8(4)A on N.O., 6(4)A on N.C. at 250Vac (resistive)
- 2A on N.O. and N.C. at 250Vac (resistive)
- 100,000 operations

**SSR Output:**

- Maximum output 12V/20mA
- Maximum output resistance 600 ohms

**Operating Temperature & Humidity:**

- -10°C to 50°C
- <90% rh (non-condensing)

**Enclosure Code:**

- Case IP65

**Weight:**

- IR33V: 200g
- IR33W: 220g
- IR33Z: 240g
- IR33A: 200g

**Markings:**

- CE marked (meets EN61010-1 low voltage and EN50081-1/50082-1 EMC directives)

Specification subject to change without notice.

Tempatron: Eltime House, Hall Road, Maldon, Essex, CM9 4NF UK.

# TEMPATRON

Tempatron Industrial Controls is a division of Eltime Ltd.

© Eltime Ltd. Tempatron IR33 Controllers 04/2011