

AC - DC Power Modules



Features:

- UL / cUL / TUV / CE
- Universal input 90 to 265 V ac
- High efficiency up to 77%
- Short circuit protection
- Internal input filter
- 2 Years Warranty

AC - DC Din rail mountable
18 W class 2 power supply
Industrial control equipment

Model List

Model No.	Input Voltage	Output Wattage	Output Voltage	Output Current	EFF. (Minimum)	EFF. (Typical)
Single Output Models						
DRA18-05	90 to 265 V ac	15 W	+5 V dc	3,000 A	73%	75%
DRA18-12		18 W	+12 V dc	1,500 A	75%	77%
DRA18-24			+24 V dc	750 A		

Specifications

All specifications typical at nominal line, full load, 25°C unless otherwise noticed

General						
Characteristics	Conditions		Minimum	Typical	Maximum	Unit
Switching Frequency	Vi nom, Io nom		100			KHz
Isolation Voltage	Input / output		3,000	-	-	V ac
Isolation Resistance	Input / output, at 500 V dc		100	-	-	MΩ
Ambient Temperature	Operating at Vi nom, Io 70% to 100%		-10	-	+50	°C
Case Temperature	Operating at Vi nom, Io nom		-	-	+85	-
Derating	Vi nom, Io nom +51 to +71°C		-	-	2	% / °C
Storage Temperature	Non Operational		-25	-	+85	°C
M.T.B.F.	According to MIL-HDBK-217F, GF40		-	195,000	-	Hrs
Relative Humidity	Vi nom, Io nom		20	-	95	% RH
Dimension	L90 × W22.5 × D115		-	-	-	mm
Cooling	Free air convection		-	-	-	-
Case Material	Plastic		-	-	-	-

AC - DC Power Modules



Input Specifications					
Characteristics	Conditions	Minimum	Typical	Maximum	Unit
Rated Input Voltage	Io nom	100	-	240	V ac
Input Voltage Range	Ta minimum to Ta maximum, AC in	90	-	265	
	Io nom DC in	120	-	370	V dc
Line Frequency	Vi nom, Io nom	47	-	63	Hz
Inrush Current	Io nom Vi : 115 V ac	-	-	10	A
	Vi : 230 V ac	-	-	18	

Output Specifications					
Characteristics	Conditions	Minimum	Typical	Maximum	Unit
Output Voltage Accuracy	Vi nom, Io minimum to Io nom	-	-	±1	%
Minimum Load	Vi nom	0	-	-	
Line Regulation	Io nom, Vi minimum to Vi maximum	-	-	±1	
Load Regulation	Vi nom, Io nom to Io nom	-	-	±2	
Transient Recovery Time	50% load step changed	-	300	-	µs
Temperature Coefficient	Vi nom, Io minimum	-	-	±0.02	% / °C
Ripple and noise	Vi nom, Io nom, BW = 20 MHz	-	-	50	mV
Hold up Time	Io nom Vi = 115 V ac	20	-	-	ms
	Vi = 230 V ac	75	-	-	
Voltage Trim Range	Vi nom, Io nom 5 V to 15 V models	-10	-	+15	%
	24 V model		-	+20	
DC on Indicator Threshold at Start up	Vi nom, Io nom 5 V models	4.5	-	-	V dc
	12 V models	10.8	-	-	
	24 V models	21.6	-	-	
DC Low Indicator Threshold at Start up	Vi nom, Io nom 5 V models	3.75	-	4.5	
	12 V models	9	-	10.8	
	24 V models	18	-	21.6	
Efficiency	Vi nom, Io nom, Po / Pi	Up to 77%, see model list			

Control and Protection					
Characteristics	Conditions	Minimum	Typical	Maximum	Unit
Input Fuse	-	T2 A / 250 V ac internal			
Rated Over Load Protection	Vi nom	110	-	135	%
Over Voltage Protection	Vi nom, Io nom	125	-	145	
Output Short Circuit	Vi nom, Io nom	Hiccup mode			

Approvals and Standards	
UL / cUL	UL508 / UL1310 Listed, Class 2 Power Supply
TUV	EN60950


AC - DC Power Modules



Approvals and Standards	
CE	EN50081-1 / EN55022 for EMI
	EN50082-1 / EN55024 for EMS
FCC	Class B


Circuit Schematic

Block diagram for DRA18 series

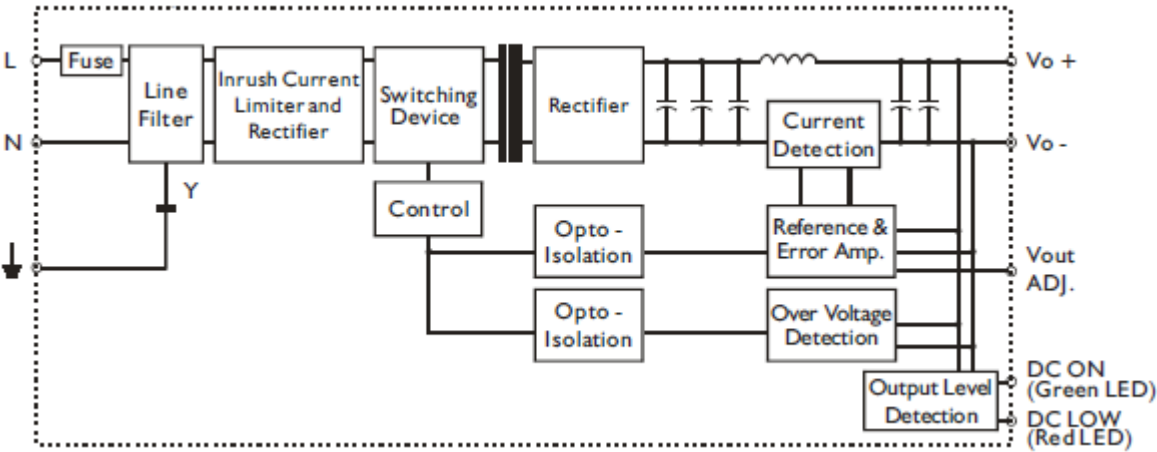

Note: 1) For 24 V Model Only

Mechanism and Pin Configuration

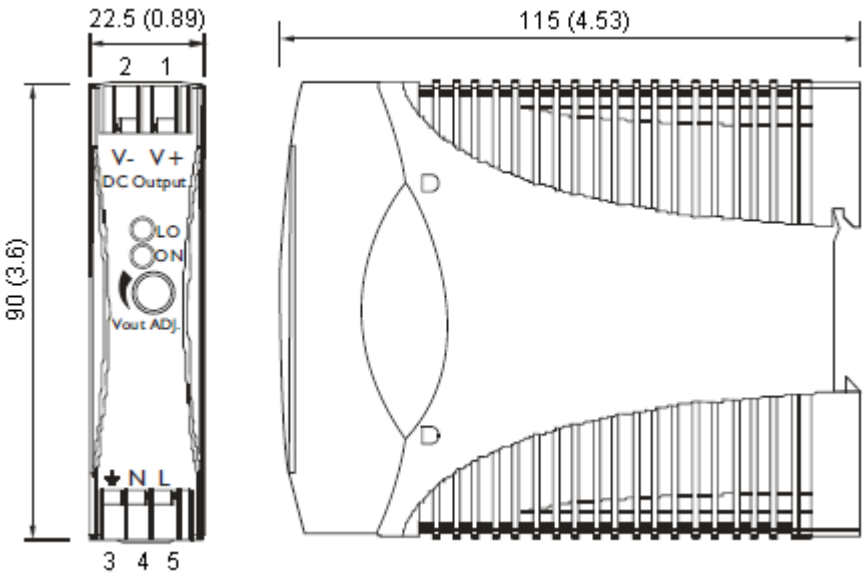

Dimensions : Millimetres (Inches)

Construction

Easy snap-on mounting onto the DIN-Rail (TS35/7.5 or TS35/15), unit sits safely and firmly on the rail; no tools required even to remove

Installation

Ventilation / Cooling
Normal convection
All sides 25 mm free space
For cooling recommended
Connector size range
Solid : 0.2-2 mm² (AWG24-14)
(use copper conductors only)

Physical Characteristics

Case Size : 90 × 22.5 × 115 mm 3.6 × 0.89 × 4.53 inches
Case Material : Plastic
Weight : 150 g




AC - DC Power Modules



Pin Assignment

Pin Number	Designation		Description
1	Out	V+	Positive output terminal
2		V-	Negative output terminal
3	In		Ground this terminal to minimize high-frequency emissions
4		N	Input terminals (neutral conductor, no polarity at DC input)
5		L	Input terminals (phase conductor, no polarity at DC input)
6	Other	ON	Operation indicator LED
7		LO	DC LOW indicator LED
8		Vout ADJ.	Trimmer-potentiometer for Vout adjustment

Derating

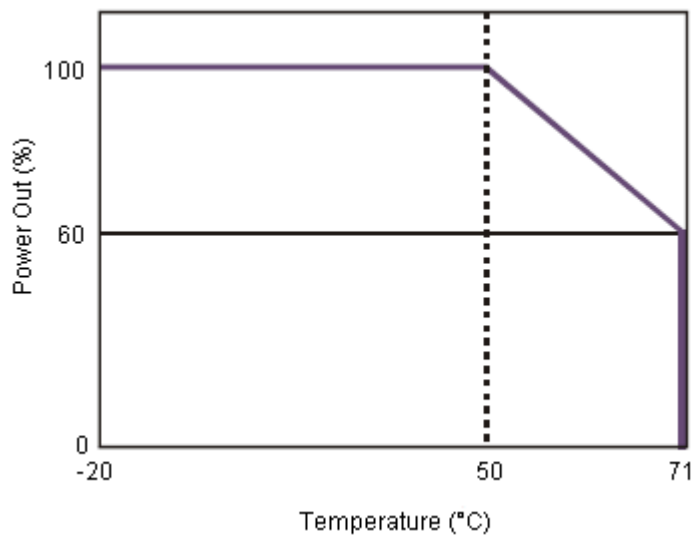

Part Number Table

Description	Part Number
PSU, Din Rail, 18 W, 5 V	DRA18-05
PSU, Din Rail, 18 W, 12 V	DRA18-12
PSU, Din Rail, 18 W, 24 V	DRA18-24

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

