

## PRODUCT DATASHEET Mirella series

last update 3/8/2012





October 31st 2013 6:09 Copyright Ledil Oy - Subject to change without prior notice - Page 1/3

Ledil Oy Salorankatu 10 24240 SALO Finland



## PRODUCT DATASHEET Mirella series

last update 3/8/2012



Ordering number	C12478_MIRELLA-50-W		
Family	Mirella	FWHM	35 degrees
Туре	Reflector	Efficiency	88 %
LED	BXRA LS	cd/lm	1.900
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round	Not compatible if PCB board fixed down by using screws.	
Optic Material	PC		
Holder Material	-		
Fastening	Glue		
Status	Ready		
Ordering number	CN12484_MIRELLA-50-M-DL		
Family	Mirella	FWHM	35 degrees
Туре	-	Efficiency	83 %
LED	BXRA LS	cd/lm	1.600
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	24 mm		
Style	Round	Not compatible if I	PCB board fixed down by using screws.
Optic Material	PC		
Holder Material	-		
Fastening	Glue		
Status	Ready		
Ordering number	CN12485_MIRELLA-50-W-DL		
Family	Mirella	FWHM	43 degrees
Туре	-	Efficiency	82 %
LED	BXRA LS	cd/lm	1.300
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round	Not compatible if PCB board fixed down by using screws.	
Optic Material	PC		
Holder Material	-		
Fastening	Glue		
Status	Ready		

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

Ledil Oy Salorankatu 10 24240 SALO Finland





## **GENERAL INFORMATION**

- Product series especially designed & optimized for BXRA LS series of LEDs.

- Special care taken to make light distribution as uniform as possible.

- Lens material optical grade PC with high UV and temperature resistance (120 degrees of Celcius / 248 degrees of Fahrenheit). Allows use of high current and temperature conditions.

Please find more information about used materials from below:

http://ledil.fi/sites/default/files/Documents/Technical/Material/PC%20Makrolon%202400\_2407\_2456\_2458-UL .pdf

- Reflector is made of aluminium coated PC (120 degrees of Celcius / 248 degrees of Fahrenheit) with protective lacquer (110 degrees of Celcius / 230 degrees of Fahrenheit).

- Fastening to PCB with appropriate adhesive. By clicking link below you can find Ledil recommended glue options.


http://www.ledil.com/datasheets/DataSheet\_GLUES.pdf


NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit boar weaken the strength of the glue.

NOTE 2: All surfaces where glue is applied must be clean, dry and free from grease and dirt. If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer -this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.


Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.


Relative intensity of CN13517\_MIRELLA-50-S-CL-(LS)

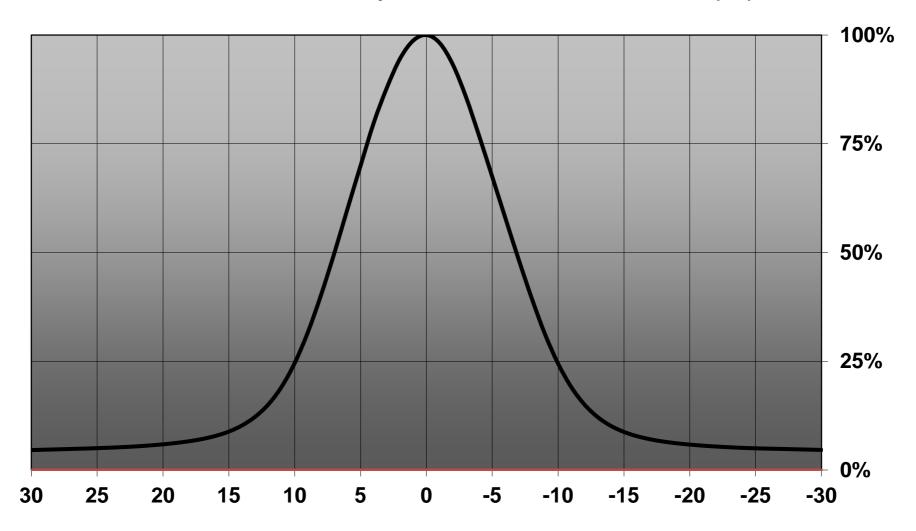


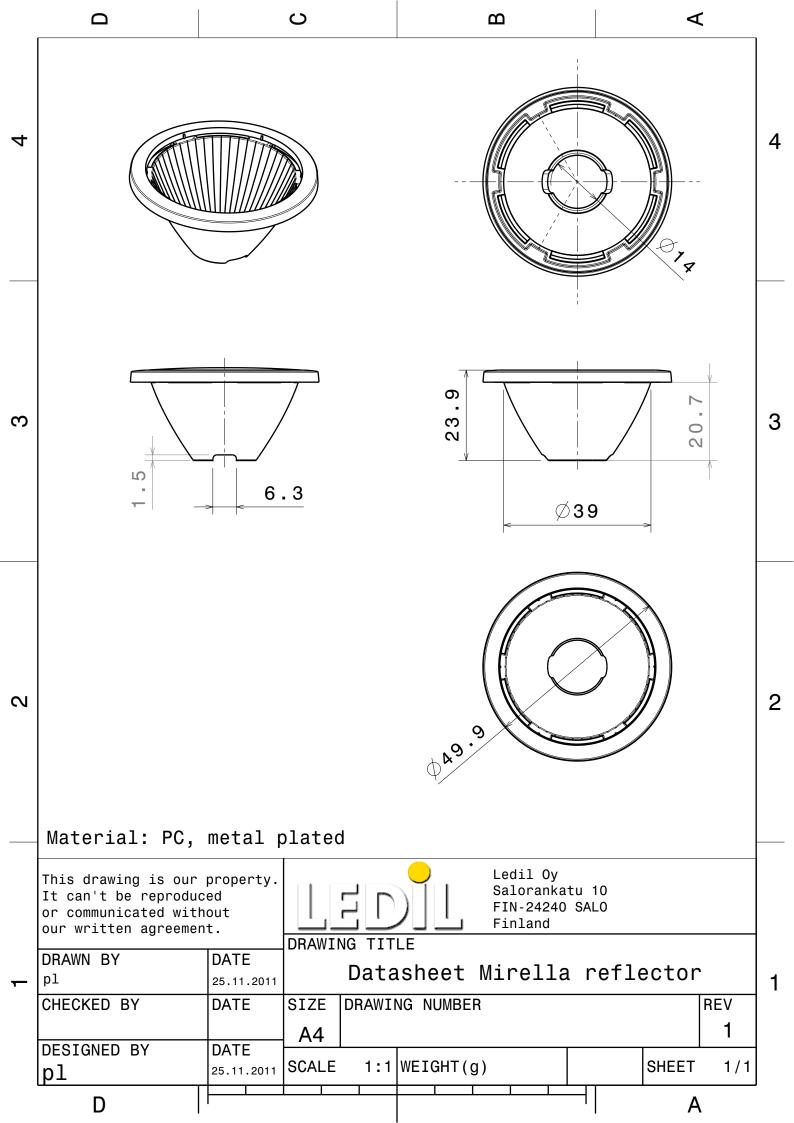




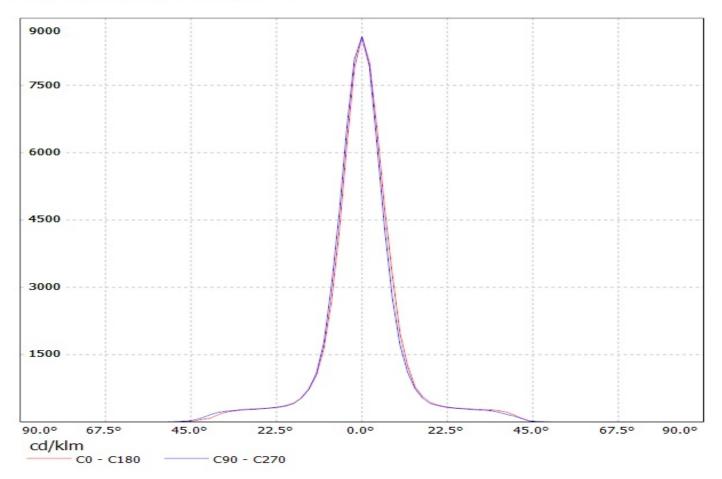




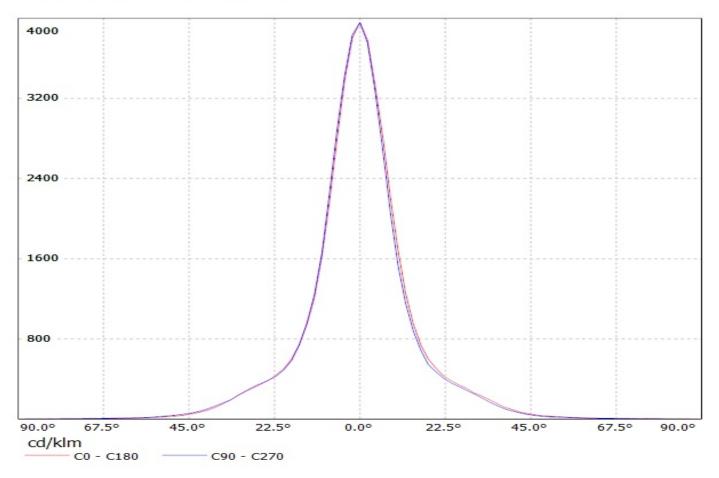




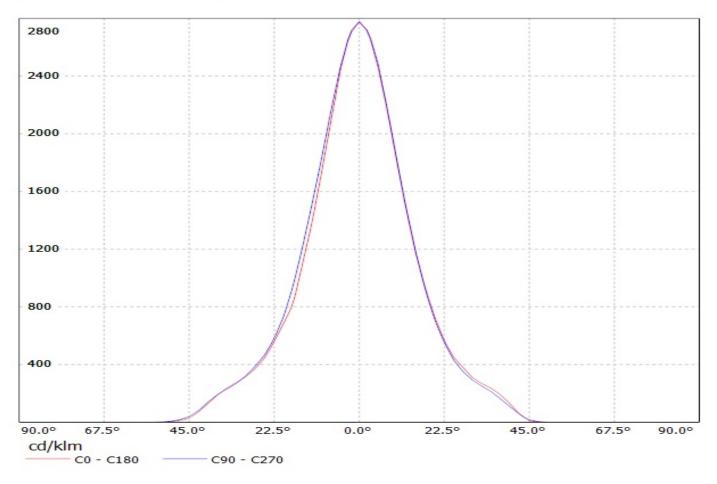


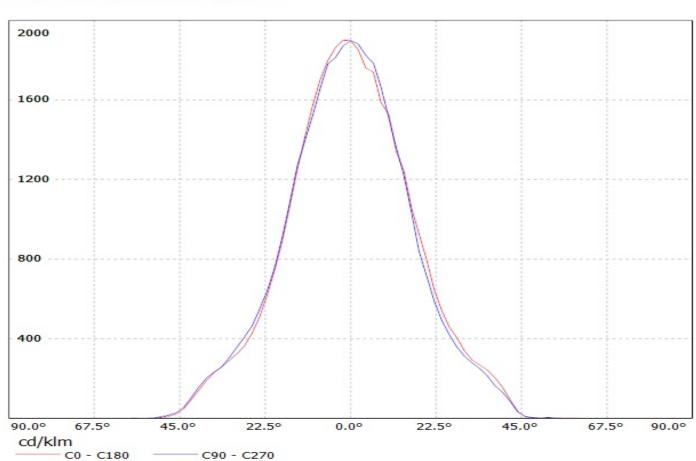


Luminaire: Ledil Oy C12478\_MIRELLA-50-W (Bridgelux LS 170Im @ 250mA) Efficiency=88% Lamps: 1 x Bridgelux LS 170Im @ 250mA

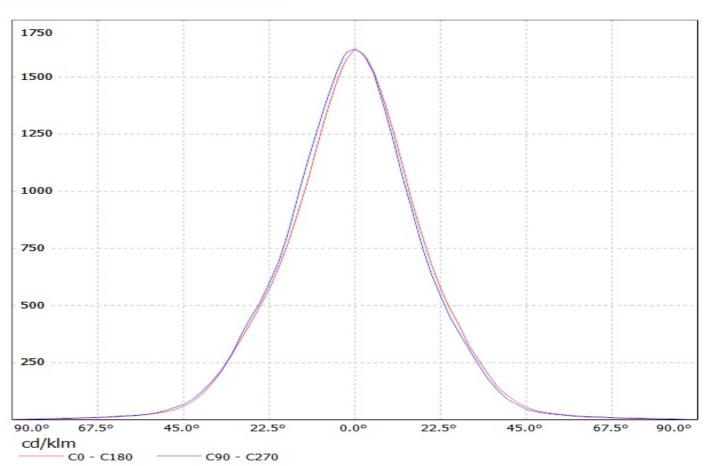


Luminaire: Ledil Oy CN12484\_MIRELLA-50-M-DL (Bridgelux LS 170Im @ 250mA) Efficiency=83% Lamps: 1 x Bridgelux LS 170Im @ 250mA



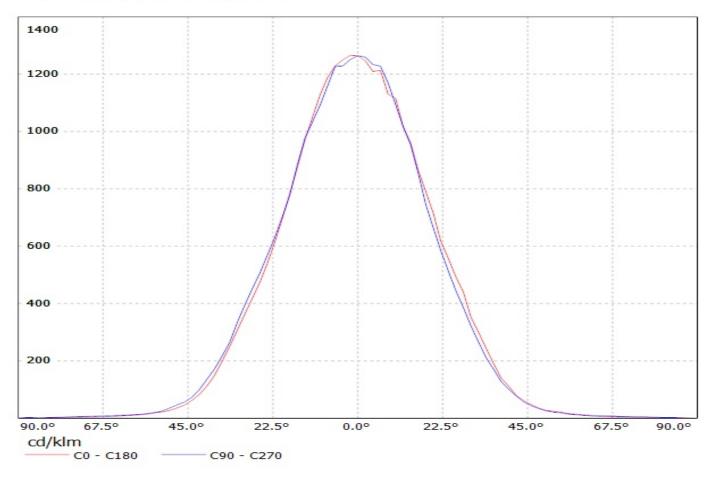


Luminaire: Ledil Oy C12476\_MIRELLA-50-S (Bridgelux LS 170Im @ 250mA) Efficiency=89% Lamps: 1 x Bridgelux LS 170Im @ 250mA

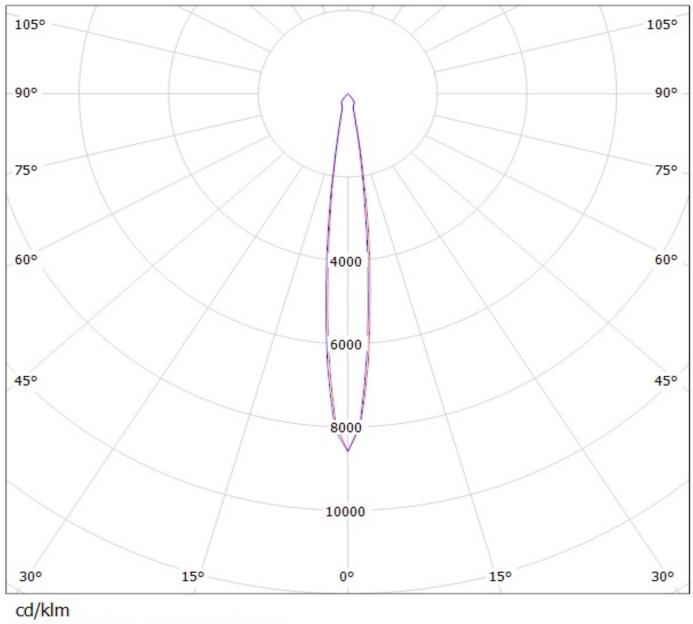


\_\_\_\_\_ C0 - C180 \_\_\_\_\_ C90 - C270

Luminaire: Ledil Oy CN12483\_MIRELLA-50-S-DL (Bridgelux LS 170Im @ 250mA) Efficiency=83% Lamps: 1 x Bridgelux LS 170Im @ 250mA

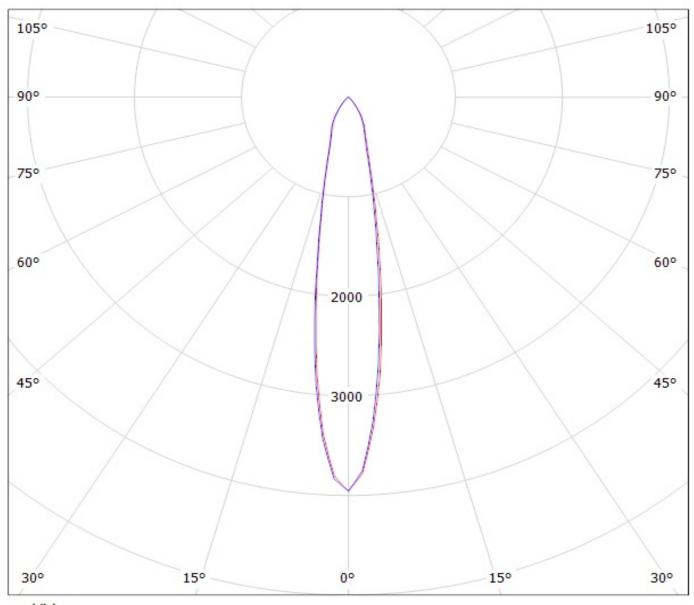


cd/klm \_\_\_\_\_\_ C0 - C180 \_\_\_\_\_ C90 - C270 Luminaire: Ledil Oy C12477\_MIRELLA-50-M (Bridgelux LS 170Im @ 250mA) Efficiency=89% Lamps: 1 x Bridgelux LS 170Im @ 250mA

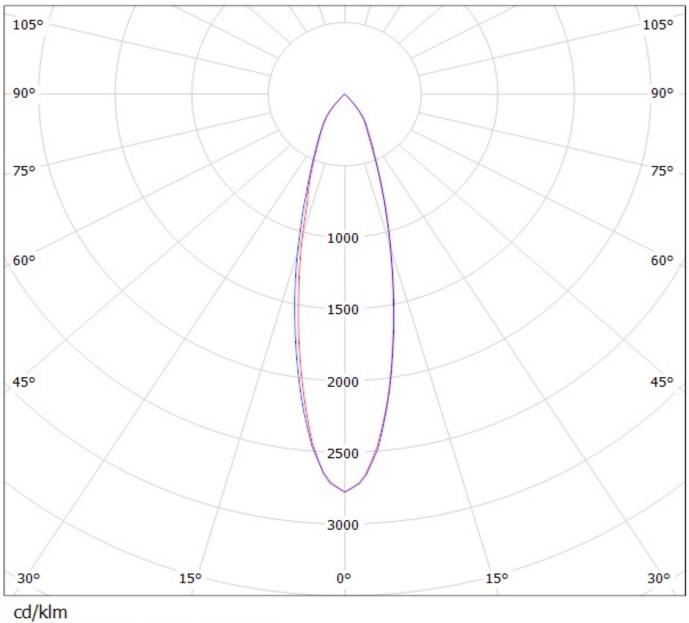


\_\_\_\_\_ C0 - C180 \_\_\_\_\_ C90 - C270

Luminaire: Ledil Oy C12478\_MIRELLA-50-W (Bridgelux LS 170Im @ 250mA) Efficiency=88% Lamps: 1 x Bridgelux LS 170Im @ 250mA

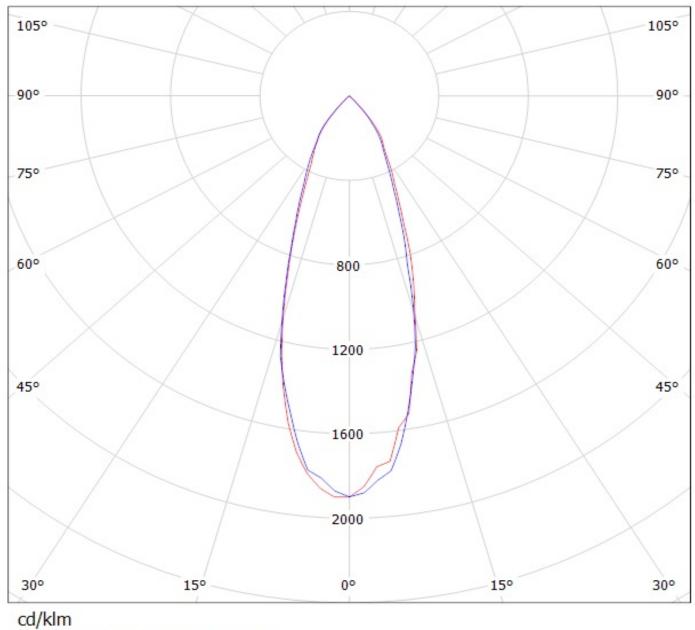


C0 - C180 C90 - C270

Luminaire: Ledil Oy CN12484\_MIRELLA-50-M-DL (Bridgelux LS 170Im @ 250mA) Efficiency=83% Lamps: 1 x Bridgelux LS 170Im @ 250mA

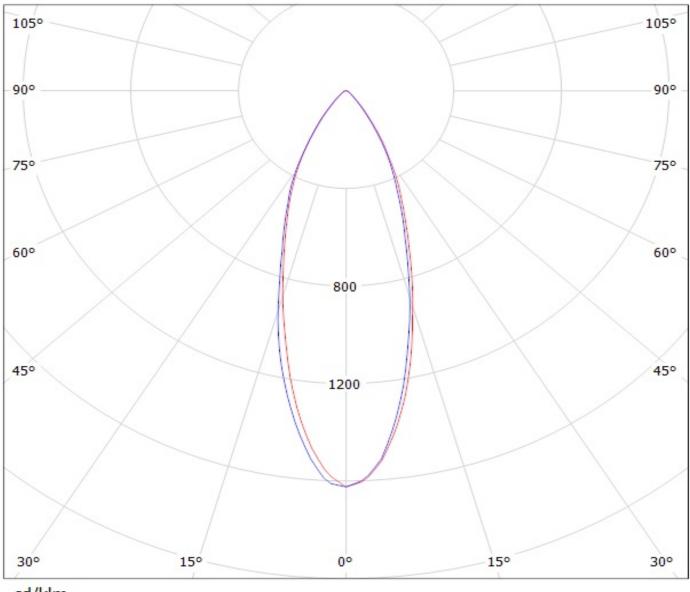

cd/klm \_\_\_\_\_ C0 - C180 \_\_\_\_\_ C90 - C270 Luminaire: Ledil Oy CN12485\_MIRELLA-50-W-DL (Bridgelux LS 170Im @ 250mA) Efficiency=82% Lamps: 1 x Bridgelux LS 170Im @ 250mA

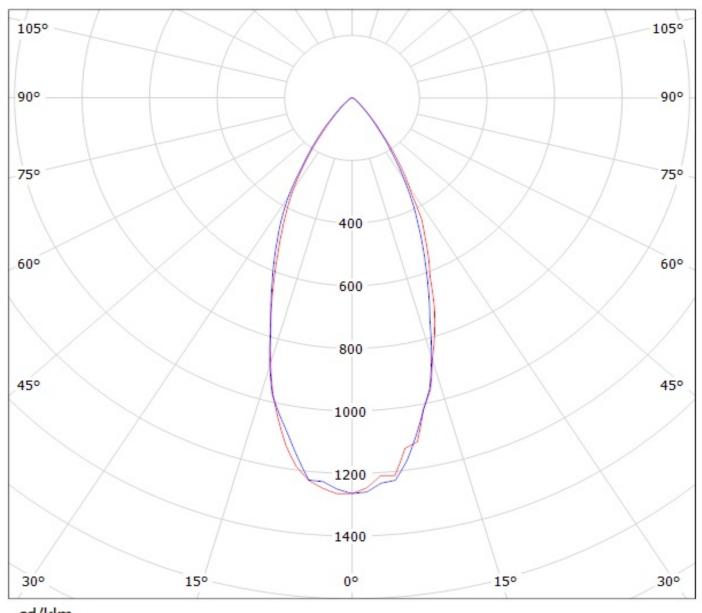

cd/klm \_\_\_\_\_ C0 - C180 \_\_\_\_\_ C90 - C270