


V5-033 Switchable Direction DC Inserter/DC Line Power Tap 18V 2.0A

- 18v 2.0A DC inserter / DC Line Power Tap
- Switchable DC direction with LED indication
- Ideal for inserting DC power into V5 / V9 and other line powered IRS/MATV Systems
- DC block when switched to single direction
- DC pass on RF line when in dual direction mode
- Ideal for powering separate DC zones

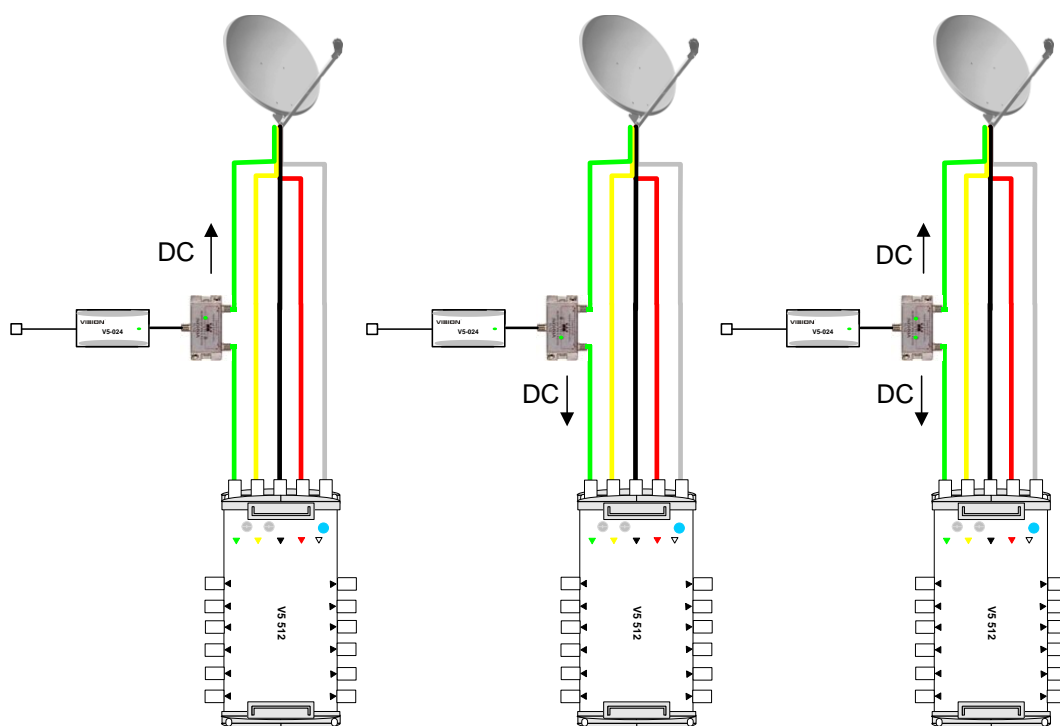

Model	V5-033
RF Frequency Range	5 - 2,150MHz
Insertion Loss	<1.0dB
Voltage / Current Rating	5 - 20V DC / 2.0A max
Connectors	F female connectors (IEC 61169-24)
Housing / EMC Protection	Fully screened diecast / EN50083 -2
Size mm / Weight kg	74 x 60 x 25 / 0.09kg

Vision Products (Europe) Ltd, Unit 5 Redbourne Park, Liliput Road, Brackmills, Northampton NN4 7DT

Tel: 01604 662748 Fax: 01604 662746 Email: technical@vision-products.co.uk

E&OE ©2011 Vision Products (Europe) Ltd

Company Reg No: 05044212

www.vision-products.co.uk