# **SOURIAU**



# Flexible conduit adapter for UTS & UTO plugs



Combination of easy-to use and reliable solution for discrete wire protection

Waterproof IP67/IP68/IP69K & **UV** resistant Ideal for Outdoor applications

Conduit locking mechanism

Easy to install

Designed for NW conduit profile

Compatible with market standard

**Ergonomic design** 

Easy handling

Halogen free



Environmentally friendly




# **UTS & UTO Series**



# **Ordering Information**

Numbers of contacts	Layout	Contacts size	UTS standard Sealed Mated (contacts supplied separately)		UTS Hiseal Sealed Unmated (contacts loaded)		UTO (contacts supplied separately)	
or contacts			Male insert	Female insert	Male insert	Female insert	Male insert	Female insert
2	12E2	#16	-	-	UTS6FC12E2P	UTS6FC12E2S	-	-
2+ground	142G1	#8	-	UTS6FC142G1S	-	-	-	UT06FC142G1SH
3	12E3	#16	-	-	UTS6FC12E3P	UTS6FC12E3S	-	-
4	124	#16	UTS6FC124P	UTS6FC124S	-	-	UT06FC124PH	UT06FC124SH
4	12E4	#16	-	-	UTS6FC12E4P	UTS6FC12E4S	-	-
5	14E5	#16	-	-	-	UTS6FC14E5S	-	-
_	147	#16	-	UTS6FC147S	-	-	-	UT06FC147SH
7	14E7	#16	-	-	-	UTS6FC14E7S	-	-
_	128	#16	UTS6FC128P*	UTS6FC128S 🕑	-	-	UT06FC128PH 🕥	UT06FC128SH <b>∑</b>
8	12E8	#16	-	-	UTS6FC12E8P	UTS6FC12E8S	-	-
	1210	#20	UTS6FC1210P*	UTS6FC1210S()	-	-	UT0W6FC1210PH(>)	UT0W6FC1210SH()
10	12E10	#20	-	-	UTS6FC12E10P	UTS6FC12E10S	-	-
	1412	#16	-	UTS6FC1412S (>)	-	-	-	UT06FC1412SH (>
12	14E12	#16	-	-	-	UTS6FC14E12S	_	-
14	12E14	#20	-	-	UTS6FC12E14P	UTS6FC12E14S	-	-
15	14E15 (2)	Mixed power	-	-	-	UTS6FC14E15S	-	-
	1619	#16	-	-	-	-	-	UT06FC1619SH
16	1626	#20	-	-	-	-	-	UT0W6FC1626SH
18	14E18	#20	-	-	-	UTS6FC14E18S		
	1419	#20	-	UTS6FC1419S	-	-	-	UT0W6FC1419SH
19	14E19	#20	-	-	-	UTS6FC14E19S	-	-
23	1823	#16	-	UTS6FC1823S	-	-	-	UT06FC1823SH
28	2028	#16	-	-	-	-	-	UT06FC2028SH
0.5	1832	#20	-	UTS6FC1832S	-	-	-	UT0W6FC1832SH
32	18E32	#20	-	-	-	UTS6FC18E32S	-	-
35	2235	#16	-	-	-	-	-	UT06FC2235SH
41	2041	#20	-	-	-	-	-	UT0W6FC2041SH
48	2448	#16	-	-	-	-	-	UT06FC2448SH
55	2255	#20	-	-	-	-	-	UTØW6FC2255SH
61	2461	#20	_	_	-		_	UT0W6FC2461SH

# **Product Offering**

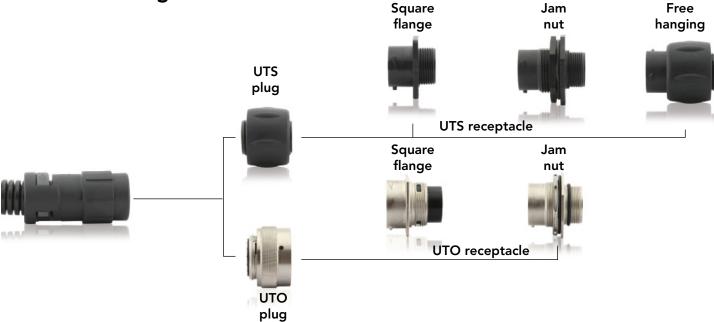

# **Technical Features**

#### **Environmental:**

- From -40°C to +105°C
- Flammability rating: UL 94V0 I2F3 according to NFF 16101 and NFF 16102
- UV resistant
- Salt spray: > 500 Hours
- Sealing: IP67, IP68 & IP69K
- Fluid resistant: Oil and gas, Mineral oil, basic bath

#### Material:

- Backshell: Thermoplastic Polyamid 6
- Halogen free
- RoHS



### **Dimensions**

#### **UTS Series**


Size	A Jam nut	B Square flange	С	ØD	ØE
12	71.1	64.5	61	30.1	NW12
14	71.1	64.5	61	35.1	NW12
18	79.4	72.7	69.2	42	NW17


Ø E: flexible conduit diameter

#### **UTO Series**


Size	A Jam nut	B Square flange	С	ØD	ØE
12	71.1	64.5	60.9	26.1	NW12
14	71.1	64.5	60.9	29.3	NW12
16	79.4	72.8	69.2	32.4	NW17
18	79.4	72.8	69.2	35.2	NW17
20	84.5	76.4	71.1	38.8	NW23
22	84.6	76.4	71.1	42.0	NW23
24	84.4	76.2	70.9	45.0	NW29



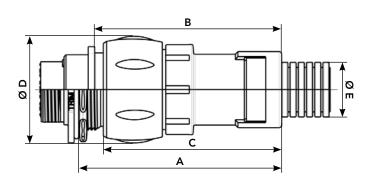

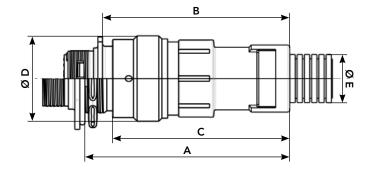


### **Assembly Instructions**

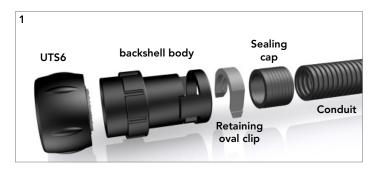



Push conduit with sealing cap into the fitting until sealing cap is no longer visible in the locking element window.

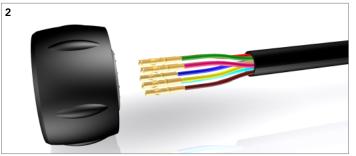

Crimp the contacts and locate them in their cavities. Check the retention by slightly pulling the cable.



Orientate the oval retaining clip as illustrated and locate it in the slot as shown.



To achieve optimum sealing, push the sealing cap completely over the conduit.



Push the retaining clip into backshell body.



Screw the fitting onto the plug thread. Use a product such as Loctite to ensure adequate sealing between the plug and the fitting.



To release the locking mechanism, use a screwdriver.