



CG1000 & CG2000

- ▶ 10/20MHz DDS function generator
- ▶ High stability and resolution
- ▶ USB & RS232 interfaces (CG2000)

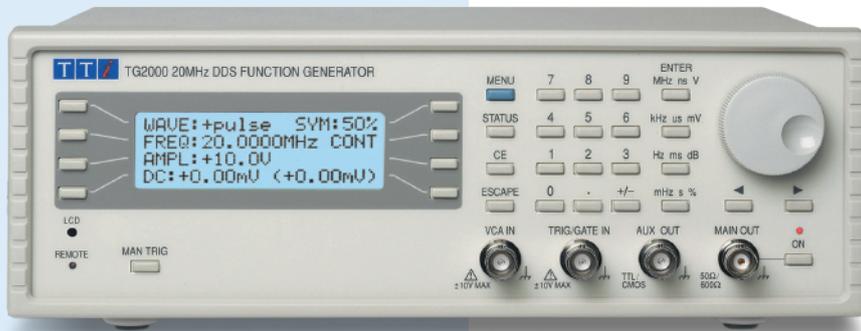

Unlike some other lower cost DDS based generators, the CG1000 and CG2000 provide digital control of all parameters and functions. This allows for the complete instrument status to be stored in the set-up memories. On the CG2000, it also enables complete control via the digital bus interfaces.

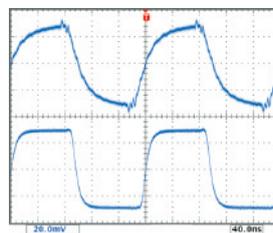

The CG2000 is a high performance DDS based function generator covering the range 1mHz to 20MHz.

It is ideal for engineers who require a high stability and high resolution function generator, but who do not require arbitrary waveforms.

The CG1000 has a lower maximum frequency of 10MHz and omits the RS232 and USB interfaces of the CG2000.

- ▶ 0.001Hz to 10MHz or 20MHz frequency range
- ▶ 6 digits or 1mHz resolution
- ▶ 1ppm stability and 10ppm one year accuracy
- ▶ Low distortion, high spectral purity sine waves
- ▶ Internal phase-continuous sweep, lin or log
- ▶ AM, FSK, gated and tone switching modes
- ▶ 5mV to 20V pk-pk from 50Ω or 600Ω
- ▶ Storage for multiple instrument set-ups
- ▶ USB and RS232 Interfaces (CG2000 only)

Waveform Quality

Ultimately what matters in a function generator is the quality of the output signal. The CG1000 and CG2000 maintain the TTI reputation for high signal quality at all frequencies and all levels.

The waveform capture opposite shows just how much difference that can make. The 'scope display opposite was captured from two 5MHz square wave signals each at 60mV pk-pk level into 50 Ω.

The upper waveform is from a widely available competitive DDS generator. The lower waveform is from a TTI CG2000.

Digital Function Generators

Digital function generators can be divided into three broad categories:

1. DDS* Function Generators without Arbitrary - these perform a similar function to an analog function generator, but with the advantages of DDS based stability, resolution, and sinewave purity. The CG2000 falls into this category.

2. DDS Function/Arbitrary Generators - these have the ability to produce arbitrary waveforms in addition to standard waveforms, but within the limitation imposed by using a DDS system. The CG1010A and CG5011 fall into this category.

3. Universal Arbitrary Waveform Generators - these combine a DDS function generator with a variable-clock* arbitrary generator. Typically these generators incorporate more sophisticated systems for the production of arbitrary waveforms. The TGA1240 and TGA12100 series (see page 19) fall into this category. The CG4001 also has a similar architecture.

Digital Function and Function/Arbitrary Generators - comparison table (see also TGA series - page 18)				
	CG1006	CG1000/2000	CG2511A/5011A	CG2512A/5012A
Number of Channels	One	One	One	Two
Dual Channel Operation	-	-	-	Full Independent, Coupled or Tracking modes
Frequency Range (sine)	0.001Hz to 10MHz	0.001Hz to 10/20MHz	0.001mHz to 25/50MHz	
Frequency Resolution (sine)	6 digits or 1mHz	6 digits or 1mHz	14 digits or 0.001mHz	
Waveform Generation System	DDS	DDS	DDS	
Multi-Generator Phase Lock	No	No	Yes	
Frequency Accuracy	Better than ±10ppm			
Waveform Functions	Sine, Square, Triangle,	Sine, Square, Triangle, +ve/-ve Pulse	Sine, Square, Ramp, Pulse, Noise, PRBS, sinx/x, exponential rise, logarithmic rise	
Variable Symmetry Range	20% to 80% square	20% to 80% square/pulse	0.1% - 99.9% ramp, 20% to 80% square	
Additional Pulse Generator Features			Independent period, delay, width. Variable rise/fall times	
Arbitrary Waveforms (Size)	None	None	Yes - 2 to 128K words	
Arbitrary Vertical Resolution			14 bits	
Arbitrary Waveform Clock			125MHz (DDS)	
ARB Waveform PC Software			Waveform Manager Plus	
Frequency Sweep (Rate/Mode)	50ms to 999s, lin or log	50ms to 999s, lin or log	1ms to 500s, lin or log	
Internal/External Modulations	FSK, AM	Tone, FSK, External AM	Internal/External AM, FM, PM, PWM, Sum, BPSK, FSK	
Internal Trigger Generator	0.001Hz to 10kHz	0.001Hz to 5kHz	0.005 Hz to 1MHz	
Gated/Triggered Burst	No	Yes/No	Yes/1 to 1048575 cycles	
Amplitude Range (pk-pk EMF)	2mV - 20V from 50/600Ω	5mV - 20V from 50/600Ω	20mV - 20V from 50Ω	
DC Offset Range	±10V EMF.	±10V EMF.	±10V EMF unattenuated	
Sinewave Purity	Typically 0.1% to 20kHz <-30dBc at 10MHz	Typically 0.1% to 20kHz <-40dBc at 20MHz	<0.15% to 100kHz, typically <-35dBc at 50MHz	
Output Flatness	±0.5dB to 500kHz; ±2dB to 10MHz	±0.2dB to 500kHz; ±2dB to 20MHz	±0.15dB to 5MHz; ±0.5dB to 50MHz	
Auxiliary Output	Sync	Multi-function output for Waveform Sync, Trigger Out, Sweep Sync., Marker (not CG2000)		
Display	8 digit LCD	Dot-matrix backlit LCD	Full Graphic backlit LCD	
Digital Interfaces	None	RS232/USB (CG2000 only)	USB/LAN (GPIO option)	

Power: 230V or 115V AC nominal 50/60Hz, Size & weight: CG1006 and CG1000/2000: 260 x 88 x 235 mm (WxHxD) 2.0 kg (4.4lb).

CG2511A/5011A: 2U half-rack: 212 x 87 x 335 mm (WxHxD). 2.6 kg (5.7 lb); CG2512A/5012A: 2U half-rack: 212 x 87 x 360 mm (WxHxD). 2.7 kg (6 lb)

N.B. The CG1010A and CG4001 are older legacy products and are not included within the comparison table above.

* For an explanation of DDS (direct digital synthesis) and of DDS and variable-clock architectures for generators go to our web site: www.aimtti.com/go/arb

for more complete information:
www.aimtti.com/generator