Product data sheet Characteristics

TM221C24R controller M221 24 IO relay



Main Commercial Status Commercialised Range of product Modicon M221 Product or component Logic controller type [Us] rated supply volt-100...240 V AC Discrete input number 14 discrete input conforming to IEC 61131-2 Type 1 including 4 fast input Analogue input number 2 at input range: 0...10 V Discrete output type Relay normally open Discrete output number 10 relay

5...250 V AC

5...125 V DC

2 A

Complementary

o o p . o		
Discrete I/O number	24	
Number of I/O expansion module	<= 7 with <= 32 discrete output(s) for relay output <= 7 with <= 144 discrete output(s) for transistor output	
Supply voltage limits	85264 V	
Network frequency	50/60 Hz	
Inrush current	<= 40 A	
Power consumption in VA	<= 55 VA at 100240 V	
Discrete input logic	Sink or source (positive/negative)	
Discrete input voltage	24 V	
Discrete input voltage type	DC	
Analogue input resolution	10 bits	
LSB value	10 mV	
Conversion time	1 ms per channel + 1 controller cycle time for analog input	
Permitted overload on inputs	+/- 15 V DC for analog input permanent +/- 30 V DC for analog input with 5 min maximum	
Voltage state1 guaranteed	>= 15 V for input	
Current state 1 guaranteed	>= 2.5 mA for input	
Voltage state 0 guaranteed	<= 5 V for input	
Current state 0 guaranteed	<= 1 mA for input	
Discrete input current	7 mA for input	
Input impedance	100 kOhm for analog input 3.4 kOhm for discrete input	
Response time	10 ms turn-off operation for output 10 ms turn-on operation for output 5 µs turn-off operation for fast input 5 µs turn-on operation for fast input 100 µs turn-off operation for input; I8I15 terminal 100 µs turn-on operation for input; I8I15 terminal 35 µs turn-off operation for input; I2I5 terminal 35 µs turn-on operation for input; I2I5 terminal	
Configurable filtering time	12 ms for input 3 ms for input 0 ms for input	
Output voltage limits	277 V AC 125 V DC	

Discrete output voltage

Discrete output current

Current per output common	4 A at COM 2 termnal 8 A at COM 1 termnal 8 A at COM 0 termnal	
Absolute accuracy error	+/- 1 % of full scale for analog input	
Electrical durability	Inductive (L/R = 7 ms) DC-13, 24 V / 7.2 W : 300000 cycles Inductive (L/R = 7 ms) DC-13, 24 V / 24 W : 100000 cycles Resistive DC-12, 24 V / 16 W : 300000 cycles Resistive DC-12, 24 V / 48 W : 100000 cycles Inductive AC-14, (cos phi = 0.7) 240 V/ 72 VA : 300000 cycles Inductive AC-14, (cos phi = 0.7) 120 V/ 36 VA : 300000 cycles Inductive AC-14, (cos phi = 0.7) 240 V/ 240 VA : 100000 cycles Inductive AC-14, (cos phi = 0.7) 240 V/ 120 VA : 100000 cycles Inductive AC-15, (cos phi = 0.35) 240 V / 36 VA : 300000 cycles Inductive AC-15, (cos phi = 0.35) 120 V/ 18 VA : 300000 cycles Inductive AC-15, (cos phi = 0.35) 240 V / 120 VA : 100000 cycles Inductive AC-15, (cos phi = 0.35) 120 V/ 18 VA : 300000 cycles Inductive AC-15, (cos phi = 0.35) 120 V/ 60 VA : 100000 cycles Resistive AC-12, 240 V/ 160 VA : 300000 cycles Resistive AC-12, 240 V/ 480 VA : 300000 cycles Resistive AC-12, 240 V/ 480 VA : 100000 cycles Resistive AC-12, 120 V / 80 VA : 100000 cycles	
Switching frequency	20 switching operations/minute with maximum load	
Mechanical durability	>= 20000000 cycles for relay output	
Minimum load	10 mA at 5 V DC for relay output	
Reset time	1 s	
Memory capacity	256 kB for program with 10000 instructions	
Data backed up	256 kB built-in flash memory for backup of programs	
Data storage equipment	2 GB SD card optional	
Battery type	BR2032 lithium non-rechargeable, battery life: 4 yr	
Backup time	1 year at 25 °C by interruption of power supply	
Execution time for 1 KInstruction	0.3 ms for event and periodic task	
Execution time per instruction	0.2 μs Boolean	
Exct time for event task	60 μs response time	
Clock drift	<= 30 s/month at 25 °C	
Regulation loop	Adjustable PID regulator up to 14 simultaneous loops	
Control signal type	Single phase signal at 100 kHz for fast input (HSC mode) Pulse/Direction signal at 100 kHz for fast input (HSC mode) A/B signal at 50 kHz for fast input (HSC mode)	
Counting input number	4 fast input (HSC mode) (counting frequency: 100 kHz), counting capacity: 32 bits	
Integrated connection type	Non isolated serial link "serial 2" with connector RJ45 and interface RS232/ RS485 Non isolated serial link "serial 1" with connector RJ45 and interface RS485 USB port with connector mini B USB 2.0	
Supply	Serial serial link supply at 5 V 200 mA	
Transmission rate	480 Mbit/s - communication protocol: USB 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m - communication protocol: RS232 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m - communication protocol: RS485	
Communication port protocol	Non isolated serial link : Modbus protocol master/slave - RTU/ASCII or SoMa- chine-Network USB port : USB protocol - SoMachine-Network	
Local signalling	1 LED per channel green for I/O state 1 LED green for SL2 1 LED green for SL1 1 LED red for BAT 1 LED green for SD card access (SD) 1 LED red for module error (ERR) 1 LED green for RUN 1 LED green for PWR	
Electrical connection	Mini B USB 2.0 connector for a programming terminal Connector, 4 terminal(s) for analogue inputs Terminal block, 3 terminal(s) for connecting the 24 V DC power supply Removable screw terminal block for outputs Removable screw terminal block for inputs	
Cable length	<= 30 m unshielded cable for output <= 10 m shielded cable for fast input <= 30 m unshielded cable for input	



1 1.0	No. 2 - Interdirect consequences of the first	
Insulation	Non-insulated between analogue inputs	
	Non-insulated between analogue input and internal logic	
	500 V AC between output groups	
	500 V AC between output and internal logic	
	Non-insulated between inputs	
	500 V AC between fast input and internal logic	
	500 V AC between input and internal logic	
Marking	CE	
Sensor power supply	24 V DC at 250 mA supplied by the controller	
Mounting support	Plate or panel with fixing kit	
	Top hat type TH35-7.5 rail conforming to IEC 60715	
	Top hat type TH35-15 rail conforming to IEC 60715	
Height	70 mm	
Depth	70 mm	
Width	110 mm	
Product weight	0.395 kg	

Environment

Environment		
Standards	EN/IEC 61131-2 EN/IEC 61010-2-201	
Product certifications	CSA CULus IACS E10 RCM	
Resistance to electrostatic discharge	4 kV on contact conforming to EN/IEC 61000-4-2 8 kV in air conforming to EN/IEC 61000-4-2	
Resistance to electromagnetic fields	1 V/m (2 GHz3 GHz) conforming to EN/IEC 61000-4-3 3 V/m (1.4 GHz2 GHz) conforming to EN/IEC 61000-4-3 10 V/m (80 MHz1 GHz) conforming to EN/IEC 61000-4-3	
Resistance to magnetic fields	30 A/m at 5060 Hz conforming to EN/IEC 61000-4-8	
Resistance to fast transients	1 kV for serial link conforming to EN/IEC 61000-4-4 1 kV for Ethernet line conforming to EN/IEC 61000-4-4 1 kV for I/O conforming to EN/IEC 61000-4-4 2 kV for relay output conforming to EN/IEC 61000-4-4 2 kV for power lines conforming to EN/IEC 61000-4-4	
Surge withstand	1 kV for relay output in differential mode conforming to EN/IEC 61000-4-5 1 kV for power lines (AC) in differential mode conforming to EN/IEC 61000-4-5 0.5 kV for power lines (DC) in differential mode conforming to EN/IEC 61000-4-5 1 kV for shielded cable in common mode conforming to EN/IEC 61000-4-5 1 kV for I/O in common mode conforming to EN/IEC 61000-4-5 2 kV for relay output in common mode conforming to EN/IEC 61000-4-5 2 kV for power lines (AC) in common mode conforming to EN/IEC 61000-4-5 1 kV for power lines (DC) in common mode conforming to EN/IEC 61000-4-5	
Resistance to conducted disturbances, induced by radio frequency fields	10 Vrms (spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz)) conforming to Marine specification (LR, ABS, DNV, GL) 3 Vrms (0.180 MHz) conforming to Marine specification (LR, ABS, DNV, GL) 10 Vrms (0.1580 MHz) conforming to EN/IEC 61000-4-6	
Electromagnetic emission	Radiated emissions conforming to EN/IEC 55011 class A 10 m, 230 MHz1 GHz: 47 dB μ V/m QP Radiated emissions conforming to EN/IEC 55011 class A 10 m, 30230 MHz: 40 dB μ V/m QP Conducted emissions conforming to EN/IEC 55011 power lines, 1.530 MHz: 63 dB μ V/m QP Conducted emissions conforming to EN/IEC 55011 power lines, 150 kHz1.5 MHz: 7963 dB μ V/m QP Conducted emissions conforming to EN/IEC 55011 power lines, 10150 kHz: 12069 dB μ V/m QP Conducted emissions conforming to EN/IEC 55011 power lines, 10150 kHz: 12069 dB μ V/m QP Conducted emissions conforming to EN/IEC 55011 power lines (AC), 0.5300 MHz: 73 dB μ V/m QP/60 dB μ V/m AV Conducted emissions conforming to EN/IEC 55011 power lines (AC), 0.150.5 MHz: 79 dB μ V/m QP/66 dB μ V/m AV	
Immunity to microbreaks	10 ms	
Ambient air temperature for operation	-1035 °C for vertical installation -1055 °C for horizontal installation	
Ambient air temperature for storage	-2570 °C	
Relative humidity	1095 % without condensation in storage 1095 % without condensation in operation	
IP degree of protection	IP20 with protective cover in place	
Pollution degree	<= 2	





Operating altitude	02000 m
Storage altitude	03000 m
Vibration resistance	3 gn (vibration frequency: 8.4150 Hz) on panel mounting 3.5 mm (vibration frequency: 58.4 Hz) on panel mounting 3 gn (vibration frequency: 8.4150 Hz) on symmetrical rail 3.5 mm (vibration frequency: 58.4 Hz) on symmetrical rail
Shock resistance	10 gn (test wave duration:11 ms)

Product data sheet Dimensions Drawings

TM221C24R


Dimensions






TM221C24R

Mounting on a Rail




Direct Mounting on a Panel Surface




(1) Install a mounting strip

Mounting Hole Layout

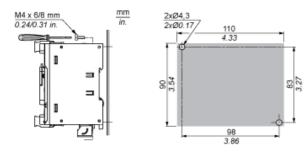


Mounting

Correct Mounting Position

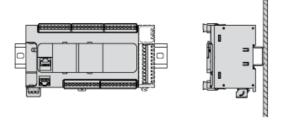


Acceptable Mounting Position



Incorrect Mounting Position









Clearance








Product data sheet Connections and Schema

TM221C24R


Digital Inputs

Wiring Diagram (Positive Logic)



(*) Type T fuse

Wiring Diagram (Negative Logic)




(*) Type T fuse

Connection of the Fast Inputs




Relay Outputs

Positive Logic (Sink)

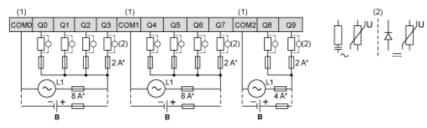


- (*) Type T fuse
- (1) The COM0, COM1 and COM2 terminals are not connected internally.
- (2) To improve the life time of the contacts, and to protect from potential inductive load damage, you must connect a free wheeling diode in parallel to each inductive DC load or an RC snubber in parallel of each inductive AC load

Negative Logic (Source)

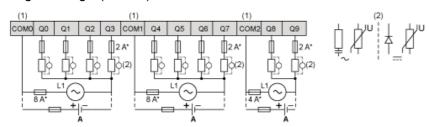


- (*) Type T fuse
- (1) The COM0, COM1 and COM2 terminals are not connected internally.
- (2) To improve the life time of the contacts, and to protect from potential inductive load damage, you must connect a free wheeling diode in parallel to each inductive DC load or an RC snubber in parallel of each inductive AC load

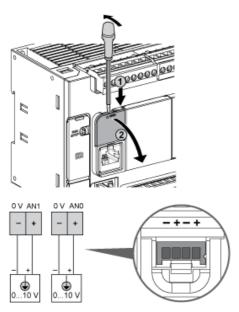

The (-) poles are connected internally.

Pin	Wire Color
0 V	Black
AN1	Red
0 V	Black
AN0	Red

USB Mini-B Connection

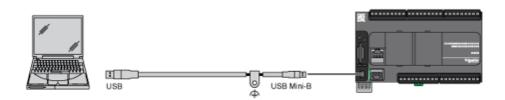


SL1 Connection



SL1

N°	RS 232	RS 485
1	RxD	N.C.
2	TxD	N.C.
3	RTS	N.C.
4	N.C.	D1 (A+)
5	N.C.	D0 (B-)
6	стѕ	N.C.
7	N.C.	5 Vdc
8	Common	Common

N.C.: not connected

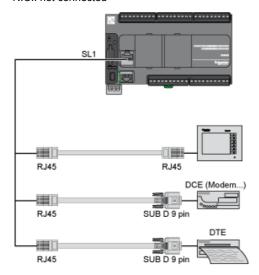

SL2 Connection




N°	RS 485
1	N.C.
2	N.C.
3	N.C.
4	D1 (A+)
5	D0 (B-)
6	N.C.
7	N.C.
8	Common

N.C.: not connected


Derating Curves

Embedded Digital Inputs (No Cartridge)

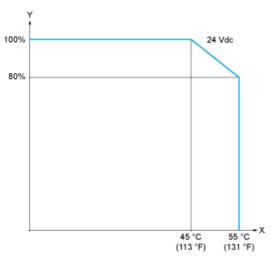

X: Ambient temperatureY: Input simultaneous ON ratio

Embedded Digital Inputs (with Cartridge)

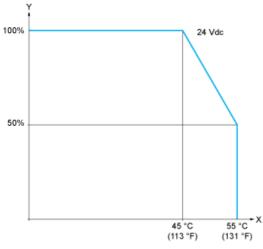

X: Ambient temperatureY: Input simultaneous ON ratio