

Single Phase Silicon Bridge Rectifier

$V_{RRM} = 600\text{ V} - 1000\text{ V}$

$I_O = 25\text{ A}$

Features

- High efficiency
- Silicon junction
- Metal case
- Types from 600 V to 1000 V V_{RRM}
- Not ESD Sensitive


Mechanical Data

Case: Mounted in the bridge encapsulation

Mounting: Hole for #10 screw

Polarity: Marked on case

KBPC-T/W Package

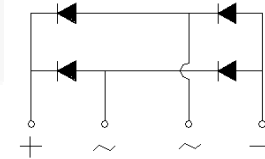

Maximum ratings at $T_c = 25\text{ }^\circ\text{C}$, unless otherwise specified (KBPCXXXXT uses KBPC-T package while KBPCXXXXW uses KBPC-W package)

| Parameter | Symbol | Conditions | KBPC2506T/W | KBPC2508T/W | KBPC2510T/W | Unit |
|---------------------------------|-----------|------------|-------------|-------------|-------------|------------------|
| Repetitive peak reverse voltage | V_{RRM} | | 600 | 800 | 1000 | V |
| RMS reverse voltage | V_{RMS} | | 420 | 560 | 700 | V |
| DC blocking voltage | V_{DC} | | 600 | 800 | 1000 | V |
| Operating temperature | T_j | | -55 to 150 | -55 to 150 | -55 to 150 | $^\circ\text{C}$ |
| Storage temperature | T_{stg} | | -55 to 150 | -55 to 150 | -55 to 150 | $^\circ\text{C}$ |

Electrical characteristics at $T_c = 25\text{ }^\circ\text{C}$, unless otherwise specified






Single phase, half sine wave, 60 Hz, resistive or inductive load

For capacitive load derate current by 20%

| Parameter | Symbol | Conditions | KBPC2506T/W | KBPC2508T/W | KBPC2510T/W | Unit |
|---|-----------------|---|-------------|-------------|-------------|--------------------|
| Maximum average forward rectified current | I_O | $T_c = 55\text{ }^\circ\text{C}$ | 25 | 25 | 25 | A |
| Peak forward surge current | I_{FSM} | 8.3 ms half sine-wave | 350 | 350 | 350 | A |
| Maximum instantaneous forward voltage per leg | V_F | $I_F = 12.5\text{ A}$ | 1.1 | 1.1 | 1.1 | V |
| Maximum DC reverse current at rated DC blocking voltage per leg | I_R | $T_c = 25\text{ }^\circ\text{C}$ $T_c = 100\text{ }^\circ\text{C}$ | 5 500 | 5 500 | 5 500 | μA |
| Typical junction capacitance ¹ | C_j | | 300 | 300 | 300 | pF |
| Typical thermal resistance ² | $R_{\theta JC}$ | | 1.9 | 1.9 | 1.9 | $^\circ\text{C/W}$ |


¹ - Measured at 1 MHz and applied reverse voltage of 4.0 V D.C.

² - Device mounted on 300 mm x 300 mm x 1.6 mm Cu plate heatsink

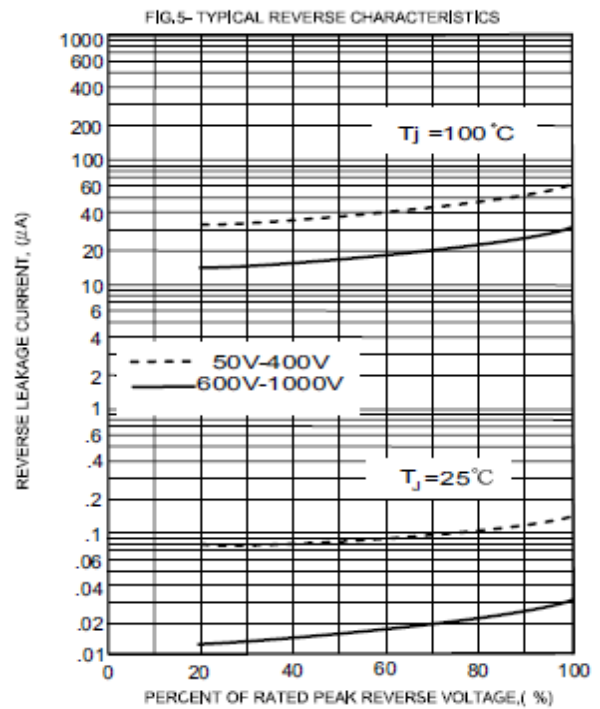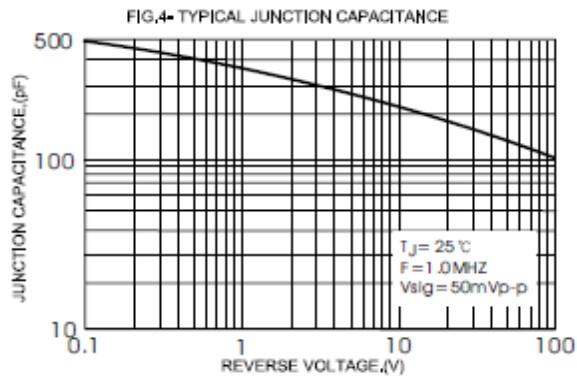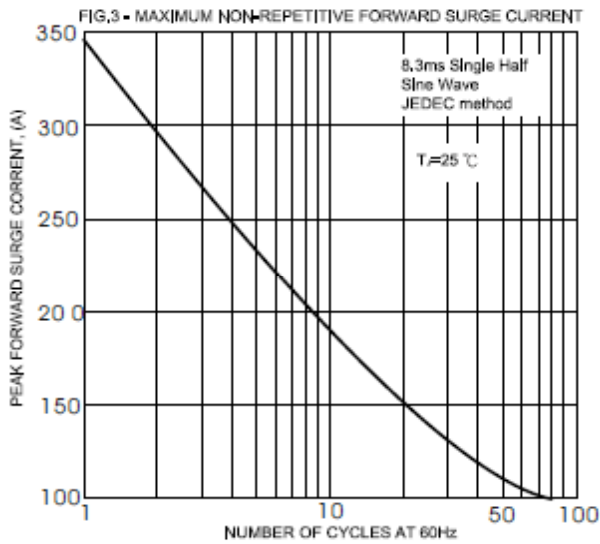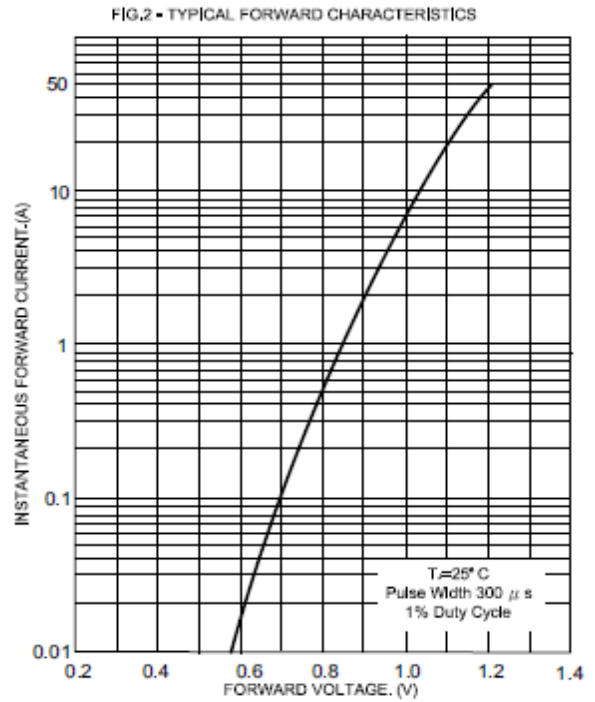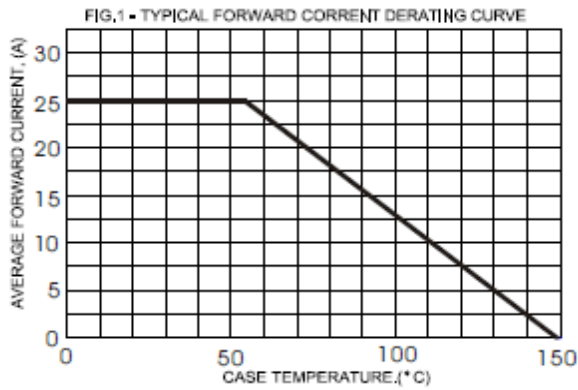

Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

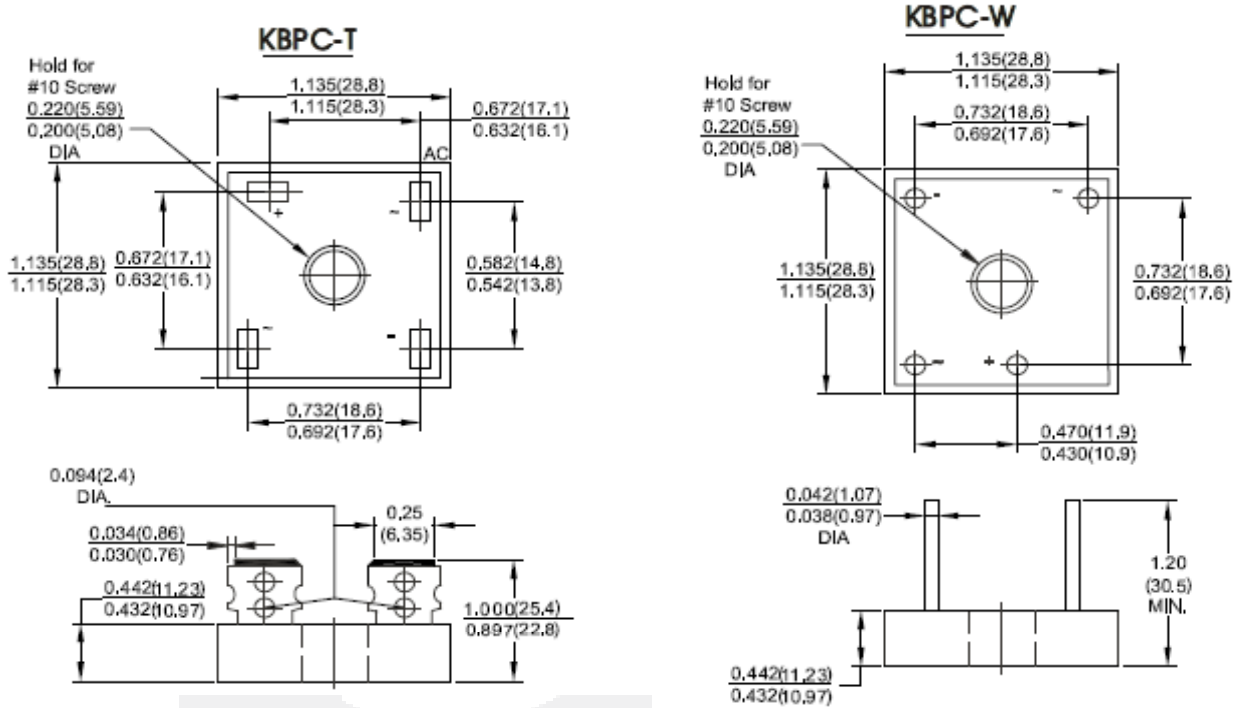

Dimensions in inches and (millimeters)

