

P26-Series

Pushbutton Switches

The P26-Series pushbutton switches are single pole, AC rated for 8 amps at 125 VAC and suitable for shallow back panel applications. These switches are momentary action with a medium actuation force (13 oz. typical). The P26-Series switch is equipped with a slow-make, slow-break contact mechanism.

Applications:

- ♦ Intercoms
- ♦ Security System
- ♦ Electronic Signs
- ♦ Marine



Carling Technologies™

Innovative Designs. Powerful Solutions.

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Email: sales@carlingtech.com
Application Support: team2@carlingtech.com
Phone: (860) 793-9281 • Fax: (860) 793-9231
www.carlingtech.com

Dielectric Strength

UL/CSA: 1000V - live to dead metal parts

Electrical Life

25,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

P26L - 1D - BL

¹ Base Part Number

² Bushing Style

³ Button Style/Color

1 BASE PART NUMBER: SERIES/POLES/CIRCUITRY/ RATING/TERMINATION

Single Pole	Solder Lug	.250 Tab	Wire Leads
3A 250VAC, 6A 125 VAC, 3/4 125V	P26A	P26B	P26F
Off - (On)	P26L	-	P26T
On - (Off)			
3A 277VAC, 6A 125 VAC¹	P267A	P267B	P267F
Off - (On)	P267L	-	P267T
On - (Off)			

2 BUSHING STYLE


	length	diameter
1A	.406	.375
1B	.406	.468
1C	.465	.375
1D³	.465	.468

3 BUTTON STYLE/COLOR

BL	Black Nylon
RD	Red Nylon
RND MTL²	Round Metal
CON MTL²	Concave Metal

Notes:

- 1 Additional ratings available. Consult factory for details
- 2 Only available with 1D bushing in .562 length
- 3 Length is .562 for RND MTL and CON MTL buttons
- () Indicates momentary function.

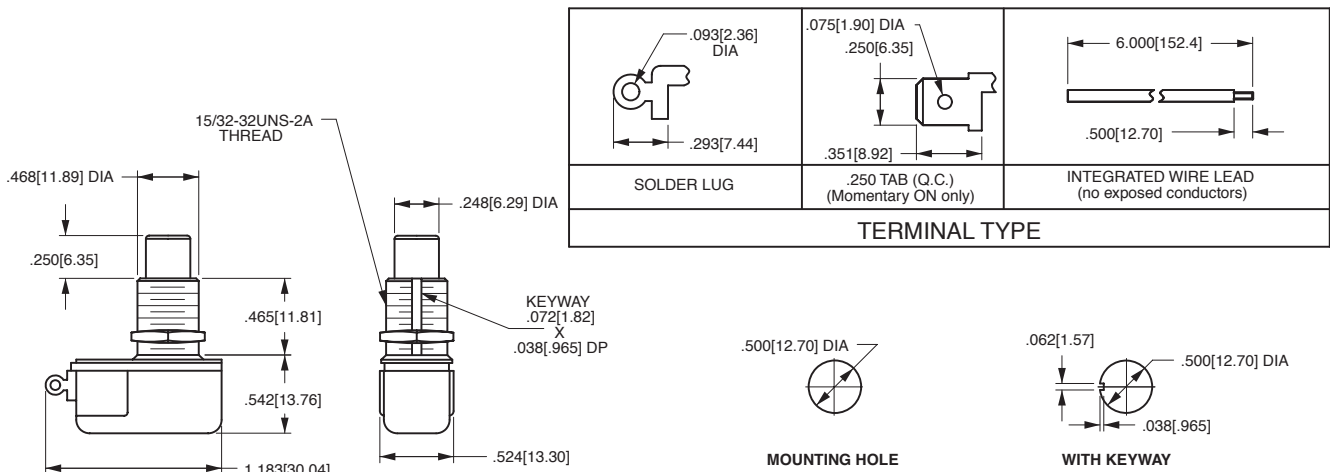

*Manufacturer reserves the right to change product specification without prior notice.