

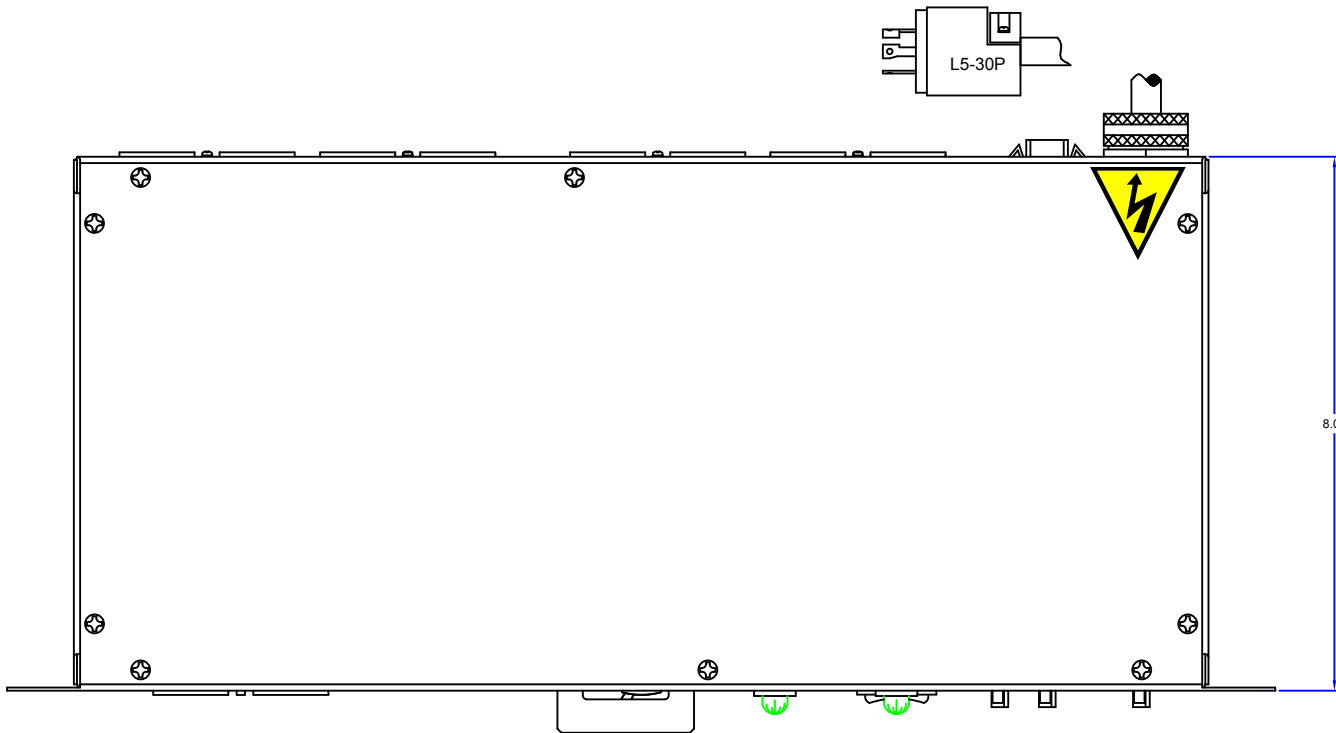


LT#	ECCO No.	REVISION	DR	CK	AP	DATE
C	NONE	CHG TO 345 BD	WW			06/23/98
D	NONE	ADD CB KCKGRD	CL		GH	08/01/00
E	6626	CHG. SILKSCREEN	LS		DK	30 OCT 01
F	7994	CORRECTED TEXT	LS		DK	22 SEP 04
G	8093	CORRECTED J#S	JK			03/23/05

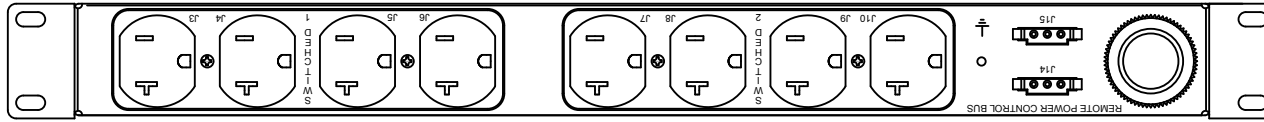


- RACK MOUNTED STEEL CHASSIS GOLD ZINC PLATED
19.00" WIDE STANDARD RACK MOUNTING
1.72" HIGH
8.00" DEEP
NOTE: CHASSIS SUPPORT BRACKETS OR SLIDES ARE REQUIRED
- INPUT: 125 VAC, SINGLE PHASE, 50/60 HZ.
24A MAXIMUM TOTAL CURRENT
POWER CABLE: 15FT, 10/3 CABLE WITH L5-30 PLUG
- OUTPUT: TEN NEMA 5-20R RECEPTACLES
2, UNSWITCHED, ALWAYS ON
8, SWITCHED, ACTIVATED BY ON/OFF/REMOTE SWITCH
- CIRCUIT BREAKER: MAGNETIC, 2 POLE 15 AMP
HIGH-INRUSH TIME DELAY CURVE
- INDICATOR LIGHTS: 3 GREEN
POWER IS ON WHEN BREAKER IS ON
1 FOR EACH SWITCHED SECTION
- FILTER: EMI/RFI, 30AMP RATING, 50/60 HZ
COMMON MODE, LINE TO GROUND
DIFFERENTIAL MODE, LINE TO LINE.
- SPIKE/SURGE PROTECTION
COMMON MODE, LINE TO GROUND
DIFFERENTIAL MODE, LINE TO LINE.
- REMOTE I/O SWITCHING CONNECTOR:
5 EACH, 3 PIN AMP CONNECTOR
MATE WITH AMP #1-480305-0 CONNECTOR
WITH AMP # 60620-1 PINS.



REMOTE START REQUIRES 2 CONDITIONS:
 1) MAINTAINED CONTACT BETWEEN PINS 2 & 3
 2) MOMENTARY CONTACT BETWEEN PINS 1 & 3
 REMOTE EPO REQUIRES ONE (1) CONDITION:
 1) OPENING OF MAINTAINED CONTACT BETWEEN PINS 2 & 3
 THIS TURNS OFF SWITCHED OUTLETS REGARDLESS OF REMOTE SWITCH POSITION.
NOTE: EVEN IN LOCAL MODE, THERE MUST BE A MAINTAINED CLOSURE BETWEEN PINS 2 & 3 FOR THE UNIT TO FUNCTION.
 FOR START UP OF ADDITIONAL "LT" UNITS:
 CONNECT PINS 1 & 2 ON J13 (SEQUENCE PORT) TO ANY OTHER REMOTE PORT ON ANOTHER "LT" UNIT.
DO NOT CONNECT TO ANOTHER SEQUENCE PORT.

- U.L. RECOGNIZED.

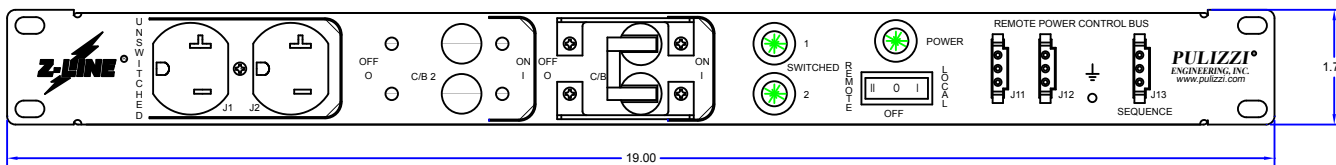

THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF PULIZZI ENGINEERING INC. PULIZZI ENGINEERING INC. RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS THERETO, AND TO ANY ARTICLE DISCLOSED THEREIN, EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY PARTS. COPYRIGHT 2001 P.E.L.

		PULIZZI ENGINEERING INC. 3290 S. Susan Street, Santa Ana, CA 92704 (714) 540-4229 Fax (714) 641-9062	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES:		TITLE ENGINEERING DRAWING FOR TPC115-10-D-LT ASSY 2586	
FRACTIONS: 1/32 DECIMALS: .000 ANGLES: 0.010	SHEET: 1 OF 1 SCALE: 1:1 SIZE: D	DRAWING NAME: TPC_115-10-D-LT_2586G_ME.DWG DRAWING:	REV: 0