



A Tallysman Accutenna™ TW4500 Wideband Dual Feed Globalstar™ Antenna



The TW4500 employs Tallysman's unique Accutenna™ technology in a compact magnetic mount, passive Left Hand Circularly Polarised antenna (LHCP) for the 1610 to 1620 MHz frequency band, specifically designed to maximise the performance of the Globalstar™ STU (Simplex Transmit Unit) modems.

The wideband dual feed patch element in the TW4500 has an excellent axial ratio across the entire Globalstar™ bandwidth. Unlike single feed antennas, the TW4500 provides excellent multipath rejection and a truly circular transmission response across the Globalstar™ band.

The TW4500 is the smallest dual feed, high performance Globalstar™ antenna available. It is housed in a compact IP67 magnetic mount enclosure. It is available with a 50cm coaxial cable that allows for an STU modem to be mounted away from the weather, yet still provide excellent Globalstar™ coverage.

Applications

- Simplex Transmit Unit (STU) Applications
- Sea & Land Container Tracking
- Military & Security
- Fleet Management & Asset Tracking
- Marine & Avionics Systems
- Law Enforcement & Public Safety

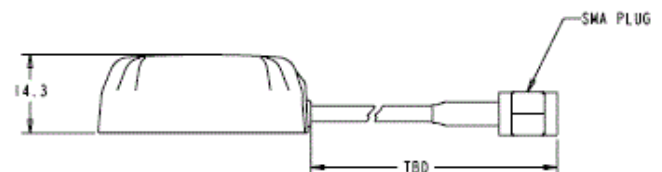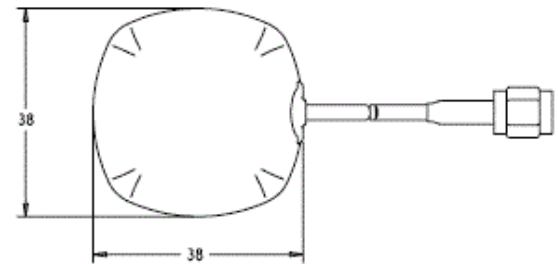

Features

- Novel 25mm, wideband dual feed patch
- 4.25 dBic Gain on 100mm Ground plane.
- Great axial ratio, <3 dB over full bandwidth
- Weather proof, IP67 housing
- Low Cost all-plastic housing
- Magnetic mount
- Wide range of connector options

Benefits

- Truly circular polarized signal transmission
- Environment tolerant tuning
- Truly circular with great multipath rejection
- Industrial temperature range
- Rugged Design
- No compromise for cost sensitive applications
- RoHS compliant



TW4500 Wideband Dual Feed Globalstar™ Antenna

Specifications Over full bandwidth, T=25°C

Antenna

Architecture	Dual, quadrature feeds
Antenna Gain (100mm ground plane)	4.25dBic
Axial Ratio (over full bandwidth)	≤3dB
1.0 dB Bandwidth	1600MHz to 1630MHz

Electrical

Architecture	Dual Feed Patch -> Hybrid 90° Combiner
Polarization	LHCP
Gain flatness	≤1dB, from 1610MHz to 1620MHz
VSWR (at antenna)	<1.5:1
Return Loss (-10 dB bandwidth)	<-20MHz
ESD Circuit protection	15KV air discharge

Mechanicals & Environmental

Mechanical Size	38mm x 38mm dia. x 14.3mm High
Connectors	SMA male standard, others available
Cable	RG174
Operating Temp. Range	-40°C to +85°C
Enclosure	Radome and base: ASA plastic
Weight	Enclosure + SMA connector 34gm, cable 0.31gm/cm)
Attachment Method	Magnetic
Environmental	IP67 and RoHS compliant
Shock	Vertical axis: 50G, other axes: 30G
Vibration	3 axis, sweep = 15 min, 10 to 200Hz sweep: 3G
Warranty	One year, parts and labour

Ordering Information

Legacy Part Numbers:

TW4500 – Dual Feed, Wideband, Globalstar™ Antenna, 32-4500-xx-yyyy
Connector: xx = 00 SMA male, 01 = TNC male 02 = MCX male 03 = MMCX male 04 = SMB male
05 = MCX right angle male 06 = MMCX right angle male 07 = SMA female 08 = H.FL** 09 = U.FL
10 = SMA R/A** 11 = Reverse polarity SMA** ** Premiums apply. Please contact your Distributor

Cable length: yyyy = cable length in mm

* As a result of a growing product portfolio, Tallysman has rationalized its part number system. No changes have been made to the mechanical or electrical properties of these products. Where administratively possible, please use the following new Part Numbers.

TW4500 – Dual Feed, Wideband, Globalstar™ Antenna 33-4500-xx-yyyy

Please refer to the Ordering Guide (<http://www.tallysman.com/orderingguide.php>) for the current and complete list of available radomes and connectors.

Tallysman Wireless Inc

106 Schneider Road, Unit 3

Ottawa ON K2K 1Y2 Canada

Tel 613 591 3131

Fax 613 591 3121

sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. ©

2010 Tallysman Wireless Inc. All rights reserved.

Rev 3