




# ASSEMBLY INSTRUCTION

## NC10FRX & NC10MRX | XLR Cable Connector

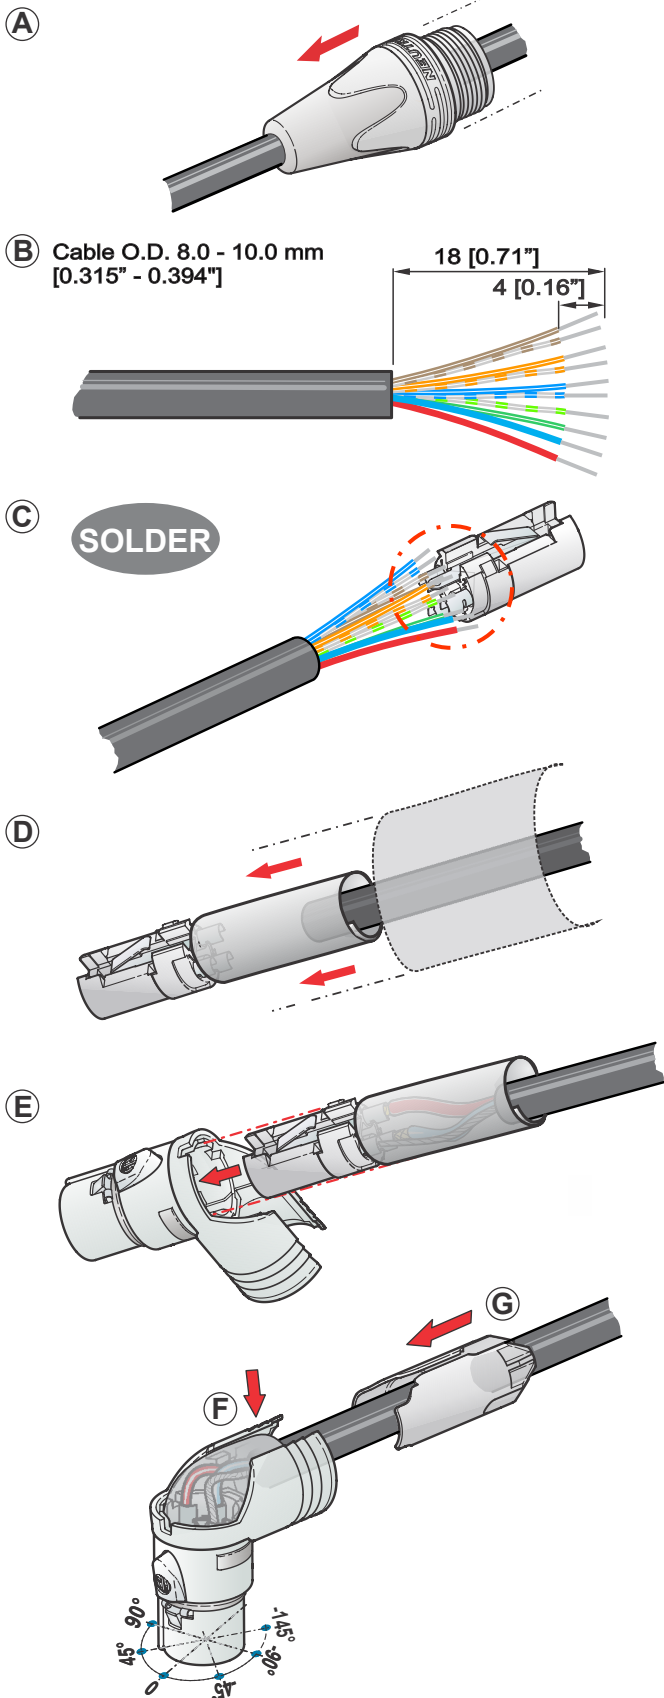

- (A)** Slide the boot onto the cable.
- (B)** Prepare the cable as shown.
- (C)** Insert the wires into the terminals and solder them.


Wiring suggestion under consideration of EIA/ TIA 568 A/B.

Solder side!	Connection		PIN No.
	T568A	T568B	
Female	W - G	W - O	1
	G	O	2
	W - O	W - G	3
	BL	BL	4
	W - BL	W - BL	5
	O	G	6
	W - BR	W - BR	7
	BR	BR	8
Power DC			
	+		9
	-		10
Male			


- (D)** Position the sleeve over the wires.
- (E)** Slide the insert into the housing until it snaps in place.  
*Align the insert with the housing.*
- (F)** Position the cable.
- (G)** Slide the chuck into the housing.  
*Pay attention to position the chuck as shown.*


5 selectable cable outlet positions on female & 7 position on male connectors.

Female:



Male:



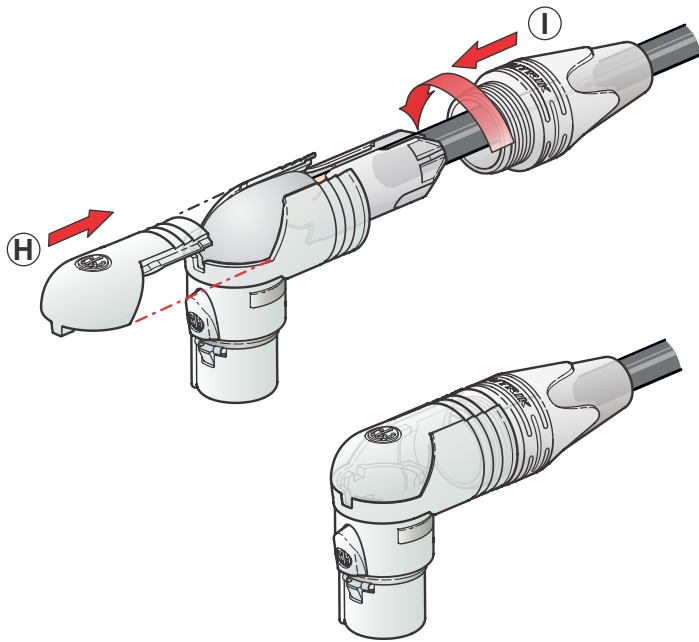


**H** Position the cover.

Before placing the cover choose the orientation of cable outlet by turning housing.

**I** Finish the assembly by turning the bushing onto the connector.

OPTION:

Use the handtool HTXX-14 to tighten the bushing.

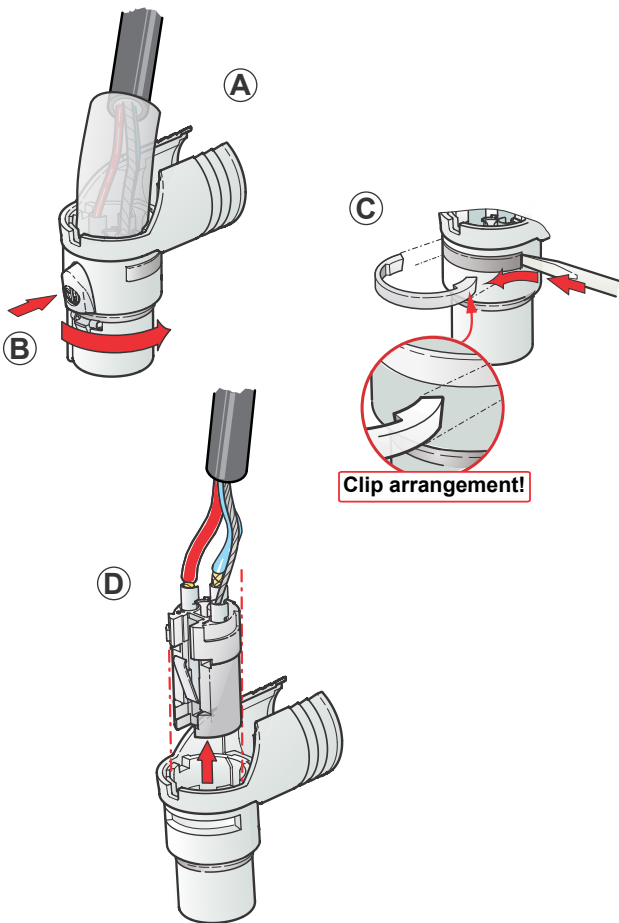

### Disassembly of the insert

**A** Remove the cover and the chuck.

**B** Push the latch and turn the housing approx. a half turn until housing can be separated.

**C** Lift the locking clip by help of a screw driver.

**D** Remove the insert.

NEUTRIK AG LI T: +423/237 24 24 F: +423/232 53 93  
 NEUTRIK USA Inc. USA T: +1 704 / 972 3050 F: +1 704/438 9202  
 NEUTRIK (UK) Ltd. UK T: +44 1983 / 811 441 F: +44 1983/811 439  
 NEUTRIK Vertriebs GmbH DE/NL/AT/DK T: +49 8131 / 280 890 F: +49 8131/280 830

NEUTRIK France FR T: +33 1/4131 6750 F: +33 1/4131 0511  
 NEUTRIK Tokyo Ltd. JP T: +81 3/3663 4733 F: +81 3/3663 4796  
 NEUTRIK Hong Kong Ltd. HK T: +852/2687 6055 F: +852/2687 6052  
 NEUTRIK India Pvt. Ltd. IND T: +91/982 05 43 424 F: +91/22 26163 540

Draft. Nr.: BDA 484 | Update: 29.03.2016 | Data subject to change without prior notice. ©2016 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® are registered trademark.