



Iss 1 10/01/12

PRODUCT DATASHEET

200VA Chassis MOUNTED TRANSFORMER



Designed, Manufactured and tested in accordance with **BS415**Dual Primaries, for 110, 220 and 240V Inputs
Comprehensive choice of Secondary Voltages
4KV Isolation Primary to Secondary
Fully shrouded double section construction

Weight	2.7	Kg
Typical Regulation	8	%
Frequency	50/60	Hz
Max Ambient	25	°C
Bobbin Material	UL94-HB Class "B" 130°C	

Part Numbers

Part No	Primary	Secondary	Recommended Secondary Fuse
D3687	0-110 0-110-130V	9+9V	10.0AT
D3688	0-110 0-110-130V	12+12V	8.0AT
D3689	0-110 0-110-130V	15+15V	6.3AT
D3690	0-110 0-110-130V	18+18V	5.0AT
D3691	0-110 0-110-130V	20+20V	5.0AT
D3692	0-110 0-110-130V	24+24V	4.0AT
D3693	0-110 0-110-130V	30+30V	3.15AT
D3694	0-110 0-110-130V	50+50V	2.0AT

Please see sheet 2 for dimensions, pin outs and connection information.


Dagnall Electronics Ltd Tel: +44 (0)117 230 2240 sales@dagnall.co.uk www.dagnall.co.uk TRX Electronics Ltd Tel: (00356)21 663011 info@trxelectronics.com www.trxelectronics.com







PRODUCT DATASHEET

200VA CHASSIS MOUNTED TRANSFORMER

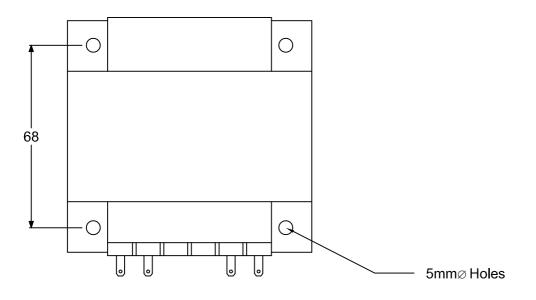

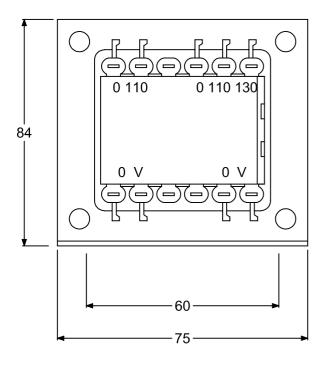

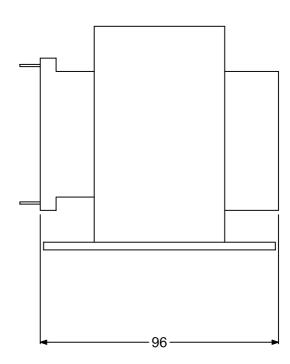

Dagnall Electronics Ltd Tel: +44 (0)117 230 2240 sales@dagnall.co.uk www.dagnall.co.uk TRX Electronics Ltd Tel: (00356)21 663011 info@trxelectronics.com www.trxelectronics.com

THIS DOCUMENT IS THE PROPERTY OF DAGNALL ELECTRONICS LIMITED AND TRX ELECTRONICS LIMITED. IN THE INTEREST OF TECHNICAL IMPROVEMENT AND/OR CUSTOMER SERVICE DAGNALL ELECTRONICS RESERVES THE RIGHT TO INTRODUCE MODIFIED SPECIFICATIONS TO ANY OF THE PRODUCTS ILLUSTRATED OR DESCRIBED IN THIS DATASHEET. E&OE






PRODUCT DATASHEET

200VA CHASSIS MOUNTED TRANSFORMER

Connection Diagrams for D3687

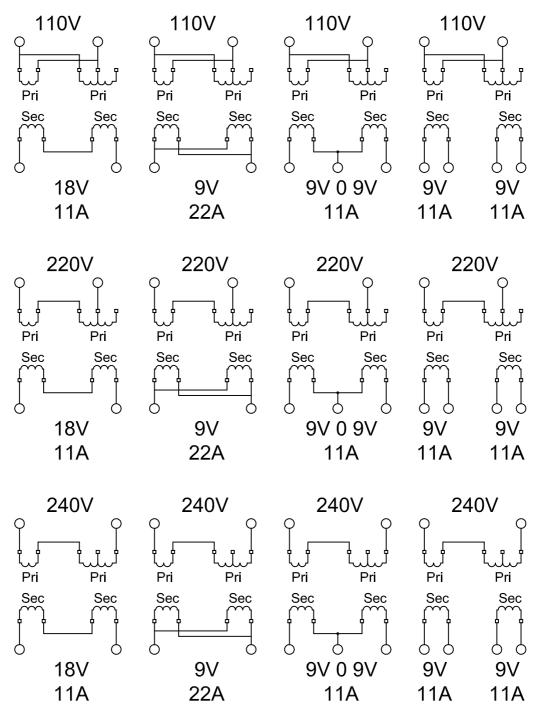

Dagnall Electronics Ltd Tel: +44 (0)117 230 2240 sales@dagnall.co.uk www.dagnall.co.uk TRX Electronics Ltd Tel: (00356)21 663011 info@trxelectronics.com www.trxelectronics.com