


Datamate J-Tek Connectors

Female Crimp Kit - Extended Wall

- ❖ Extended Wall Datamate allows back potting to be performed.
- ❖ Polarised mouldings.
- ❖ Crimp contacts are rear insertable.
- ❖ Large bore 22 AWG, small bore 24 - 28 AWG.
- ❖ Part numbers are for a housing and the equivalent number of contacts.

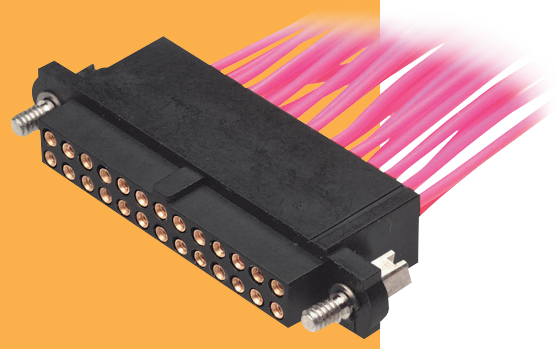

DATAMATE J-TEK

WITHOUT JACKSCREWS	WITH JACKSCREWS																
<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">CALCULATION</th> </tr> </thead> <tbody> <tr> <td style="background-color: #f4a460;">A</td> <td>B + 12</td> </tr> <tr> <td style="background-color: #f4a460;">B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td style="background-color: #f4a460;">C</td> <td>B + 7</td> </tr> </tbody> </table>	CALCULATION		A	B + 12	B	Total no. of contacts - 2	C	B + 7									
CALCULATION																	
A	B + 12																
B	Total no. of contacts - 2																
C	B + 7																
TOOLS	WIRE STRIPPING DETAILS																
<p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - T5747</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> ❖ Spare and pre-cabled contacts shown on following pages. ❖ Instruction sheets available at www.harwin.com/instructions. 																	
HOW TO ORDER																	
M80 - XXX XX XX																	
SERIES CODE	WALL SIZE																
<table border="1"> <thead> <tr> <th style="background-color: #f4a460;">LARGE BORE (22 AWG)</th> <th style="background-color: #f4a460;">SMALL BORE (24-28 AWG)</th> <th></th> </tr> </thead> <tbody> <tr> <td style="background-color: #f4a460;">475</td> <td style="background-color: #f4a460;">476</td> <td>Without Jackscrews</td> </tr> <tr> <td style="background-color: #f4a460;">465</td> <td style="background-color: #f4a460;">466</td> <td>With Hex Slotted Jackscrews</td> </tr> <tr> <td style="background-color: #f4a460;">485</td> <td style="background-color: #f4a460;">486</td> <td>With Hex Socket Jackscrews</td> </tr> </tbody> </table>	LARGE BORE (22 AWG)	SMALL BORE (24-28 AWG)		475	476	Without Jackscrews	465	466	With Hex Slotted Jackscrews	485	486	With Hex Socket Jackscrews	<table border="1"> <tbody> <tr> <td style="background-color: #f4a460;">BLANK</td> <td>Wall = 5mm</td> </tr> <tr> <td style="background-color: #f4a460;">A</td> <td>Wall = 1mm</td> </tr> </tbody> </table>	BLANK	Wall = 5mm	A	Wall = 1mm
LARGE BORE (22 AWG)	SMALL BORE (24-28 AWG)																
475	476	Without Jackscrews															
465	466	With Hex Slotted Jackscrews															
485	486	With Hex Socket Jackscrews															
BLANK	Wall = 5mm																
A	Wall = 1mm																
	FINISH																
	<table border="1"> <tbody> <tr> <td style="background-color: #f4a460;">05</td> <td>Gold</td> </tr> <tr> <td style="background-color: #f4a460;">42</td> <td>Gold + Tin</td> </tr> </tbody> </table>	05	Gold	42	Gold + Tin												
05	Gold																
42	Gold + Tin																
	TOTAL NO. OF CONTACTS																
	06, 10, 12, 14, 18, 20, 26, 34, 42, 50																

All dimensions in mm.