


Datamate L-Tek Connectors

Female Crimp Kit

- Part numbers are for a complete kit of a housing and the applicable number of contacts.
- Contacts are rear insertable.
- Spare contacts are available – see the following page.

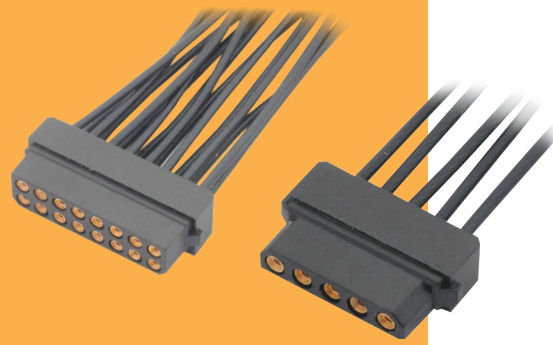

DATAMATE L-TEK

SINGLE ROW	CALCULATION	DOUBLE ROW	CALCULATION																						
	A B + 5.15		A B + 5.15																						
	B (Total no. of contacts - 1) x 2		B Total no. of contacts - 2																						
TOOLS	WIRE STRIPPING DETAILS																								
<p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - T5747</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> Spare and pre-cabled contacts shown on following pages. Instruction sheets available at www.harwin.com/instructions. 																									
HOW TO ORDER																									
M80 - XXX XX XX																									
SERIES CODE	TOTAL NO. OF CONTACTS		FINISH																						
<table border="1"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">TYPE</th> </tr> </thead> <tbody> <tr> <td>798</td> <td>Single Row, Extra Small Bore (28-32 AWG)</td> </tr> <tr> <td>898</td> <td>Single Row, Small Bore (24-28 AWG)</td> </tr> <tr> <td>899</td> <td>Single Row, Large Bore (22 AWG)</td> </tr> <tr> <td>788</td> <td>Double Row, Extra Small Bore (28-32 AWG)</td> </tr> <tr> <td>888</td> <td>Double Row, Small Bore (24-28 AWG)</td> </tr> <tr> <td>889</td> <td>Double Row, Large Bore (22 AWG)</td> </tr> </tbody> </table>	TYPE		798	Single Row, Extra Small Bore (28-32 AWG)	898	Single Row, Small Bore (24-28 AWG)	899	Single Row, Large Bore (22 AWG)	788	Double Row, Extra Small Bore (28-32 AWG)	888	Double Row, Small Bore (24-28 AWG)	889	Double Row, Large Bore (22 AWG)	<table border="1"> <tbody> <tr> <td>02 to 07, 17</td> <td>Single Row</td> </tr> <tr> <td>04, 06, 08, 10, 12, 14, 16, 18, 20, 26, 34</td> <td>Double Row</td> </tr> </tbody> </table>		02 to 07, 17	Single Row	04, 06, 08, 10, 12, 14, 16, 18, 20, 26, 34	Double Row	<table border="1"> <tbody> <tr> <td>01</td> <td>Gold + Tin</td> </tr> <tr> <td>05</td> <td>Gold</td> </tr> </tbody> </table>	01	Gold + Tin	05	Gold
TYPE																									
798	Single Row, Extra Small Bore (28-32 AWG)																								
898	Single Row, Small Bore (24-28 AWG)																								
899	Single Row, Large Bore (22 AWG)																								
788	Double Row, Extra Small Bore (28-32 AWG)																								
888	Double Row, Small Bore (24-28 AWG)																								
889	Double Row, Large Bore (22 AWG)																								
02 to 07, 17	Single Row																								
04, 06, 08, 10, 12, 14, 16, 18, 20, 26, 34	Double Row																								
01	Gold + Tin																								
05	Gold																								

All dimensions in mm.