

## **BNC keystone coupler 50 Ohm**



The  $50\Omega$  BNC keystone jack is designed to support CCTV and NTSC analog video signals, as well as any application requiring  $50\Omega$  BNC connectors. It is designed to snap into any standard sized keystone outlets and patch panels.

#### **Features**

- 50Ω feed through female to female connector
- Nickel plating for improved performance with superior signal quality with minimal noise
- Provides a clean and neat appearance installation
- Snap in keystone jack provides a fast and easy installation
- Designed to fit industry standard keystone outlets and patch panels
- Black and white versions available to match panel or faceplate colour
- Only designed for RF analog signals and  $50\Omega$  data cables. For digital and HD video signals the KBNC75 should be used
- Also available as part of our panel mount and D UNIVERSAL ranges


#### **Specifications**


- Dimensions: 32.5x16.85x21mm (LxWxH)
- Weight: approx. 16.34g
- Materials
  - ➤ Keystone housing: ABS UL94V-0
  - Adaptor body: tarnish resistant nickel plated brass
  - Centre contact: gold plated zinc alloy
  - Insulator: PP
- Impedance: 50Ω & Frequency: 0 4 GHz
- Packaging: Supplied in individual polythene bags, then in bags of 20



#### **ROHS Compliant**

# Code: KBNC50bk/wh

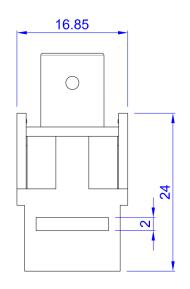

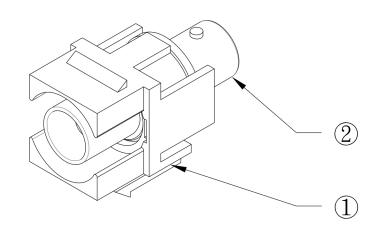

### Connector specifications:

- 1. Keystone adaptor material: ABS UL94V-0 available in black or white
- 2. BNC connector: body: tarnish resistant nickel plated brass

Contact material: gold plated zinc alloy

Impedance: 50 ohm Frequency: 0 - 4GHz

Insulator: PP

