

Description: 868MHz PCB SMT Antenna

### Series: Domino

PART NUMBER: W3329

### **Features:**

- 868MHz ISM antenna
- Size 21.85 x 5 x 3 mm
- Efficiency 60%
- Nominal impedance 50  $\Omega$
- Fully SMD and Reflow/IR/Wave- soldering compatible

## **Applications:**

- 868MHz radios
- M2M
- IoT
- SigFox
- LoRa

All dimensions are in mm / inches

#### Issue: 1801

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information: Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128

> USA Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998









Description: 868MHz PCB SMT Antenna

## Series: Domino

PART NUMBER: W3329

### **ELECTRICAL SPECIFICATIONS**

Frequency	868 MHz
Nominal Impedance	50Ω
Return loss	-10 dB
Total Efficiency	60 %
Peak Gain	0.17 dBi
Maximum power input	5 W

(\*) All RF parameters measured on Pulse reference test PCB



2



Description: 868MHz PCB SMT Antenna

## Series: Domino

PART NUMBER: W3329

MECHANICAL SPECIFICATIONS				
Color	Bla	ick		
Size(L X W X T)	21.85 x 5 x 3 mm	า		
Weight	1.3 g			
Fixing system	SMD			
MSL level	3			

ENVIRONME	ENVIRONMENTAL SPECIFICATIONS		
Operating temperature	-40/+85	° C	
Temperature	-40/+85	° C	
Humidity	93% RH @ 30° C	24 hours	
Drop test	1	m	

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



3




Description: 868MHz PCB SMT Antenna

Series: Domino

PART NUMBER: W3329

### **MECHANICAL DRAWING**

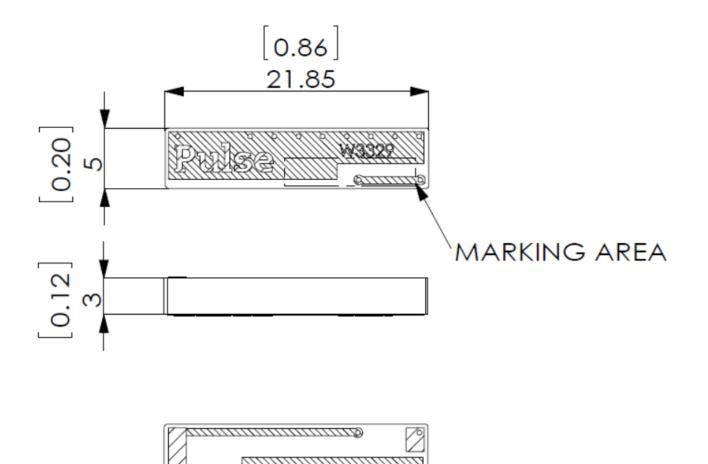

# DIMENSION UNIT IS [INCH]MM

#### Issue: 1801

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



4




Description: 868MHz PCB SMT Antenna


## Series: Domino

PART NUMBER: W3329

### **TEST SETUP**

# Pulse reference test PCB for W3329 antenna

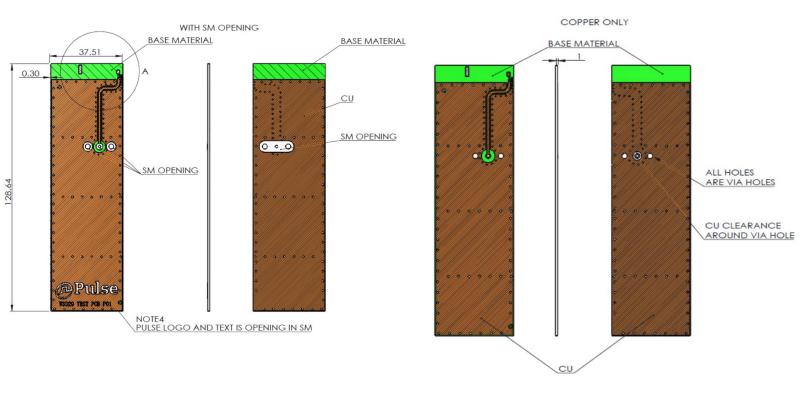

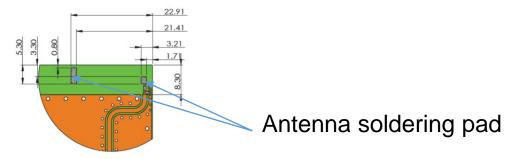

#### Issue: 1801

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



5




Description: 868MHz PCB SMT Antenna

Series: Domino

PART NUMBER: W3329

### **TEST SETUP**

PWB ground clearance area (Top):37.5x8.3mm PWB ground clearance area (Bottom):37.5x8.3mm

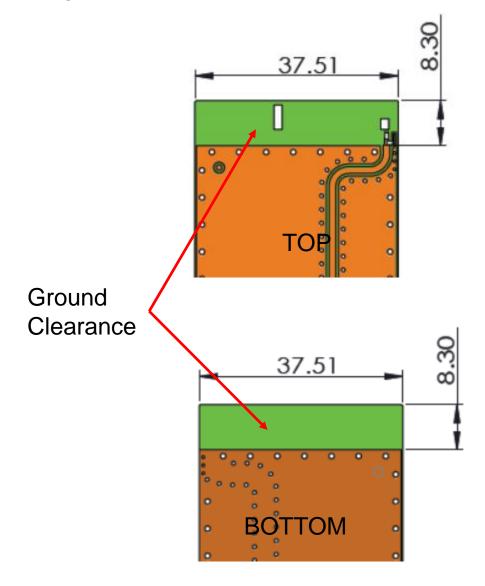

#### Issue: 1801

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION




6



Description: 868MHz PCB SMT Antenna

### Series: Domino

PART NUMBER: W3329

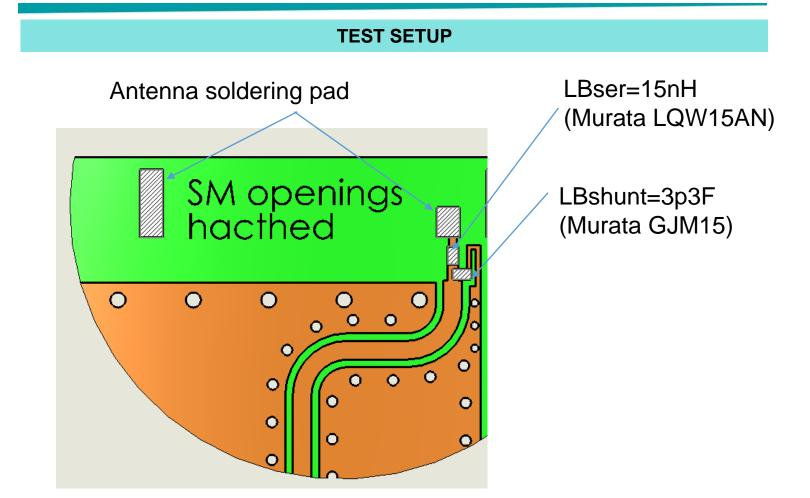

Recommended test board PCB layout for electrical characteristic measurement. Substrate material FR4, thickness 1mm

All dimensions are in mm

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



7



Description: 868MHz PCB SMT Antenna

### Series: Domino

PART NUMBER: W3329

### **TEST SETUP**

## **Recommendation for reflow soldering process**

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 30 sec
5	Peak temperature in reflow	230 °C for 10 seconds
6	Temperature gradient in cooling	Max -5 °C/s

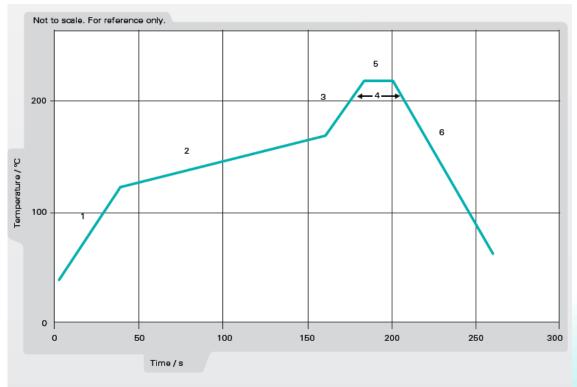


Figure 1. Minimum temperature profile recommendation for reflow soldering process

#### Issue: 1801

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



8



Description: 868MHz PCB SMT Antenna

## Series: Domino

### PART NUMBER: W3329

### **TEST SETUP**

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 60 sec
5	Time above 230 °C	Max 50 sec
6	Time above 250 °C	Max 10 sec
7	Peak temperature in reflow	260 °C for 5 seconds
8	Temperature gradient in cooling	Max -5 °C/s

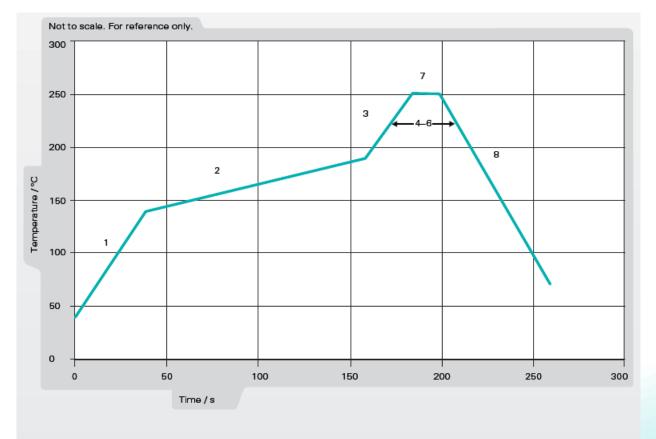


Figure 2. Maximum temperature profile recommendation for reflow soldering process

#### Issue: 1801

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



9




Description: 868MHz PCB SMT Antenna

## Series: Domino

PART NUMBER: W3329

### CHARTS

## **Return Loss**

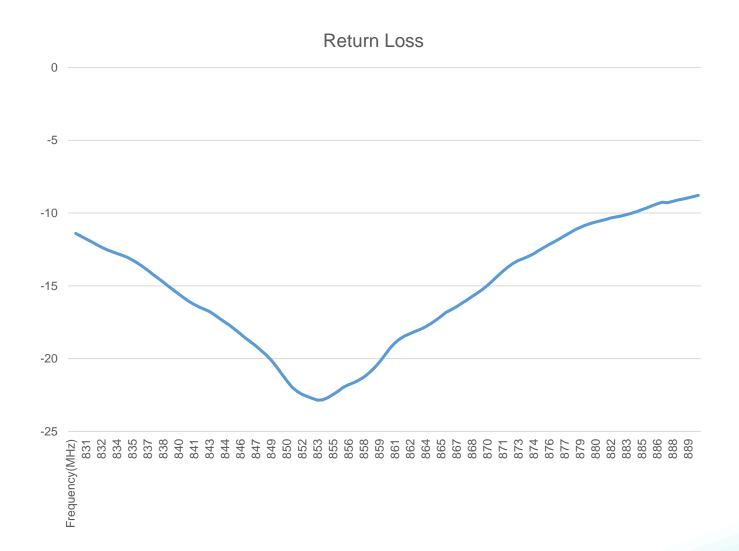

Issue: 1801

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

10




Description: 868MHz PCB SMT Antenna

### Series: Domino

PART NUMBER: W3329

### CHARTS

# Efficiency(%)

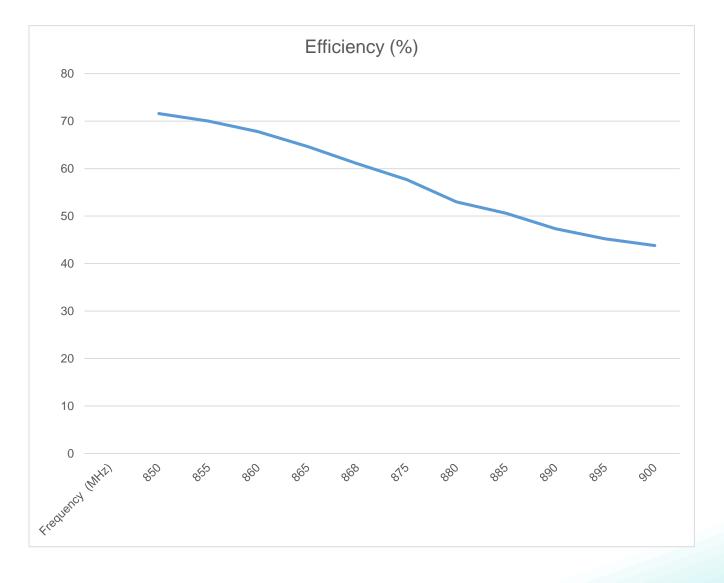

#### Issue: 1801

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: 868MHz PCB SMT Antenna

### Series: Domino

PART NUMBER: W3329

### CHARTS

# Peak Gain(dBi)



#### Issue: 1801

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: 868MHz PCB SMT Antenna

### Series: Domino


PART NUMBER: W3329


### CHARTS

## Free Space Radiation Pattern

**Elevation Plane** 

# Horizontal Plane

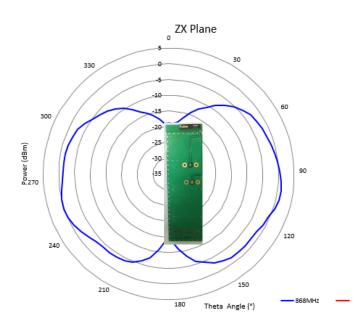

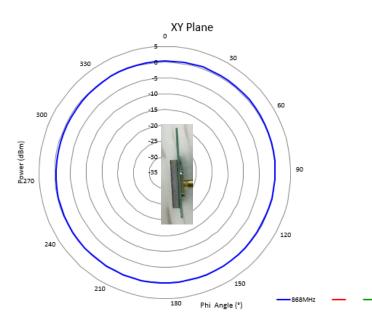

#### Issue: 1801

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: 868MHz PCB SMT Antenna

## Series: Domino

PART NUMBER: W3329

### PACKAGING

Reel packing, 1400PCS/reel 2 Reels/Carton box Total 2800PCS/Carton box



Issue: 1801

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

