


PCB Terminal Blocks and Connectors for Power Electronics

More Power on Your PCB



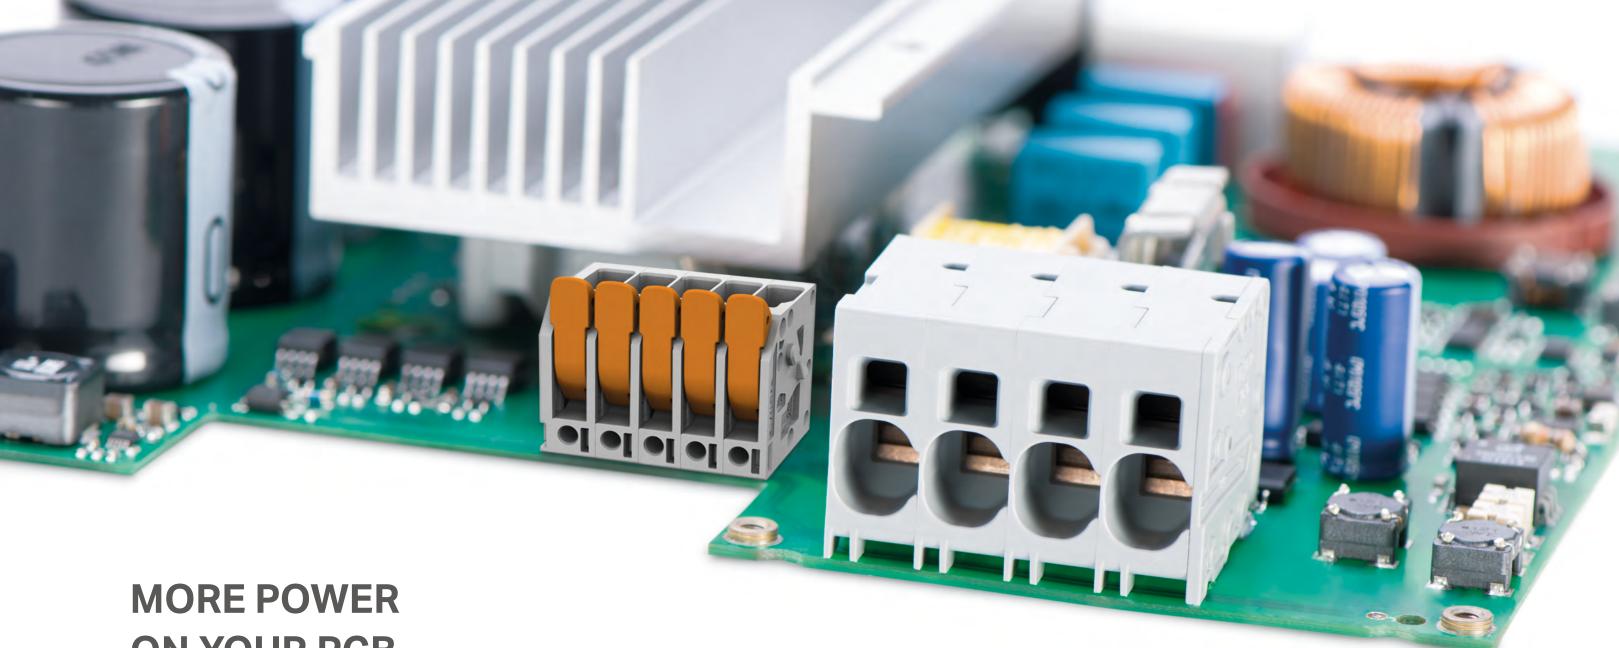

ON YOUR PCB

More Power No Longer Means More Space

The trend toward electronic miniaturization requires that both power and signal levels be integrated on PCBs. This results in increased power density, requiring connection technologies suited for both compact and high-perfomance PCB terminal blocks.

Connection technology is also a basic consideration for selecting the right terminal block in demanding applications, such as power supplies, frequency inverters or servo drives. Additional decision factors include ease of operation, as well as wiring flexibility.

Every Advantage - All in One

The wide range of PCB terminal blocks for power electronics combines all of these features. PCB terminal blocks are available in three sizes, rated for maximum wire sizes of 10, 8, and 4 AWG respectively. PCB Connectors with lever operation are available in two sizes, rated for maximum wire sizes of 8 and 4 AWG respectively. Most components are footprint compatible to existing solutions, but surpass existing solutions in current capacity, wire range, and ease of handling.

Thanks to our innovative spring pressure connection technology, the PCB terminal blocks and connectors for all applications ideally blend ergonomics and safety. Push-in CAGE CLAMP® enables solid and ferruled conductors to be connected by simply pushing them into the unit, while guaranteeing secure and maintenance-free connections for all conductor types. Furthermore, the power electronics interconnect range is not only simple and easy to use, but also offers maximum wiring flexibility.



Advantages:

- Comprehensive product range from 24 to 4 AWG
- Push-in CAGE CLAMP® termination
- higher current carrying capacity
- Wire horizontally or vertically to the PCB

PCB TERMINAL BLOCKS WITH Push-in CAGE CLAMP®

2624, 2626, 2636 Series

PCB terminal blocks with Push-in CAGE CLAMP® are ideal for compact device connections. Push-in CAGE CLAMP® is suitable for all conductor types and enables solid and ferruled conductors to be connected by simply pushing them into the unit. Tool-actuated termination is performed parallel to conductor entry. PCB terminal blocks terminate conductors either horizontally or vertically to the PCB. Furthermore, they can be tested both parallel and perpendicular to conductor entry.

Advantages:

- Compact device connection
- Ideal for panel feedthrough and space-restricted applications
- Operation parallel to conductor entry
- Footprint and dimensional compatibility with existing solutions
- For applications complying with EN and UL 61800-5-1 (details upon request)



Conductor Range:

AWG	24	22	20	18	16	14	12	10	8	6	4	AWG
2624 Series	All cond	uctor typ	es									Pin spacing: 5 / 7.5 / 11.5 mm
2626 Series			All cond	luctor typ	es							Pin spacing: 7.5 mm
2636 Series				All cond	luctor typ	es						Pin spacing: 10 mm

PCB TERMINAL BLOCKS WITH Push-in CAGE CLAMP® AND LEVER

2604, 2606, 2616 Series

Lever-equipped PCB terminal block variants offer faster and easier wiring. They combine a compact design, high current carrying capacity and the advantages of Push-in CAGE CLAMP® with the additional benefits of intuitive lever operation.

The lever permits 100% tool-free operation and provides a secure connection when the easy-to-use lever closes the clamping unit. The lever also clearly locks in position (open/close) with a tactile and audible click. PCB terminal blocks with lever terminate conductors either horizontally or vertically to the PCB. Furthermore, they can be tested both parallel and perpendicular to conductor entry.

Advantages:

- Faster and easier wiring
- Tool-free, intuitive lever operation
- Effortlessly return lever to closed position for secure connection
- Lever clearly locks in position (open/close)



Conductor Range:

AWG	24	22	20	18	16	14	12	10	8	6	4	AWG
2604 Series	ries All conductor types								Pin spacing: 5 / 7.5 / 11.5 mm			
2606 Series			All cond	uctor typ	es							Pin spacing: 7.5 mm
2616 Series				All cond	uctor typ	es						Pin spacing: 10 mm

2624 SERIES

- PCB terminal block (10 AWG max.) with Push-in CAGE CLAMP® termination
- Push-in termination of solid, ferruled, and rigid-stranded conductors
- Test ports both parallel and perpendicular to conductor entry
- 5 mm, 7.5 mm, or 11.5 mm pin spacing
- Side entry or top entry versions
- Ideal for panel feedthrough applications as operation is parallel to conductor entry





Insert solid or ferruled conductors via push-in termination




Insert fine-stranded conductors and remove all conductors via operating tool



PCB terminal block for panel feedthrough connections

2624 Series							
Pin Spacing	5 mm	7.5 mm	11.5 mm	Conductor D	ata		
Ratings per	UL 1059			Connection 1	Connection Technology		CLAMP®
Use Group B	26 A	26 A	26 A	Conductor Range		24 - 10 AWG	
Ose Group B	300 V	300 V	600 V	Strip Length		10 - 12 mm	
Use Group C	-	26 A 150 V	26 A 600 V	Solder Pin Data			
Use Group D	26 A 300 V	26 A 300 V	-	Solder Pin Length		4 mm	
Maximum Operating Temp.	120 °C			Solder Pin Dimensions		0.8 x 1 mm	
Flammability Class per UL94	V0			Drilled Hole Diameter		1.3 ^{+0.1} mm	
Pole No.	Item No.						
Pin Spacing	5 mm	7.	5 mm	11.5 mm	5 mm	7.5 mm	11.5 mm
	Side Entr	У			Top Entry		
1	Side Entr 2624-110				Top Entry 2624-3101		
1 2)1	324-1302	2624-1502		2624-3302	2624-3502
	2624-110	01 26	624-1302 624-1303	2624-1502 2624-1503	2624-3101	2624-3302 2624-3303	2624-3502 2624-3503
2	2624-110 2624-110)1)2 26)3 26			2624-3101 2624-3102		
3	2624-110 2624-110 2624-110	01 02 26 03 26 04 26	624-1303	2624-1503	2624-3101 2624-3102 2624-3103	2624-3303	2624-3503
2 3 4	2624-110 2624-110 2624-110 2624-110	01 02 03 26 03 26 04 26 26	624-1303 624-1304	2624-1503 2624-1504	2624-3101 2624-3102 2624-3103 2624-3104	2624-3303 2624-3304	2624-3503 2624-3504
2 3 4 5	2624-110 2624-110 2624-110 2624-110	01 02 03 03 26 04 26 05 26 06 26	624-1303 624-1304 624-1305	2624-1503 2624-1504 2624-1505	2624-3101 2624-3102 2624-3103 2624-3104 2624-3105	2624-3303 2624-3304 2624-3305	2624-3503 2624-3504 2624-3505
2 3 4 5 6	2624-110 2624-110 2624-110 2624-110 2624-110	011	624-1303 624-1304 624-1305 624-1306	2624-1503 2624-1504 2624-1505 2624-1506	2624-3101 2624-3102 2624-3103 2624-3104 2624-3105 2624-3106	2624-3303 2624-3304 2624-3305 2624-3306	2624-3503 2624-3504 2624-3505 2624-3506
2 3 4 5 6 7	2624-110 2624-110 2624-110 2624-110 2624-110 2624-110	01 02 03 03 04 05 06 06 06 08	624-1303 624-1304 624-1305 624-1306 624-1307	2624-1503 2624-1504 2624-1505 2624-1506 2624-1507	2624-3101 2624-3102 2624-3103 2624-3104 2624-3105 2624-3106 2624-3107	2624-3303 2624-3304 2624-3305 2624-3306 2624-3307	2624-3503 2624-3504 2624-3505 2624-3506 2624-3507
2 3 4 5 6 7 8	2624-110 2624-110 2624-110 2624-110 2624-110 2624-110 2624-110	101	624-1303 624-1304 624-1305 624-1306 624-1307 624-1308	2624-1503 2624-1504 2624-1505 2624-1506 2624-1507 2624-1508	2624-3101 2624-3102 2624-3103 2624-3104 2624-3105 2624-3106 2624-3107 2624-3108	2624-3303 2624-3304 2624-3305 2624-3306 2624-3307 2624-3308	2624-3503 2624-3504 2624-3505 2624-3506 2624-3507 2624-3508
2 3 4 5 6 7 8	2624-110 2624-110 2624-110 2624-110 2624-110 2624-110 2624-110	011	324-1303 324-1304 324-1305 324-1306 324-1307 324-1308 324-1309	2624-1503 2624-1504 2624-1505 2624-1506 2624-1507 2624-1508 2624-1509	2624-3101 2624-3102 2624-3103 2624-3104 2624-3105 2624-3106 2624-3107 2624-3108 2624-3109	2624-3303 2624-3304 2624-3305 2624-3306 2624-3307 2624-3308 2624-3309	2624-3503 2624-3504 2624-3505 2624-3506 2624-3507 2624-3508 2624-3509

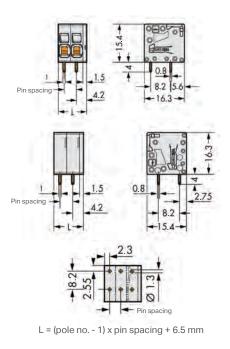

For CAD model and PCB library downloads, go to www.wago.us/2624

2604 SERIES

- PCB terminal block (12 AWG max.) with Push-in CAGE CLAMP® and lever termination
- 100% tool-free intuitive operation
- Push-in termination of solid, ferruled, and rigid-stranded conductors
- Test ports both parallel and perpendicular to conductor entry
- Connection is secured when lever is effortlessly lowered into closed position
- Lever locks into position (open/closed) with an audible click
- Side entry or top entry versions





Insert solid or ferruled conductors via push-in termination




Insert fine-stranded conductors and remove all conductors via lever



PCB terminal block for power supplies, e.g.

2604 Series							
Pin Spacing	5 mm	7.5 mm	11.5 mm	Conductor D	ata		
Ratings per	UL 1059		Connection Technology		Push-in CAGE CLAMP® with lever		
Use Group B	20 A	20 A	20 A	Conductor Range		24 - 12 AWG	
ose Group B	300 V	300 V	600 V	Strip Length		9 - 11 mm	
Use Group C	-	20 A 300 V	20 A 600 V Solder Pin Data				
Use Group D	20 A 300 V	5 A 600 V	-	Solder Pin Length		4 mm	
Maximum Operating Temp.	120 °C	120 °C Solder Pin Dimensions		mensions	0.8 x 1 mm		
Flammability Class per UL94	V0	V0 Drilled Hole Diameter		1.3 ^{+0.1} mm			
Pole No.	Item No.	Item No.					
Pin Spacing	5 mm	7.	5 mm	11.5 mm	5 mm	7.5 mm	11.5 mm
	Side Entr	у			Top Entry		
1	2604-110	24					
) [2604-3101		
2	2604-110		04-1302	2604-1502	2604-3101 2604-3102	2604-3302	2604-3502
3	2604-110 2604-110	02 26	604-1302 604-1303	2604-1502 2604-1503		2604-3302 2604-3303	2604-3502 2604-3503
		02 26			2604-3102		
3	2604-110)2 26)3 26)4 26	04-1303	2604-1503	2604-3102 2604-3103	2604-3303	2604-3503
3 4	2604-110 2604-110	02 26 03 26 04 26 05 26	604-1303 604-1304	2604-1503 2604-1504	2604-3102 2604-3103 2604-3104	2604-3303 2604-3304	2604-3503 2604-3504
3 4 5	2604-110 2604-110 2604-110	02 26 03 26 04 26 05 26	604-1303 604-1304 604-1305	2604-1503 2604-1504 2604-1505	2604-3102 2604-3103 2604-3104 2604-3105	2604-3303 2604-3304 2604-3305	2604-3503 2604-3504 2604-3505
3 4 5 6	2604-110 2604-110 2604-110	202 26 203 26 204 26 205 26 206 26 207 26	604-1303 604-1304 604-1305 604-1306	2604-1503 2604-1504 2604-1505 2604-1506	2604-3102 2604-3103 2604-3104 2604-3105 2604-3106	2604-3303 2604-3304 2604-3305 2604-3306	2604-3503 2604-3504 2604-3505 2604-3506
3 4 5 6 7	2604-110 2604-110 2604-110 2604-110	202 26 203 26 204 26 205 26 207 26 208 26	604-1303 604-1304 604-1305 604-1306 604-1307	2604-1503 2604-1504 2604-1505 2604-1506 2604-1507	2604-3102 2604-3103 2604-3104 2604-3105 2604-3106 2604-3107	2604-3303 2604-3304 2604-3305 2604-3306 2604-3307	2604-3503 2604-3504 2604-3505 2604-3506 2604-3507
3 4 5 6 7	2604-110 2604-110 2604-110 2604-110 2604-110	202 26 203 26 204 26 205 26 206 26 207 26 208 26	004-1303 004-1304 004-1305 004-1306 004-1307	2604-1503 2604-1504 2604-1505 2604-1506 2604-1507 2604-1508	2604-3102 2604-3103 2604-3104 2604-3105 2604-3106 2604-3107 2604-3108	2604-3303 2604-3304 2604-3305 2604-3306 2604-3307 2604-3308	2604-3503 2604-3504 2604-3505 2604-3506 2604-3507 2604-3508
3 4 5 6 7 8	2604-110 2604-110 2604-110 2604-110 2604-110 2604-110	202 2602 2603 2604 2605 2606 2606 2609 2609 2600 2600 2600 2600	04-1303 04-1304 04-1305 04-1306 04-1307 04-1308	2604-1503 2604-1504 2604-1505 2604-1506 2604-1507 2604-1508 2604-1509	2604-3102 2604-3103 2604-3104 2604-3105 2604-3106 2604-3107 2604-3108 2604-3109	2604-3303 2604-3304 2604-3305 2604-3306 2604-3307 2604-3308 2604-3309	2604-3503 2604-3504 2604-3505 2604-3506 2604-3507 2604-3508 2604-3509

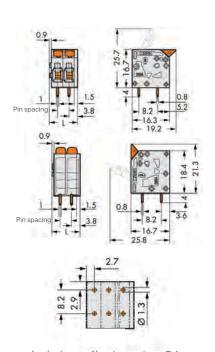

 $L = (pole no. - 1) \times pin spacing + 7.4 mm$

For CAD model and PCB library downloads, go to www.wago.us/2604

7

2626 SERIES

- PCB terminal block (8 AWG max.) with Push-in CAGE CLAMP® termination
- Push-in termination of solid, ferruled, and rigid-stranded conductors
- Test ports both parallel and perpendicular to conductor entry
- Side entry or top entry versions
- Ideal for panel feedthrough applications as operation is parallel to conductor entry





Insert solid or ferruled conductors via push-in termination




Insert fine-stranded conductors and remove all conductors via operating tool



PCB terminal block for panel feedthrough connections

2626 Series				
Pin Spacing	7.5 mm	Conductor Da	ata	
Ratings per	UL 1059	Connection T	echnology	Push-in CAGE CLAMP®
Use Group B	38 A / 600 V	Conductor Ra	ange	20 - 8 AWG
Use Group C	38 A / 600 V	Strip Length		13 - 15 mm
Use Group E	Single pole units with double pinning approved for 38 A / 1000 V	Solder Pin Da	ıta	
Maximum Operating Temp.	115 °C	Solder Pin Le	ngth	4 mm
Flammability Class per UL94	Vo			1.5 x 1 mm
Flammability Class per 0194	VU			2 ^{+0.1} mm
Pole No.	Item No.			
	Side Entry		Top Entry	
1	2626-1101		2626-3101	
2	2626-1102/0020-0000		2626-3102	/0020-0000
3	2626-1103/0020-0000		2626-3103	/0020-0000
4	2626-1104/0020-0000		2626-3104	/0020-0000
5	2626-1105/0020-0000		2626-3105	/0020-0000
6	2626-1106/0020-0000		2626-3106	/0020-0000
7	2626-1107/0020-0000		2626-3107	/0020-0000
8	2626-1108/0020-0000		2626-3108	/0020-0000
9	2626-1109/0020-0000		2626-3109	/0020-0000
10	2626-1110/0020-0000		2626-3110	/0020-0000
11	2626-1111/0020-0000		2626-3111	/0020-0000
12	2626-1112/0020-0000		2626-3112	/0020-0000

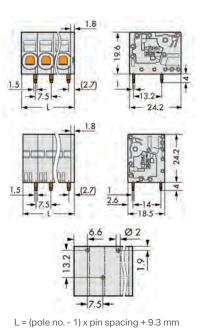

For CAD model and PCB library downloads, go to www.wago.us/2626

2606 SERIES

- PCB terminal block (8 AWG max.) with Push-in CAGE CLAMP® and lever termination
- 100% tool-free intuitive operation
- Push-in termination of solid, ferruled, and rigid-stranded conductors
- Test ports both parallel and perpendicular to conductor entry
- Connection is secured when lever is effortlessly lowered into closed position
- Lever locks into position (open/closed) with an audible click
- Side entry or top entry versions



Insert solid or ferruled conductors via push-in termination




Insert fine-stranded conductors and remove all conductors via lever





PCB terminal block for power supplies, e.g.

2606 Series			
Pin Spacing	7.5 mm	Conductor Data	
Ratings per	UL 1059	Connection Technology	Push-in CAGE CLAMP® with lever
Use Group B	31 A / 600 V	Conductor Range	20 - 8 AWG
Ose Group B	31 A7 600 V	Strip Length	11 - 13 mm
Use Group C	31 A / 600 V	Solder Pin Data	
Maximum Operating Temp.	115 °C	Solder Pin Length	4 mm
Flammability Class per UL94	VO	Solder Pin Dimensions	1.5 x 1.2 mm
Flammability Class per 0194	VO	Drilled Hole Diameter	2 ^{+0.1} mm
Pole No.	Item No.		
	Side Entry	Top Entry	
1	2606-1101	2606-3101	
2	2606-1102/0020-0000	2606-3102	/0020-0000
3	2606-1103/0020-0000	2606-3103	/0020-0000
4	2606-1104/0020-0000	2606-3104	/0020-0000
5	2606-1105/0020-0000	2606-3105	/0020-0000
6	2606-1106/0020-0000	2606-3106	/0020-0000
7	2606-1107/0020-0000	2606-3107	/0020-0000
1			
8	2606-1108/0020-0000	2606-3108	/0020-0000
	2606-1108/0020-0000 2606-1109/0020-0000		/0020-0000 /0020-0000
8		2606-3109	
9	2606-1109/0020-0000	2606-3109 2606-3110	/0020-0000

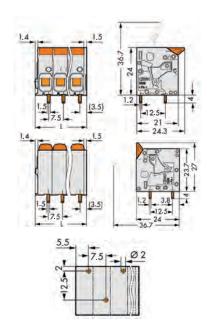

L = (pole no. - 1) x pin spacing + 10.35 mm

For CAD model and PCB library downloads, go to www.wago.us/2606

2636 SERIES

- PCB terminal block (4 AWG max.) with Push-in CAGE CLAMP® termination
- Push-in termination of solid, ferruled, and rigid-stranded conductors
- Test ports both parallel and perpendicular to conductor entry
- Side entry or top entry versions
- Ideal for panel feedthrough applications as operation is parallel to conductor entry





Insert solid or ferruled conductors via push-in termination




Insert fine-stranded conductors and remove all conductors via operating tool



PCB terminal block for panel feedthrough connections

2000 001103					
Pin Spacing	10 mm	10 mm Conductor Data			
Ratings per	UL 1059	Connection T	echnology	Push-in CAGE CLAMP®	
Han Crayer B	66 A / 600 V	Conductor Ra	ange	18 - 4 AWG	
Use Group B	66 A / 600 V	Strip Length		18 - 20 mm	
Use Group C	66 A / 600 V	Solder Pin Data			
Maximum Temperature Rating	120 °C	Solder Pin Length		4 mm	
Flammability Class per UL94	VO	Solder Pin Di	mensions	1 x 1.2 mm	
Fiammability Class per 0194	VU	Drilled Hole Diameter		1.7 ^{+0.1} mm	
Pole No.	Item No.				
	Side Entry		Top Entry		
1	2636-1101		2636-3101		
2	2636-1102/0020-0000		2636-3102/0020-0000		
3	2636-1103/0020-0000		2636-3103/0020-0000		
4	2636-1104/0020-0000		2636-3104/0020-0000		
5	2636-1105/0020-0000		2636-3105/0020-0000		
6	2636-1106/0020-0000		2636-3106/0020-0000		
7	2636-1107/0020-0000		2636-3107/0020-0000		
8	2636-1108/0020-0000		2636-3108/0	020-0000	
9	2636-1109/0020-0000		2636-3109/0	020-0000	
10	2636-1110/0020-0000		2636-3110/0	020-0000	
11	2636-1111/0020-0000		2636-3111/0	020-0000	
12	2636-1112/0020-0000		2636-3112/0	020-0000	

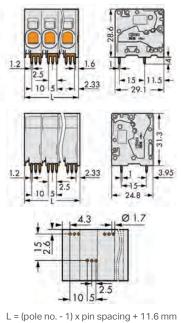

For CAD model and PCB library downloads, go to www.wago.us/2636

2616 SERIES

- PCB terminal block (4 AWG max.) with Push-in CAGE CLAMP® and lever termination
- 100% tool-free intuitive operation
- Push-in termination of solid, ferruled, and rigidstranded conductors
- Test ports both parallel and perpendicular to conductor entry
- Connection is secured when lever is effortlessly lowered into closed position
- Lever locks into position (open/closed) with an audible click
- Side entry or top entry versions





Insert solid or ferruled conductors via push-in termination




Insert fine-stranded conductors and remove all conductors via lever




PCB terminal block for power supplies, e.g.

2616 Series					
Pin Spacing	10 mm	Conductor Dat	ta		
Ratings per	UL 1059	Connection Te	chnology	Push-in CAGE CLAMP® and lever	
Han Crayer B	66 A / 600 V	Conductor Range Strip Length		18 - 4 AWG	
Use Group B	66 A / 600 V			18 - 20 mm	
Use Group C	66 A / 600 V	Solder Pin Data	a		
Double pinning versions rated up	to 72 A - consult factory.	Solder Pin Len	gth	4 mm	
Maximum Operating Temp.	120 °C	Solder Pin Dim	ensions	1.2 x 1.2 mm	
Flammability Class per UL94	V0	Drilled Hole Di	ameter	1.7 ^{+0.1} mm	
Pole No.	Item No.				
	Side Entry		Top Entry		
1	2616-1101		2616-3101		
2	2616-1102/0020-0000		2616-3102/0	020-0000	
3	2616-1103/0020-0000		2616-3103/0020-0000		
4	2616-1104/0020-0000		2616-3104/0020-0000		
5	2616-1105/0020-0000		2616-3105/0020-0000		
6	2616-1106/0020-0000		2616-3106/0020-0000		
7	2616-1107/0020-0000		2616-3107/0	020-0000	
8	2616-1108/0020-0000		2616-3108/0	020-0000	
9	2616-1109/0020-0000		2616-3109/0	020-0000	
10	2616-1110/0020-0000		2616-3110/0	020-0000	
11	2616-1111/0020-0000		2616-3111/0	020-0000	
12	2616-1112/0020-0000		2616-3112/0	000-0020	

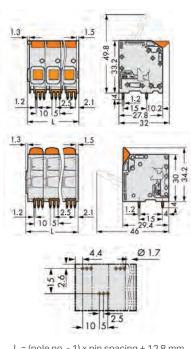

L = (pole no. - 1) x pin spacing + 12.8 mm

For CAD model and PCB library downloads, go to www.wago.us/2616

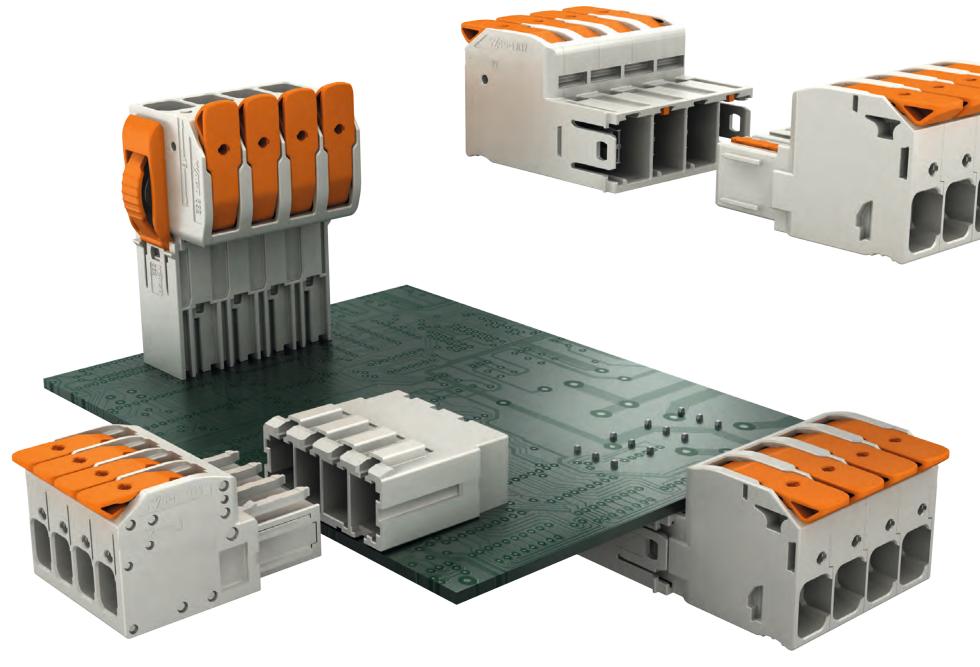

LEVERAGE CONVENIENCE

Pluggable PCB Connectors with Levers – Connect Conductors up to 4 AWG (25 mm²)

For wiring assemblies in the field, highly accessible and simple-to-operate connection points are essential. With the MCS MAXI 6 and MCS MAXI 16, we have leveraged our expertise to offer the world's first pluggable connectors with levers for intuitive, tool-free usage. With this feature, connectors can be easily and quickly wired by hand. Furthermore, simply lowering the lever always ensures a reliable contact.

Both wire-to-wire and wire-to-board versions of pluggable PCB connectors are available and designed for a maximum conductor size of 8 or 4 AWG (10 or 25 mm²). Connection with Push-in CAGE CLAMP® is suitable for

all conductor types and enables solid and fine-stranded conductors with ferrules to be connected by simply pushing them into the unit.

Flexible Coding – Ready to Adapt

The coding of the new MCS MAXI
16 Connectors brings additional
benefits: they are coded internally,
simplifying individual coding
changes – even when the connector
is already installed in the enclosure.
Complicated adjustments to the
enclosure cutout are no longer
required. Another unique feature is
the ability to quickly and easily recode
when plugged in. To keep installation

simple and minimize the number of assemblies, both male headers and female connectors feature the same symmetrically formed coding fingers.

MCS MAXI 6 Connectors are also easy to code. Depending on the version, separate coding pins are available or the coding pins can be broken off directly from the female connector and inserted into the corresponding male header.

100% Safety

As with all MCS products, these new pluggable connectors also provide 100% protection against mismating to ensure maximum safety for field wiring. The integrated protective contact caps within the interface of the MCS MAXI 16 Male Headers and Connectors ensure additional touch-proof safety when unplugged.

Yet another highlight: An optional interlock enables fast, reliable connection while preventing accidental disconnection.

Advantages:

- Easy wiring by hand via lever actuation
- Tool-free, intuitive lever operation
- Product range: 24 ... 4 AW
- Push-in CAGE CLAMP® termination
- Wider conductor range and higher current carrying capacity
- 100% protected against mismatine
- Coding and locking options available

Learn more at:

www.wago.us/powerelectronics

12

MCS MAXI 6: 831 SERIES

Female Connectors with Levers

- Female connectors with levers and Push-in CAGE CLAMP®
- Available with and without locking
- Push-in termination of solid, ferruled, and rigid-stranded conductors
- Test ports both parallel and perpendicular to conductor entry
- Secure connection via simple, effortless lever actuation
- Compatible with existing 831 Series accessories and mates





Lift lever to open spring and insert the conductor.




Close lever to terminate the conductor.



Also available with Push-in CAGE CLAMP® without levers. See item 831-310x.

		Conducto	or Data		
Pin Spacing	7.62 mm	Connecti	on Technology	Push-in CAGE CLAMP® with lever	
Detinus Dev	UL 1059		or Range	20 - 8 AWG	
Ratings Per	OL 1059	Strip Length		11 - 13 mm	
When mated with:	831-12xx Male Connector 831-36xx		Male PCB Header		
Use Group B	35 A / 600 V	35 A / 600 V 35 A / 300			
Use Group C	35 A / 600 V 35 A / 300		V		
Use Group D	- 5 A / 600		V		
Maximum Operating Temp.	115 °C				
Flammability Class per UL94	V0				
Pole No.	Item No.				
	Female connector; light gray with of levers	range		; light gray with orange es and orange levers	
2	831-1102		831-1102/037-000)	
3	831-1103		831-1103/037-000		
4	831-1104		831-1104/037-000		
5	831-1105		831-1105/037-000		
6	831-1106		831-1106/037-000		
7	831-1107		831-1107/037-000)	
8	831-1108		831-1108/037-000)	
9	831-1109		831-1109/037-000)	



For CAD model and PCB library downloads, go to www.wago.us/831


MCS MAXI 6: 831 SERIES

Male Connectors with Levers

- Male connectors with levers and Push-in CAGE CLAMP®
- For wire-to-wire applications
- Push-in termination of solid, ferruled, and rigid-stranded conductors
- Test ports both parallel and perpendicular to conductor entry
- Secure connection via simple, effortless lever actuation
- Compatible with existing 831 Series accessories and mates










Close lever to terminate the conductor.



Also available with Push-in CAGE CLAMP® without levers. See item 831-320x.

831-120x Series					
Pin spacing	7.62 mm	Conductor Data			
Ratings per	UL 1059	Connection Technology	Push-in CAGE CLAMP® with lever		
Use Group B	35 A / 600 V	Conductor Range	20 - 8 AWG		
Use Group C	35 A / 600 V	Strip Length	11 - 13 mm		
Maximum Operating Temp.	115 °C				
Flammability Class per UL94	V0				
Pole No.	Item No.				
	Male connector; light g	ray with orange levers			
2	831-1202				
	831-1203				
3	831-1203				
	831-1203 831-1204				
4					
3 4 5 6	831-1204				
4 5	831-1204 831-1205				
4 5 6	831-1204 831-1205 831-1206				







P = Number of poles T = Pin spacing $L = T \times P + 2.88$

For CAD model and PCB library downloads, go to www.wago.us/831

4

MCS MAXI 6: 831 SERIES


THT Male Headers

- Soldered male headers may be mounted horizontally or vertically via straight or angled solder pins
- Three solder pins per pole provide high electrical and mechanical stability
- 100% protected against mismating
- Coding options available











831-3628

831-3629

Easy coding via coding star


Coding star (Item No. 831-500)

831-36xx Series						
Pin Spacing	7.62 mm	Solder Pin Data				
Ratings Per	UL 1059	Solder Pin Length	4 mm			
Use Group B	35 A / 300 V	Solder Pin Dimensions	1 x 1.2 mm			
Use Group C	35 A / 300 V	Drilled Hole Diameter with Tolerance	1.7 ^{+0.1} mm			
Use Group D	5 A / 600 V					
Maximum Operating Temp.	115 ℃					
Flammability Class per UL 94	V0					
	1997					




831-3609






L = (pole no. - 1) x pin spacing + 10.5 mm


Footprint (top view)





L = (pole no. - 1) x pin spacing + 10.5 mm

Footprint (top view)



MCS MAXI 16: 832 SERIES

Female Connectors with Levers

- Female connectors with levers and Push-in CAGE CLAMP®
- · Available with and without locking
- Push-in termination of solid, ferruled, and rigid-stranded conductors
- Test ports both parallel and perpendicular to conductor entry
- Secure connection via simple, effortless lever actuation





Lift lever to open spring and insert the Close lever to terminate the conductor. conductor.





Side interlocking latches eliminate accidental disconnect.

832-110x Series					
		Cond	uctor Data		
Pin Spacing	10.16 mm	Connection Technology		Push-in CAGE CLAMP® with lever	
Ratings Per	UL 1059		uctor Range	18 - 4 AWG	
Natings i ei	OL 1000	Strip Length		18 - 20 mm	
When mated with:	832-120x Male Connector 8		6xx Male PCB Heade	r	
Use Group B	66 A / 600 V 66 A		' 300 V		
Use Group C	66 A / 600 V	66 A /	300 V		
Use Group D	-	5 A / 6	600 V		
Maximum Operating Temp.	130 °C				
Flammability Class per UL94	VO				
Pole No.	Item No.				
	Female connector; light gray vorange levers	with	th Female connector; light gray with orange interlocking latches and orange levers		
2	832-1102		832-1102/037-000		
3	832-1103		832-1103/037-000		
4	832-1104		832-1104/037-000		
5	832-1105	832-1105/037-000			
6	832-1106	832-1106/037-000			







P = Number of poles T = Pin spacing $L = T \times P + 1.3$

For CAD model and PCB library downloads, go to www.wago.us/832

MCS MAXI 16: 832 SERIES

Male Connectors with Levers

- Male connectors with levers and Push-in CAGE CLAMP®
- For wire-to-wire applications
- Push-in termination of solid, ferruled, and rigid-stranded conductors
- Test ports both parallel and perpendicular to conductor entry
- Secure connection via simple, effortless lever actuation










Lift lever to open spring and insert the conductor.

Close lever to terminate the conductor.

Wire-to-wire connections with coding prevents accidental mis-mating.

832-120x Series			
Pin Spacing	10.16 mm	Conductor Data	
Ratings Per	UL 1059	Connection Technology	Push-in CAGE CLAMP® with lever
Use Group B	66 A / 600 V	Conductor Range	18 - 4 AWG
		Strip Length	18 - 20 mm
Use Group C	66 A / 600 V		
Maximum Operating Temp.	130 ℃		
Flammability Class per UL94	V0		
Pole No.	Item No.		
	Male connector; light gray with orange levers		
2	832-1202		
	832-1203		
3	832-1203		
3 4	832-1203 832-1204		




For CAD model and PCB library downloads, go to www.wago.us/832

MCS MAXI 16: 832 SERIES


THT Male Headers

- Soldered male headers may be mounted horizontally or vertically via straight or angled solder pins
- Three solder pins per pole provide high electrical and mechanical stability
- 100% protected against mismating
- Coding options available

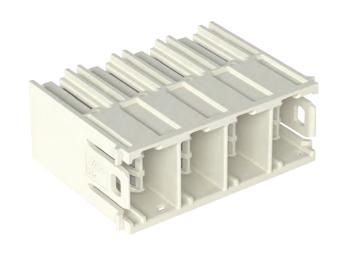



MCS MAXI 16 is ideal for enclosure cutouts



Easy coding thanks to symmetrical coding keys in both male and female connectors



Coding star (Item No. 832-500)











Pole No.	Item No.		
	THT male header; with straight solder pins; light gray	THT male header; with solder pins angled downwards; light gray	THT male header; with solder pins angled upwards; light gray
2	832-3602	832-3622	832-3642
3	832-3603	832-3623	832-3643
4	832-3604	832-3624	832-3644
5	832-3605	832-3625	832-3645
6	832-3606	832-3626	832-3646


For CAD model and PCB library downloads, go to www.wago.us/832

























Footprint (top view)




Cutouts for male headers with solder pins




Footprint (top view)




Cutouts for male headers with solder pins (with inerlocking latches)



Footprint (top view)



Pole No.	х
2	24.1
3	34.2
4	44.4
5	54.6
6	64.7

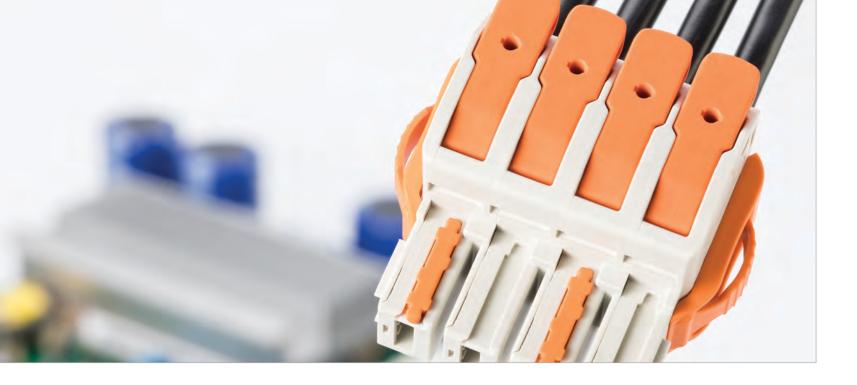

SYSTEM HIGHLIGHTS





Lever Actuation


Easily wired by hand – no tools required






Interlocking Latches

Easy and secure plugging with automatic locking; optional side interlocking latches prevent accidental disconnection.

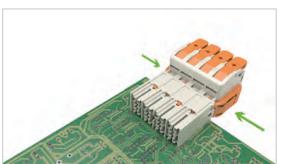

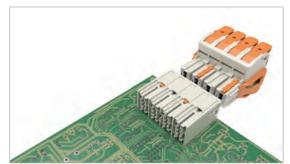

Easy and intuitive disconnection via innovative interlocking latches





Coding

Easy coding thanks to symmetrical coding keys in both male and female connectors










Recoding even when plugged in







WAGO Corporation N120 W19129 Freistadt Road Germantown, Wisconsin 53022 Telephone: 800 / DIN-Rail (346-7245) Fax: 262 / 255-3232 info.us@wago.com www.wago.us

WAGO Canada Inc. 4145 North Service Rd., Unit 224 Burlington, ON L7L 6A3 Telephone: 888 / WAGO 221 (924-6221) info.ca@wago.com www.wago.ca

WAGO SA DE CV Carretera estatal 431 Km. 2+200. Lote 99 6 Parque Industrial Tecnologico Innovacion Queretaro El Marques, Qro. 76246 Lada sin Costo: 01 800 288 WAGO (288-9246) Telefono: 422 / 221-5946 info.mx@wago.com www.wago.mx

WAGO is a registered trademark of WAGO Verwaltungsgesellschaft mbH.

"Copyright – WAGO Kontakttechnik GmbH & Co. KG – all rights reserved. The content and structure of the WAGO Websites, catalogs, videos, and other WAGO media are subject to copyright. The dissemination or changing of the content of these pages and videos is not permitted. Furthermore, the content may neither be copied nor made available to third parties for commercial purposes. Also subject to copyright are the images and videos that were made available to WAGO Kontakttechnik GmbH & Co. KG by third parties."