

K1K005UX

body for changeover switch - 5-pole - 45° - 12 A - for
Ø 22 mm



Main

| | |
|---------------------------------------------|------------------------------------|
| Range of product | Harmony K |
| Product or component type | Cam switch body |
| Component name | K1 |
| [Ith] conventional free air thermal current | 12 A |
| Sub-assembly composition | Contact blocks + fixing plate |
| Cam switch function | Changeover switch |
| Off position | With Off position |
| Poles description | 5P |
| Switching positions | Left: 0° - 315° Right: 0° - 45° |
| Mounting location | Front |
| Fixing mode | Ø 22 mm hole |
| Bezel material | Metal |

Complementary

| | |
|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switching angle | 45 ° |
| [Ui] rated insulation voltage | 690 V degree of pollution 3 conforming to IEC 60947-1 |
| [Ithe] conventional enclosed thermal current | 10 A |
| Rated operational power in W | 600 W AC-3 / 230 V 1 phase conforming to IEC 947-3 1500 W AC-3 / 400 V 1 phase conforming to IEC 947-3 1100 W AC-3 / 230 V 3 phases conforming to IEC 947-3 8300 W AC-21 / 400 V 3 phases conforming to IEC 947-3 1500 W AC-3 / 690 V 3 phases conforming to IEC 947-3 2200 W AC-23A / 400 V 3 phases conforming to IEC 947-3 1500 W AC-3 / 500 V 3 phases conforming to IEC 947-3 2200 W AC-23A / 500 V 3 phases conforming to IEC 947-3 1500 W AC-3 / 400 V 3 phases conforming to IEC 947-3 1500 W AC-23A / 230 V 3 phases conforming to IEC 947-3 2200 W AC-23A / 690 V 3 phases conforming to IEC 947-3 4800 W AC-21 / 230 V 3 phases conforming to IEC 947-3 10500 W AC-21 / 550...600 V 3 phases conforming to IEC 947-3 |
| [Ie] rated operational current AC | 1 A at 500 V AC-15 conforming to IEC 947-5-1 2 A at 400 V AC-15 conforming to IEC 947-5-1 3 A at 230 V AC-15 conforming to IEC 947-5-1 1.8 A at 690 V AC-3 3 phases conforming to IEC 947-3 2.8 A at 500 V AC-3 3 phases conforming to IEC 947-3 2.8 A at 690 V AC-23A 3 phases conforming to IEC 947-3 3.3 A at 400 V AC-3 3 phases conforming to IEC 947-3 3.8 A at 500 V AC-23A 3 phases conforming to IEC 947-3 4.6 A at 230 V AC-3 3 phases conforming to IEC 947-3 4.8 A at 400 V AC-23A 3 phases conforming to IEC 947-3 5.6 A at 230 V AC-23A 3 phases conforming to IEC 947-3 |
| Electrical durability | 1000000 cycles AC-15 1000000 cycles AC-21 500000 cycles AC-23 500000 cycles AC-3 |
| Operating rate | 2.5 cyc/mn AC-21 2.5 cyc/mn AC-23 2.5 cyc/mn AC-3 8.333 cyc/mn AC-15 |
| Short-circuit current | 10000 A |
| Short-circuit protection | 16 A by cartridge fuse, type gG |
| [Uimp] rated impulse withstand voltage | 4 kV in isolating function 6 kV conforming to IEC 947-1 |
| Contact operation | Slow-break |
| Positive opening | With |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Electrical connection | Captive screw clamp terminals flexible, 2 x 1.5 mm ² Captive screw clamp terminals solid, 1 x 2.5 mm ² |
| Mechanical durability | 1000000 cycles |
| Product weight | 0.273 kg |

Environment


| | |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| standards | CENELEC EN 50013 EN/IEC 60947-3 for power circuit EN/IEC 60947-5-1 for control circuit |
| product certifications | CSA 240 V 1 hp 1 phase CSA 240 V 3 hp 3 phases 2 -pole(s) UL 240 V 1 hp 3 phases UL 240 V 0.33 hp 1 phase 2 -pole(s) |
| protective treatment | TC |
| ambient air temperature for operation | -25...55 °C |
| ambient air temperature for storage | -40...70 °C |
| shock resistance | 30 gn conforming to IEC 68-2-27 |
| vibration resistance | 5 gn, 10...150 Hz conforming to IEC 68-2-6 |
| overvoltage category | Class II conforming to IEC 536 Class II conforming to NF C 20-030 |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Body with Metal Base, Secured by Needle Screws

Front Mounting by Ø 22 mm/0.87 in. Hole

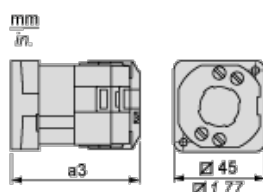


a3 95 mm/3.74 in.


Link Positions (Factory Mounted)

Diagram for 1 to 5-pole Switches

Select the number of poles according to the product characteristics.

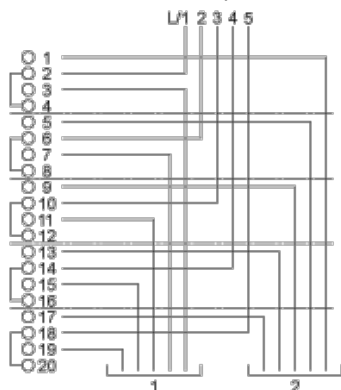


Angular Position of Switch



Switching Program

Diagram for 1 to 5-pole Switches

Select the number of poles according to the product characteristics.

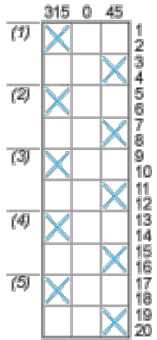

- (1) 1-pole
- (2) 2-pole
- (3) 3-pole
- (4) 4-pole
- (5) 5-pole

Convention Used for Switching Program Representation



Contact closed



Contact closed in 2 positions and maintained between the 2 positions



Sealed assembly for auto-maintain control



Overlapping contacts



Spring return position: for a switching angle of 90°, spring return is over 30° after the last position (for a maximum of 3 simultaneous contacts).

Example:

