

4K 18G HDMI 2.0 4x1 Switcher with ARC

HDS41-18G





HDS41A-18G

The SY-HDS41A-18G is a four-input, single-output HDMI 2.0 video switcher with both manual and auto selection modes. With de-embedded audio and ARC facility (input 4), this switcher is useful for switching up to four HDMI sources to a single display device. The switcher can be controlled manually from the front panel, via the RS232 interface, or the included IR remote controller.

FEATURES

- Supports all HDMI resolutions up to 4K@60 4:4:4 HDR
- 18G high bandwidth
- 4x HDMI video inputs, 1x HDMI output
- HDMI Input 4 supports ARC
- Video switching from Front Panel, RS232 control, or IR
- Auto input selection
- HDMI 2.0 compatible
- Supports 4K@60, full 3D, HDCP1.4/2.2 and CEC

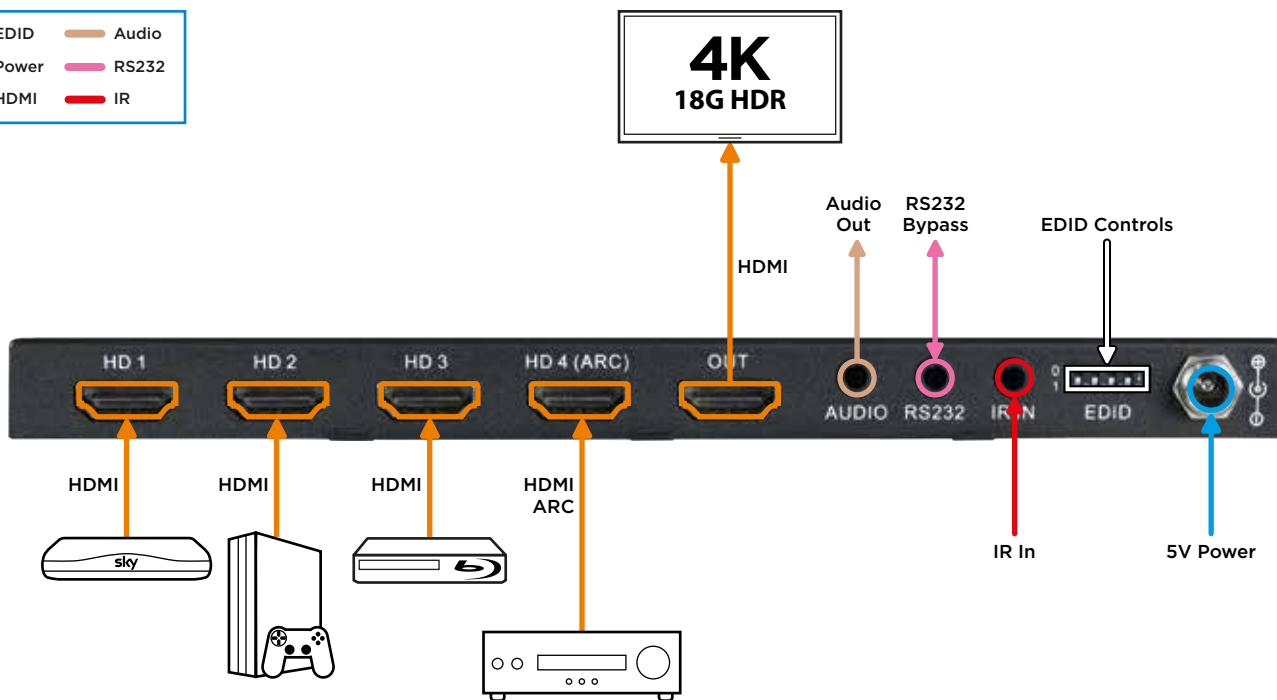

SPECIFICATIONS

PART NUMBER	SY-HDS41A-18G	
VIDEO RESOLUTIONS/FORMATS	480i, 480p, 720i, 720p, 1080i, 1080p, 1920 x 1200, 4Kx2K@60Hz 4:4:4	
INPUTS	Video 4x HDMI type A	
OUTPUTS	Video 1x HDMI type A	Audio 1x 3.5mm L+R
CONTROL	RS232 9600 baud, 8 bits, no parity, 1 stop bit.	IR Bypass for controlling remote devices
POWER	5V DC	
POWER CONSUMPTION	5W Max	
WEIGHT AND DIMENSIONS	Weight (net) 0.324kg	Size (WHD) 194 x 15 x 81mm
CERTIFICATES	CE, RoHS, FCC	
WHAT'S IN THE BOX	1x HDS41A-18G Wall power supply with UK and EU plug adaptors IR hand set 1xIR receiver User's Manual	

Developer member HDBaseT alliance. "HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of the HDMI Licensing LLC in the United States and other countries" Details subject to change with no prior notice.