S3 Series S Size Form C (Changeover) Reed Relay



The S3 series is a compact reed relay with changeover contacts which are often used for safety critical applications.

Low contact resistance, through the use of Rhodium contact reed switches, makes the S series suitable for many high voltage applications at DC and low frequency, where performance and reliability are paramount.

These are PCB mount relays, though custom options may be available on request.


32.50 max

- Compact footprint
- **Changeover contacts**
- PCB Mount
- Available with or without magnetic screen

Contact Specification		Unit		Condit	ion	
Switch Action			SPCO			
Contact Material			Rhodium			
Isolation across contacts kV DC or AC peak			0.20			
Isolation contact to coil	contact to coil kV Dc or		2			
Switching Power Max.	VA	resistive	3			
Switching Voltage Max.	٧	DC 120			20	
Switching Current Max.	А	DC 0.25			.25	
Carry Current Max	А	DC 1.2			.2	
Capacitance across	pF	coil to screen 1.4			.4	
contacts		grounded				
Contact Resistance	m Ω max (typical)		150		50	
Insulation Resistance	Ω n	nin (typical)	(10 ⁸)		0 ⁸)	
Coil Specification			5V	12V	24V	
Must Operate Voltage	V	DC	3.75	9	18	
Must Release Voltage	٧	DC	0.5	1.2	2.4	
Resistance	Ω (± 10%)		30	180	1000	
Note. The operate / release volta	ige and	d coil resistance will cha	nge at a ra	te of 0.4%	5 per degree	C. Values are stated at room temperature (20 degrees C)
Environmental Conditio	ne					

Elivir ullillelital cultuitions		
Operating Temperature Range °C	-40 to +85	
Storage Temperature Range °C	-40 to +100	
Standard Parts	Coil Voltage Vdc	Magnetic Screen
S3-05-C	5	No
S3-05-CM	5	Yes
S3-12-C	12	No
S3-12-CM	12	Yes
S3-24-C	24	No
S3-24-CM	24	Yes
Discourse of the state of the state of the state of the	and an analysis while the second second by	le standing the standard select of

Please refer to this document for circuit design notes:- http://www.cynergy3.com/blog/application-notes-reed-relays-0

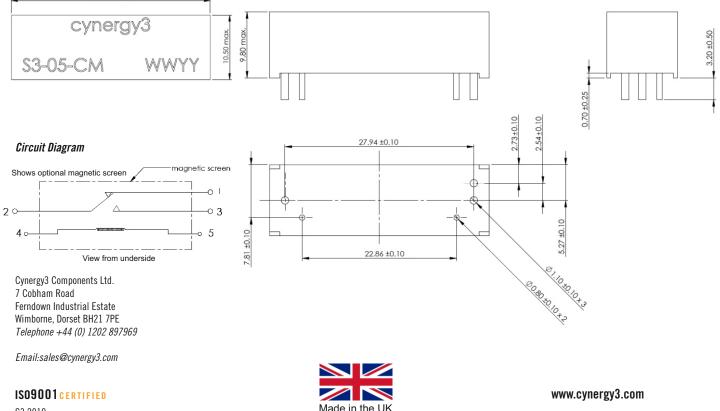

S3 2019

© 2019 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.

