
Surface Mount Fast Switching Diode

multicomp PRO



Features:

- Fast Switching Speed
- For General Purpose Switching Application
- Ultra-Small Surface Mount Package



Applications:

For general purpose switching application

SOT-363

Max. Rating @ T_A = 25°C unless otherwise specified


Parameter	Symbol	Limits	Unit
DC reverse voltage	VR	85	V
Forward continuous current	lfм	200	mA
Average rectified output current	lo	150	mA
Power dissipation	Po	200	mW
Thermal resistance, junction to ambient	Reja	625	°C/W
Operating and storage temperature range	Т _{ј,} Тѕтс	-65 to +150	С°


Electrical Characteristics @ T_A = 25°C unless otherwise specified

Parameter	Symbol	Conditions	Min.	Max.	Unit
Reverse breakdown voltage	V(br)r	Ir = 100µA	85	-	V
Forward voltage	VF	IF = 1mA IF = 10mA IF = 50mA IF = 150mA	-	0.9 1.0 1.1 1.25	V
Junction capacitance	СJ	VR = 0V, f = 1MHz	-	2	pF
Reverse recovery time	trr	$I_{F} = I_{R} = 10 \text{mA},$ Irr = 0.1 × I_{R}, R_{L} = 100 \Omega	-	3	ns

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro






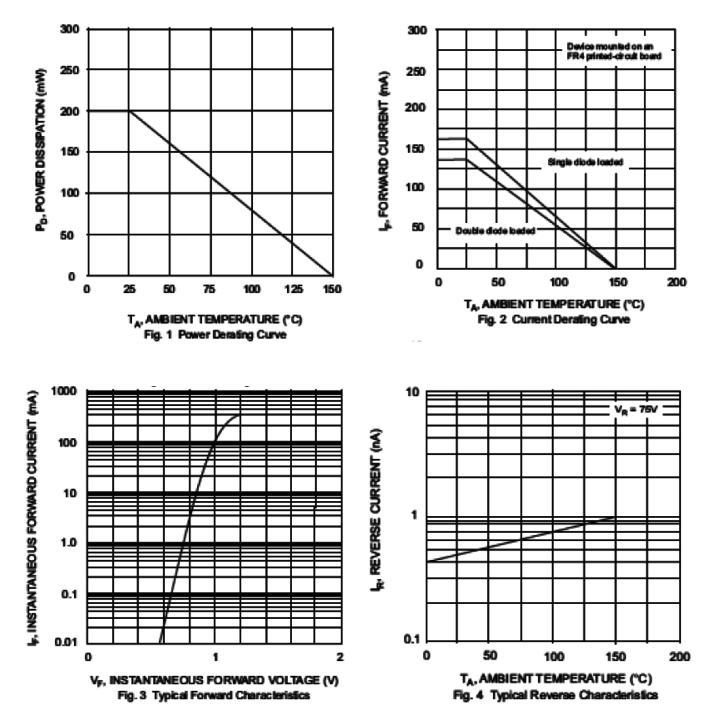

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro


multicomp PRO

Plastic surface mounted package



SOT-363			
Dim	Min	Max	
A	1.8	2.2	
В	1.15	1.35	
С	1 Typical		
D	0.1	0.3	
E	0.25	0.4	
G	0.65 Typical		
Н	0.02	0.1	
J	0.1Typical		
К	2.1	2.3	
All Dimensions in mm			

Soldering Footprint



Package Information

Device	Package	Shipping
BAV199DW-7-F	SOT-363	3,000 / Tape & Reel

Unit : mm

Part Number Table

Description	Part Number	
Surface Mount Fast Switching Diode	BAV199DW-7-F	

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

