



# 2601B-PULSE System SourceMeter® 10 $\mu$ sec Pulser/SMU Instrument

PRODUCT FACTSHEET

# 2601B-PULSE System SourceMeter® 10µsec Pulser/SMU Instrument




## Features

- Industry leading Source Measure Unit with PulseMeter™ technology for 10 A @ 10 V, 10 microsecond pulse output
- No tuning required for inductive loads up to 3 µH
- Dual 1 Megasample/sec digitizers for high speed I/V pulse measurements (Pulser function only)
- DC capability up to ±40 V @ ±1.0 A, 40 Watt
- TSP (Test Script Processing) technology embeds complete test programs inside the instrument for best-in-class system-level throughput


## Benefits

- Make DC/Pulse voltage and current measurements with a single instrument
- Minimize device self-heating; minimize burned probe tips
- No tuning of pulse output to ensure pulse fidelity
- Remote test head is not required enabling greater space savings

## Superior Current Pulse Output Performance at 10A @ 10V at 10µsec

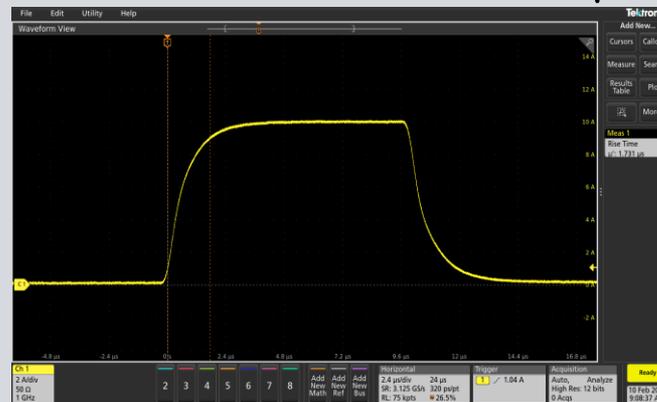


Typical Pulse output with overshoot and 6.47 µsec rise time from a competitive SMU

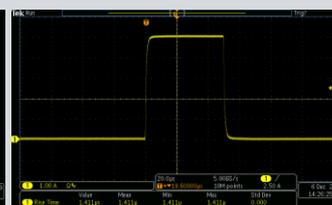


2601B-PULSE output without overshoot and 1.4 µsec rise time using PulseMeter® technology.

## Typical Applications

Ideal for current/voltage ((I/V) characterization and functional test of a wide range of today's modern electronics and devices, such as applications like:



VCSELs for LIDAR



VCSELs for Facial Recognition



Circuit Protection Device Testing



SSD Power Management Fault Detection



Wafer Level Reliability Test

# 2601B-PULSE System SourceMeter® 10µsec Pulser/SMU Instrument

## Pulser Condensed Specifications

### Current Specifications

| Source |                        |   |
|--------|------------------------|---|
| Range  | Programming Resolution | Accuracy (23°C ±5°C)<br>1 Year<br>+/- (% setting + volts) |
| 1A     | 100 µA                 | 0.17 % + 1 mA   |
| 5A     | 100 µA                 | 0.17 % + 1 mA   |
| 10A    | 100 µA                 | 0.22 % + 1 mA   |

| Measure |                    |   |
|---------|--------------------|---|
| Range   | Display Resolution | Accuracy (23°C ±5°C)<br>1 Year<br>+/- (% setting + volts) |
| 1A      | 10 µA              | 0.12 % + 0.3 mA   |
| 5A      | 10 µA              | 0.12 % + 1 mA   |
| 10A     | 100 µA             | 0.12 % + 1 mA   |

### Voltage Specifications

| Measure |                    |   |
|---------|--------------------|---|
| Range   | Display Resolution | Accuracy (23°C ±5°C)<br>1 Year<br>+/- (% setting + volts) |
| 5A      | 10 µV              | 0.05 % + 1 mV   |
| 10A     | 100 µV             | 0.05 % + 4 mV   |

### Pulse Limits

|   |
|---|
| +/- 10 A @ +/- 10V pulse (3% duty cycle)    |
| +/- 3 A @ +/- 10V pulse (10% duty cycle)    |
| +/- 1 A @ +/- 10V pulse (30% duty cycle)    |
| +/- 500 mA @ +/- 10V pulse (60% duty cycle) |
| +/- 250 mA @ +/- 10V continuous             |



Refer to [www.tektronix.com](http://www.tektronix.com) for additional product details, complete specifications, application notes, software, videos, product tours.



# 2601B-PULSE System SourceMeter® 10µsec Pulser/SMU Instrument

## SMU DC Condensed Specifications

### DC Voltage Specifications

| Source |                 |                        |   | Measure                    |                  |   |
|--------|-----------------|------------------------|---|----------------------------|------------------|---|
| Range  | Max. DC Current | Programming Resolution | Accuracy (23°C ±5°C)<br>1 Year<br>+/- (% setting + volts) | Default Display Resolution | Input Resistance | Accuracy (23°C ±5°C)<br>1 Year<br>+/- (% reading + volts) |
| 100mV  | 3A              | 5 µV                   | 0.02 % + 250 µV   | 100 nV                     | > 10 GΩ          | 0.015 % + 150 µV  |
| 1 V    | 3A              | 50 µV                  | 0.02 % + 400 µV   | 1 µV                       | > 10 GΩ          | 0.015 % + 200 µV  |
| 6 V    | 3A              | 50 µV                  | 0.02 % + 1.8 mV   | 10 µV                      | > 10 GΩ          | 0.015 % + 1 mV  |
| 40 V   | 1A              | 500 µV                 | 0.02 % + 12 mV  | 10 µV                      | > 10 GΩ          | 0.015 % + 8 mV  |

### DC Current Specifications

| Source |              |                        |  | Measure                    |                |  |
|--------|--------------|------------------------|--|----------------------------|----------------|--|
| Range  | Max. Voltage | Programming Resolution | Accuracy (23°C ±5°C)<br>1 Year<br>+/- (% setting + amps) | Default Display Resolution | Voltage Burden | Accuracy (23°C ±5°C)<br>1 Year<br>+/- (% reading + amps) |
| 100 nA | 40V          | 2 pA                   | 0.1 % + 100 pA   | 100 fA                     | < 1 mV         | 0.050 % + 100 pA   |
| 1 µA   | 40V          | 20 pA                  | 0.03 % + 800 pA  | 1 pA                       | < 1 mV         | 0.025 % + 500 pA   |
| 10 µA  | 40V          | 200 pA                 | 0.03 % + 5 nA  | 10 pA                      | < 1 mV         | 0.025 % + 1.5 nA   |
| 100 µA | 40V          | 2 nA                   | 0.03 % + 60 nA   | 100 pA                     | < 1 mV         | 0.020 % + 25 nA  |
| 1 mA   | 40V          | 20 nA                  | 0.03 % + 300 nA  | 1 nA                       | < 1 mV         | 0.020 % + 200 nA   |
| 10 mA  | 40V          | 200 nA                 | 0.03 % + 6 µA  | 10 nA                      | < 1 mV         | 0.020 % + 2.5 µA   |
| 100 mA | 40V          | 2 µA                   | 0.03 % + 30 µA   | 100 nA                     | < 1 mV         | 0.020 % + 20 µA  |
| 1 A    | 40V          | 20 µA                  | 0.05 % + 1.8 mA  | 1 µA                       | < 1 mV         | 0.030 % + 1.5 mA   |
| 3 A    | 6V           | 20 µA                  | 0.06 % + 4 mA  | 1 µA                       | < 1 mV         | 0.050 % + 3.5 mA   |
| 10 A   | 20V          | 200 µA                 | 0.5 % + 40 mA  | 10 µA                      | < 1 mV         | 0.400 % + 25 mA<br>(typ.)                                |

- 10A range accessible only in SMU DC Pulse mode
- LXI, USB2.0, GPIB, LAN, TSP-Link® and digital I/O Interfaces are supported.
- USB 2.0 port (memory I/O) on front panel for data import/export and system upgrades

Refer to [www.tektronix.com](http://www.tektronix.com) for additional product details, complete specifications, application notes, software, videos, product tours.

### Ordering Information

2601B-PULSE System SourceMeter®  
10 µsec Pulser / SMU  
Instrument

### Accessories Supplied

2601B-P-INT Interlock/Connector Board  
7709-308A Digital I/O Connector  
17469460X TSP-Link/Ethernet Cable  
2601B-PULSE QuickStart Guide  
Test Script Builder Software ([www.tektronix.com](http://www.tektronix.com))  
KickStart Startup Software ([www.tektronix.com](http://www.tektronix.com))  
LabVIEW and IVI Drivers ([www.tektronix.com](http://www.tektronix.com))  
Manual Documentation ([www.tektronix.com](http://www.tektronix.com))

### Recommended Accessories

2601B-PULSE-CA1 1.2 meter BNC to BNC 50 Ohm Cables set  
2601B-PULSE-CA2 2 independent 3.0 meter 50 ohm BNC to BNC coax cables used for SHI and SLO. Required accessory for the 2601B-PULSE-CA3 cable set.  
2601B-PULSE-CA3 3.0 meter 15 Ohm BNC to BNC cable kit. The 2601B-PULSE-CA2 option is required with this accessory.

### Recommended Services

2601B-PULSE-3Y-EW 1-year factory warranty extended to 3 years from date of shipment  
2601B-PULSE-5Y-EW 1-year factory warranty extended to 5 years from date of shipment



**Tektronix<sup>®</sup>**

The background is a dark blue gradient with several diagonal lines in lighter shades of blue. One prominent line is a solid light blue, while others are semi-transparent or feature a halftone dot pattern. The overall aesthetic is modern and technical.

Find more valuable resources at [TEK.COM](https://www.tek.com)

Copyright © Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.  
021820 1KW-61658-0

---

