
# SQJ500AEP



Vishay Siliconix

# Automotive N- and P-Channel 40 V (D-S) 175 °C MOSFET

PRODUCT SUMMARY	1	
	N-CHANNEL	P-CHANNEL
V <sub>DS</sub> (V)	40	-40
$R_{DS(on)} (\Omega)$ at $V_{GS} = \pm 10 \text{ V}$	0.0092	0.0270
$R_{DS(on)} (\Omega)$ at $V_{GS} = \pm 4.5 \text{ V}$	0.0112	0.0435
I <sub>D</sub> (A)	30	-30
Configuration	N- and	P-Pair




### **FEATURES**

- TrenchFET<sup>®</sup> Power MOSFET
- AEC-Q101 Qualified<sup>d</sup>
- 100 % R<sub>a</sub> and UIS Tested
- Material categorization: For definitions of compliance please see <u>www.vishay.com/doc?99912</u>



RoHS COMPLIANT HALOGEN FREE



N-Channel MOSFET P-Channel MOSFET

ORDERING INFORMATION	
Package	PowerPAK SO-8L
Lead (Pb)-free and Halogen-free	SQJ500AEP-T1-GE3

ABSOLUTE MAXIMUM RATINGS (T	<sub>C</sub> = 25 °C, unless	otherwise n	oted)			
PARAMETER	SYMBOL	N-CHANNEL	P-CHANNEL	UNIT		
Drain-Source Voltage		V <sub>DS</sub>	40	-40	v	
Gate-Source Voltage		V <sub>GS</sub>	±	20	v	
Continuous Drain Current <sup>a</sup>	T <sub>C</sub> = 25 °C	I.,	30	-30		
Continuous Drain Current.	T <sub>C</sub> = 125 °C	ID	30	-18		
Continuous Source Current (Diode Conduction) <sup>a</sup>		I <sub>S</sub>	30	-30	А	
Pulsed Drain Current <sup>b</sup>		I <sub>DM</sub>	120	-120		
Single Pulse Avalanche Current	L _ 0.1 mH	I <sub>AS</sub>	26.5	-25		
Single Pulse Avalanche Energy L = 0.1 mH		E <sub>AS</sub>	35	31	mJ	
Maximum Dawar Disaination <sup>b</sup>	T <sub>C</sub> = 25 °C	Р	48	48	14/	
Maximum Power Dissipation <sup>b</sup>	T <sub>C</sub> = 125 °C	PD	16 16		W	
Operating Junction and Storage Temperature Range		T <sub>J</sub> , T <sub>stg</sub>	-55 to +175		℃	
Soldering Recommendations (Peak Temperature)	e, f		2	60		

## THERMAL RESISTANCE RATINGS

PARAMETER		SYMBOL	N-CHANNEL	P-CHANNEL	UNIT
Junction-to-Ambient	PCB Mount <sup>c</sup>	R <sub>thJA</sub>	85	85	°C/W
Junction-to-Case (Drain)		R <sub>thJC</sub>	3.1	3.1	0/10

Notes

a. Package limited.

b. Pulse test; pulse width  $\leq 300~\mu s,~duty~cycle \leq 2~\%.$ 

c. When mounted on 1" square PCB (FR4 material).

d. Parametric verification ongoing.

f. Rework conditions: manual soldering with a soldering iron is not recommended for leadless components.

S13-2581-Rev. A, 23-Dec-13

1

Document Number: 62878

For technical questions, contact: <a href="mailto:automostechsupport@vishay.com">automostechsupport@vishay.com</a>

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishav.com/doc?91000

e. See solder profile (<u>www.vishay.com/doc?73257</u>). The PowerPAK SO-8L is a leadless package. The end of the lead terminal is exposed copper (not plated) as a result of the singulation process in manufacturing. A solder fillet at the exposed copper tip cannot be guaranteed and is not required to ensure adequate bottom side solder interconnection.

www.vishay.com

SHAY

SQJ500AEP	

Vishay Siliconix

PARAMETER	SYMBOL	TEST CONDITIONS			MIN.	TYP.	MAX.	UNIT	
Static					1	•	1		
	Ň	V <sub>GS</sub> =	N-Ch	40	-	-			
Drain-Source Breakdown Voltage	V <sub>DS</sub>			P-Ch	-40	-	-		
	M	V <sub>DS</sub> =	: V <sub>GS</sub> , I <sub>D</sub> = 250 μΑ	N-Ch	1.3	1.8	2.3	V	
Gate-Source Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> =	V <sub>GS</sub> , I <sub>D</sub> = - 250 μΑ	P-Ch	-1.5	-2	-2.5		
Onto Dourse Looke as			0.1/. 1/. 00.1/	N-Ch	-	-	± 100	-	
Gate-Source Leakage	I <sub>GSS</sub>	v <sub>DS</sub> =	$V_{DS} = 0 V, V_{GS} = \pm 20 V$			-	± 100	nA	
		$V_{GS} = 0 V$	V <sub>DS</sub> = 40 V	N-Ch	-	-	1		
		$V_{GS} = 0 V$	V <sub>DS</sub> = -40 V	P-Ch	-	-	-1		
Zaus Osta Valtana Dusia Ouwant		$V_{GS} = 0 V$	V <sub>DS</sub> = 40 V, T <sub>J</sub> = 125 °C	N-Ch	-	-	50		
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	$V_{GS} = 0 V$	V <sub>DS</sub> = -40 V, T <sub>J</sub> = 125 °C	P-Ch	-	-	-50	μA	
		$V_{GS} = 0 V$	V <sub>DS</sub> = 40 V, T <sub>J</sub> = 175 °C	N-Ch	-	-	150		
		$V_{GS} = 0 V$	V <sub>DS</sub> = -40 V, T <sub>J</sub> = 175 °C	P-Ch	-	-	-150		
		V <sub>GS</sub> = 10 V	$V_{DS} \ge 5 V$	N-Ch	25	-	-	•	
On-State Drain Current <sup>a</sup>	I <sub>D(on)</sub>	V <sub>GS</sub> = -10 V	$V_{DS} \le 5 V$	P-Ch	-25	-	-	A	
		V <sub>GS</sub> = 10 V	I <sub>D</sub> = 9.8 A	N-Ch	-	0.0077	0.0092	Ω	
	R <sub>DS(on)</sub>	V <sub>GS</sub> = -10 V	I <sub>D</sub> = -6 A	P-Ch	-	0.0220	0.0270		
		V <sub>GS</sub> = 10 V	I <sub>D</sub> = 9.8 A, T <sub>J</sub> = 125 °C	N-Ch	-	-	0.0138		
		V <sub>GS</sub> = -10 V	I <sub>D</sub> = -6 A, T <sub>J</sub> = 125 °C	P-Ch	-	-	0.0380		
Drain-Source On-State Resistance <sup>a</sup>		V <sub>GS</sub> = 10 V	I <sub>D</sub> = 9.8 A, T <sub>J</sub> = 175 °C	N-Ch	-	-	0.0170		
		V <sub>GS</sub> = -10 V	I <sub>D</sub> = -6 A, T <sub>J</sub> = 175 °C	P-Ch	-	-	0.0460		
		V <sub>GS</sub> = 4.5 V	I <sub>D</sub> = 8.9 A	N-Ch	-	0.0094	0.0112		
		V <sub>GS</sub> = -4.5 V	I <sub>D</sub> = -4.7 A	P-Ch	-	0.0360	0.0435		
			= 15 V, I <sub>D</sub> = 9.8 A	N-Ch	-	65	-	_	
Forward Transconductance <sup>b</sup>	9 <sub>fs</sub>	V <sub>DS</sub> :	= -15 V, I <sub>D</sub> = -6 A	P-Ch	-	16	-	S	
Dynamic <sup>b</sup>		•				•			
	_	$V_{GS} = 0 V$	V <sub>DS</sub> = 20 V, f = 1 MHz	N-Ch	-	1474	1843		
Input Capacitance	C <sub>iss</sub>	$V_{GS} = 0 V$	V <sub>DS</sub> = -20 V, f = 1 MHz	P-Ch	-	1302	1628		
	<u> </u>	$V_{GS} = 0 V$	V <sub>DS</sub> = 20 V, f = 1 MHz	N-Ch	-	218	273	_	
Output Capacitance	Coss	$V_{GS} = 0 V$	V <sub>DS</sub> = -20 V, f = 1 MHz	P-Ch	-	222	278	pF	
	0	$V_{GS} = 0 V$	V <sub>DS</sub> = 20 V, f = 1 MHz	N-Ch	-	89	111		
Reverse Transfer Capacitance	C <sub>rss</sub>	$V_{GS} = 0 V$	V <sub>DS</sub> = -20 V, f = 1 MHz	P-Ch	-	154	193		
<b>T</b> + 1 <b>O</b> + <b>O</b> + <b>O</b>	_	V <sub>GS</sub> = 10 V	V <sub>DS</sub> = 20 V, I <sub>D</sub> = 10 A	N-Ch	-	25.5	38.3		
Total Gate Charge <sup>c</sup>	Qg	V <sub>GS</sub> = -10 V	V <sub>DS</sub> = -20 V, I <sub>D</sub> = -10 A	P-Ch	-	30.2	45	1	
	Q <sub>gs</sub>	V <sub>GS</sub> = 10 V	V <sub>DS</sub> = 20 V, I <sub>D</sub> = 10 A	N-Ch	-	4.4	-	nC	
Gate-Source Charge <sup>c</sup>		V <sub>GS</sub> = -10 V	V <sub>DS</sub> = -20 V, I <sub>D</sub> = -10 A	P-Ch	-	4.1	-	1	
		V <sub>GS</sub> = 10 V	$V_{DS} = 20 \text{ V}, \text{ I}_{D} = 10 \text{ A}$	N-Ch	-	4.3	-	1	
Gate-Drain Charge <sup>c</sup>	Q <sub>gd</sub>	V <sub>GS</sub> = -10 V	V <sub>DS</sub> = -20 V, I <sub>D</sub> = -10 A	P-Ch	-	7.4	-	1	
			N-Ch		1.37	2.1	_		
Gate Resistance	R <sub>g</sub>		f = 1 MHz	P-Ch	3.1	6.15	9.5	Ω	



www.vishay.com

# SQJ500AEP

Vishay Siliconix

<b>SPECIFICATIONS</b> (T <sub>C</sub> = 25	°C, unless o	otherwise noted)					
PARAMETER	SYMBOL	IBOL TEST CONDITIONS				MAX.	UNIT
Turn-On Delay Time <sup>c</sup>	+	$\label{eq:VDD} \begin{array}{l} V_{DD} = 20 \; V, \; R_{L} = 2 \; \Omega \\ I_{D} \cong 10 \; A, \; V_{GEN} = 10 \; V, \; R_{g} = 1 \; \Omega \end{array}$	N-Ch	-	8	12	
	t <sub>d(on)</sub>	$V_{\text{DD}} = -20 \text{ V}, \text{ R}_{\text{L}} = 2 \Omega$ $\text{I}_{\text{D}} \cong -10 \text{ A}, \text{ V}_{\text{GEN}} = -10 \text{ V}, \text{ R}_{\text{g}} = 1 \Omega$	P-Ch	-	7	11	
Rise Time <sup>c</sup>	+	$\label{eq:VDD} \begin{array}{l} V_{DD} = 20 \; V, \; R_L = 2 \; \Omega \\ I_D \cong 10 \; A, \; V_{GEN} = 10 \; V, \; R_g = 1 \; \Omega \end{array}$	N-Ch	-	12	18	
	tr	$\label{eq:VDD} \begin{array}{l} V_{DD} = \text{-20 V, } R_L = 2 \ \Omega \\ I_D \cong \text{-10 A, } V_GEN = \text{-10 V, } R_g = 1 \ \Omega \end{array}$	P-Ch	-	9	13	
	+	$\label{eq:VDD} \begin{array}{l} V_{\text{DD}} = \text{20 V}, \ R_{\text{L}} = \text{2} \ \Omega \\ I_{\text{D}} \cong \text{10 A}, \ V_{\text{GEN}} = \text{10 V}, \ R_{\text{g}} = \text{1} \ \Omega \end{array}$	N-Ch	-	22	33	NIT ns A V
Turn-Off Delay Time <sup>c</sup>	t <sub>d(off)</sub>	$V_{\text{DD}} = -20 \text{ V}, \text{ R}_{\text{L}} = 2 \Omega$ $\text{I}_{\text{D}} \cong -10 \text{ A}, \text{ V}_{\text{GEN}} = -10 \text{ V}, \text{ R}_{\text{g}} = 1 \Omega$	P-Ch	-	43	64	
Fall Time <sup>c</sup>		$\label{eq:VDD} \begin{array}{l} V_{DD} = 20 \; V, \; R_{L} = 2 \; \Omega \\ I_{D} \cong 10 \; A, \; V_{GEN} = 10 \; V, \; R_{g} = 1 \; \Omega \end{array}$	N-Ch	-	10	16	
	t <sub>f</sub>	$V_{\text{DD}} = -20 \text{ V}, \text{ R}_{\text{L}} = 2 \Omega$ $\text{I}_{\text{D}} \cong -10 \text{ A}, \text{ V}_{\text{GEN}} = -10 \text{ V}, \text{ R}_{\text{g}} = 1 \Omega$	P-Ch	-	19	28	
Source-Drain Diode Ratings and C	haracteristics	5 <sup>b</sup>					
Pulsed Current <sup>a</sup>	1		N-Ch	-	-	120	^
	I <sub>SM</sub>		P-Ch	-	-	-120	A
Forward Voltage	Var	I <sub>S</sub> = 6.5 A	N-Ch	-	0.79	1.2	V
Forward Voltage	V <sub>SD</sub>	I <sub>S</sub> = -3.4 A	P-Ch	-	-0.78	-1.2	V

Notes

a. Pulse test; pulse width  $\leq$  300 µs, duty cycle  $\leq$  2 %.

b. Guaranteed by design, not subject to production testing.


c. Independent of operating temperature.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

3



# **N-CHANNEL TYPICAL CHARACTERISTICS** ( $T_A = 25$ °C, unless otherwise noted)

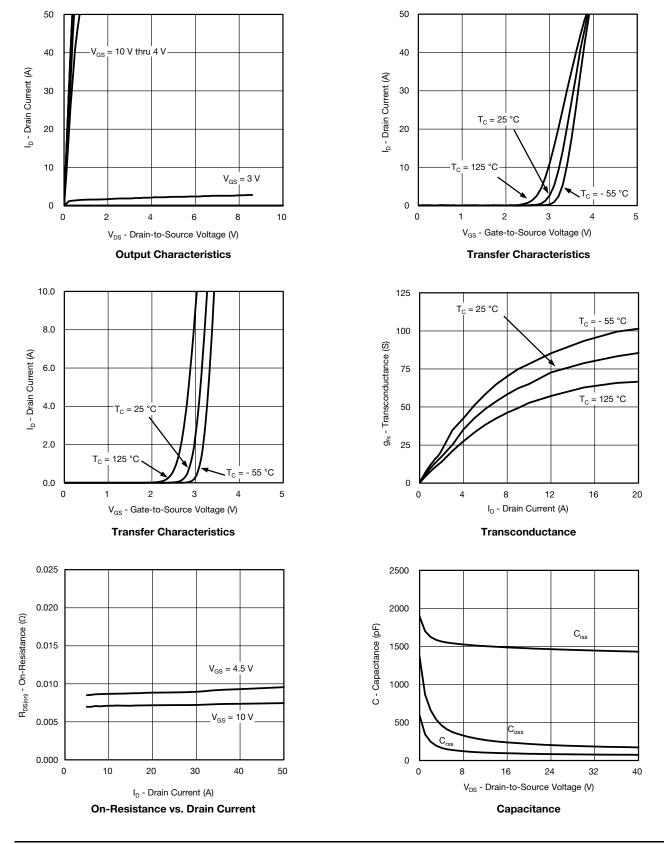


S13-2581-Rev. A, 23-Dec-13

4


Document Number: 62878




# **N-CHANNEL TYPICAL CHARACTERISTICS** ( $T_A = 25$ °C, unless otherwise noted)









Source Drain Diode Forward Voltage






**On-Resistance vs. Junction Temperature** 



**On-Resistance vs. Gate-to-Source Voltage** 



Drain Source Breakdown vs. Junction Temperature

S13-2581-Rev. A, 23-Dec-13

5


Document Number: 62878




SQJ500AEP

**Vishay Siliconix** 

## **N-CHANNEL TYPICAL CHARACTERISTICS** (T<sub>A</sub> = 25 °C, unless otherwise noted)

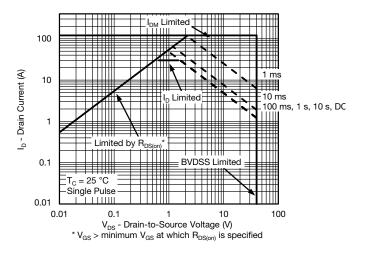


Safe Operating Area

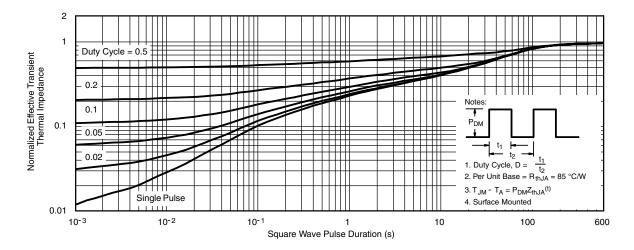

Normalized Thermal Transient Impedance, Junction-to-Ambient



# **N-CHANNEL TYPICAL CHARACTERISTICS** ( $T_A = 25$ °C, unless otherwise noted)

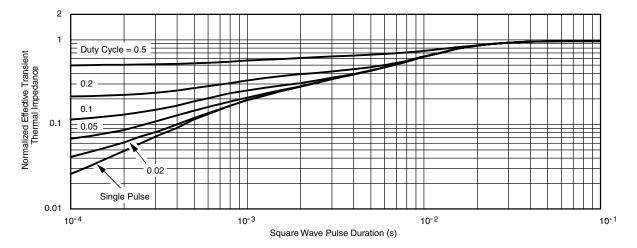

#### Normalized Thermal Transient Impedance, Junction-to-Case


#### Note

- The characteristics shown in the two graphs
- Normalized Transient Thermal Impedance Junction-to-Ambient (25 °C)
- Normalized Transient Thermal Impedance Junction-to-Case (25 °C)

are given for general guidelines only to enable the user to get a "ball park" indication of part capabilities. The data are extracted from single pulse transient thermal impedance characteristics which are developed from empirical measurements. The latter is valid for the part mounted on printed circuit board - FR4, size 1" x 1" x 0.062", double sided with 2 oz. copper, 100 % on both sides. The part capabilities can widely vary depending on actual application parameters and operating conditions.



# **P-CHANNEL TYPICAL CHARACTERISTICS** ( $T_A = 25$ °C, unless otherwise noted)

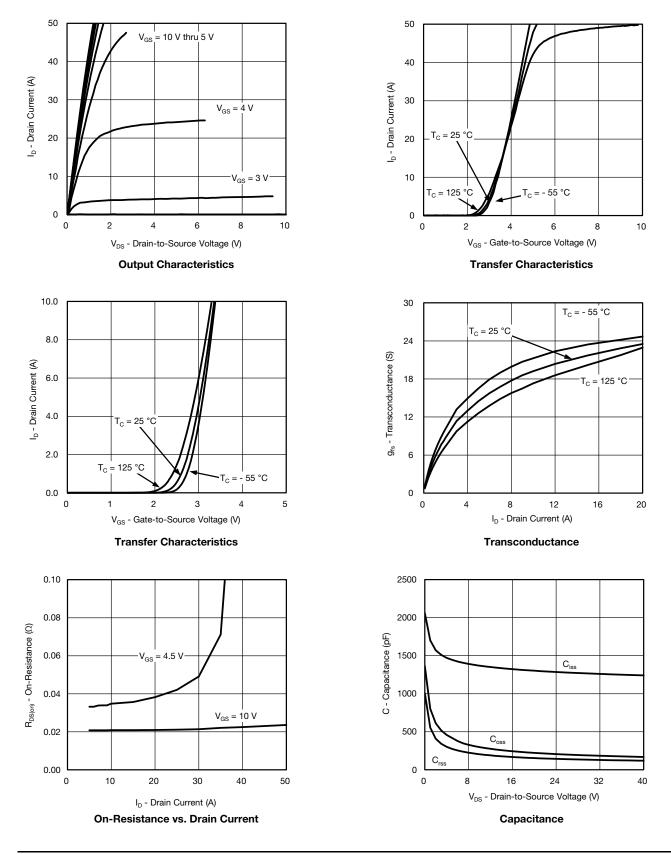


S13-2581-Rev. A, 23-Dec-13


8 contact: automostech Document Number: 62878




## **P-CHANNEL TYPICAL CHARACTERISTICS** ( $T_A = 25 \text{ °C}$ , unless otherwise noted)









Source Drain Diode Forward Voltage






**On-Resistance vs. Junction Temperature** 



**On-Resistance vs. Gate-to-Source Voltage** 



Drain Source Breakdown vs. Junction Temperature

S13-2581-Rev. A, 23-Dec-13

9


Document Number: 62878




SQJ500AEP

**Vishay Siliconix** 

## **P-CHANNEL TYPICAL CHARACTERISTICS** (T<sub>A</sub> = 25 °C, unless otherwise noted)

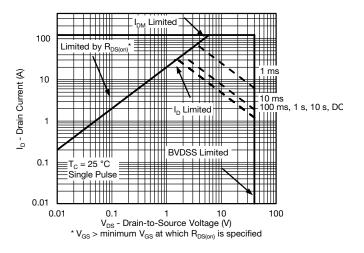


Safe Operating Area

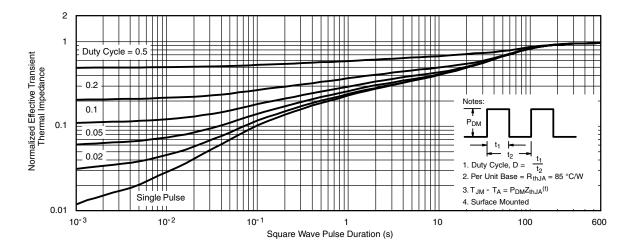

Normalized Thermal Transient Impedance, Junction-to-Ambient



## **P-CHANNEL TYPICAL CHARACTERISTICS** ( $T_A = 25 \text{ °C}$ , unless otherwise noted)

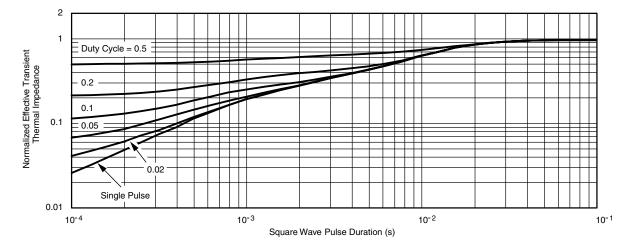

#### Normalized Thermal Transient Impedance, Junction-to-Case

#### Note

• The characteristics shown in the two graphs


- Normalized Transient Thermal Impedance Junction-to-Ambient (25 °C)


- Normalized Transient Thermal Impedance Junction-to-Case (25 °C)


are given for general guidelines only to enable the user to get a "ball park" indication of part capabilities. The data are extracted from single pulse transient thermal impedance characteristics which are developed from empirical measurements. The latter is valid for the part mounted on printed circuit board - FR4, size 1" x 1" x 0.062", double sided with 2 oz. copper, 100 % on both sides. The part capabilities can widely vary depending on actual application parameters and operating conditions.


Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see <a href="http://www.vishay.com/ppg262878">www.vishay.com/ppg262878</a>.





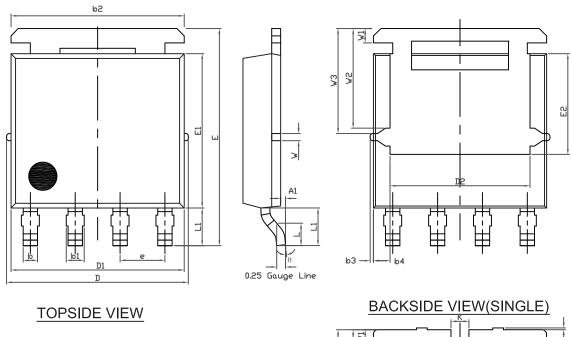



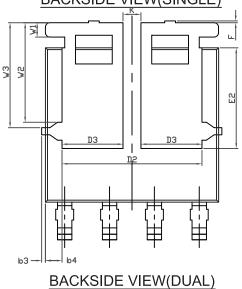

# **Package Information**



Vishay Siliconix

DIM.		MILLIMETERS		INCHES			
DINI.	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	
А	1.00	1.07	1.14	0.039	0.042	0.045	
A1	0.00	-	0.127	0.00	-	0.005	
b	0.33	0.41	0.48	0.013	0.016	0.019	
b1	0.44	0.51	0.58	0.017	0.020	0.023	
b2	4.80	4.90	5.00	0.189	0.193	0.197	
b3		0.094	•		0.004		
b4		0.47			0.019		
С	0.20	0.25	0.30	0.008	0.010	0.012	
D	5.00	5.13	5.25	0.197	0.202	0.207	
D1	4.80	4.90	5.00	0.189	0.193	0.197	
D2	3.86	3.96	4.06	0.152	0.156	0.160	
D3	1.63	1.73	1.83	0.064	0.068	0.072	
е		1.27 BSC	•	0.050 BSC			
E	6.05	6.15	6.25	0.238	0.242	0.246	
E1	4.27	4.37	4.47	0.168	0.172	0.176	
E2	2.75	2.85	2.95	0.108	0.112	0.116	
F	-	-	0.15	-	-	0.006	
L	0.62	0.72	0.82	0.024	0.028	0.032	
L1	0.92	1.07	1.22	0.036	0.042	0.048	
K		0.51	·		0.020		
W		0.23	0.009				
W1		0.41			0.016		
W2		2.82			0.111		
W3		2.96			0.117		
q	0°	-	10°	0°	-	10°	

Note

• Millimeters will gover

2



#### **RECOMMENDED MINIMUM PAD FOR PowerPAK® SO-8L DUAL**



Recommended Minimum Pads Dimensions in mm (inches) Keep-out 6.75 (0.266) x 7.75 (0.305)

Revision: 07-Feb-12



Vishay

# Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.