
Data sheet | Item number: 806-910


Board-to-Board Link; 10-pole

www.wago.com/806-910

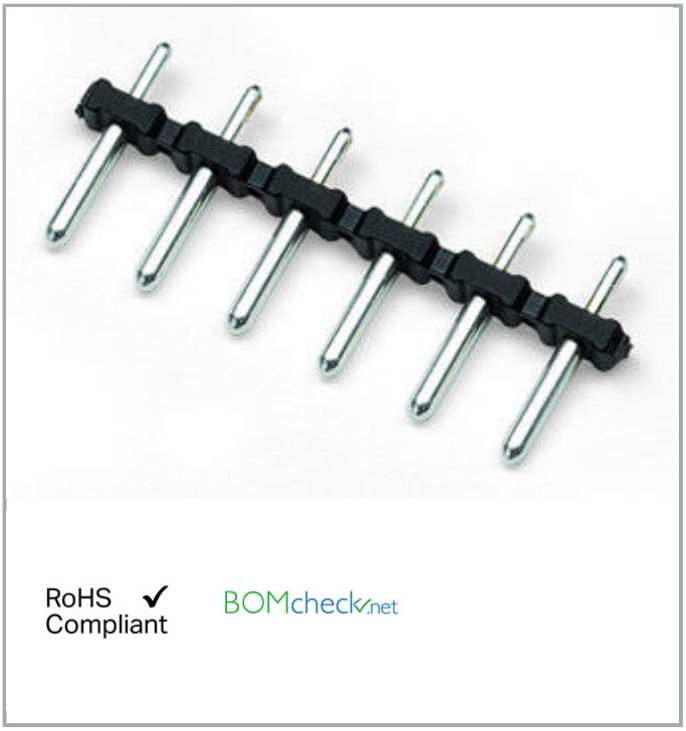

RoHS ✓ Compliant

BOMcheck.net

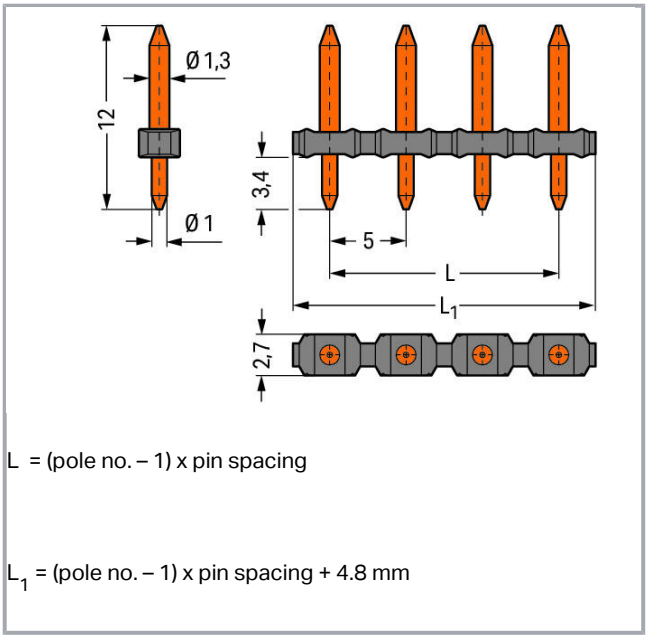

L = (pole no. – 1) x pin spacing

L_1 = (pole no. – 1) x pin spacing + 4.8 mm

Data

Connection data

Pole No.	10
Number of levels	1

Geometrical Data

Pin spacing	5 mm / 0.197 inch
Width	49,8 mm / 1.961 inch
Height	12 mm / 0.472 inch
Depth	2,7 mm / 0.106 inch
Solder pin length	3.4 mm
Solder pin diameter	1 mm
Drilled hole diameter with tolerance	$1{,}3\ ^{(+0{,}05)}$ mm

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Mechanical data

Suitable	Pin spacing: 5 mm / 0.197 inch

Plug connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for PCB

PCB contact

PCB contact	THT

Material Data

Weight	1.4 g

Commercial data

Product Group	4 (Printed Circuit)
Packaging type	BOX
Country of origin	DE
GTIN	4044918429238
Customs tariff number	85369010000

Counterpart

Downloads

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 3.6 MB	Download

CAD/CAE-Data

CAE data

EPLAN Data Portal 806-910	URL	Download

PCB Design

Symbol and Footprint 806-910	URL	Download

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

CAx data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment.

Supported formats:

- Accel EDA 14 & 15
- Altium 6 to current version
- Cadence Allegro
- DesignSpark
- Eagle Libraries
- KiCad
- Mentor Graphics BoardStation
- Mentor Graphics Design Architect
- Mentor Graphics Design Expedition 99 and 2000
- OrCAD 9.X PCB and Capture
- PADS PowerPCB 3, 3.5, 4.X, and 5.X
- PADS PowerPCB and PowerLogic 3.0
- PCAD 2000, 2001, 2002, 2004, and 2006
- Pulsonix 8.5 or newer
- STL
- 3D STEP
- TARGET 3001!
- View Logic ViewDraw
- Quadcept
- Zuken CadStar 3 and 4
- Zuken CR-5000 and CR-8000

PCB Component Libraries (EDA), PCB CAD Library Ultra Librarian

Handling Instructions

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.